



# 2023 Lighting Collection





# Beautiful lighting made **easy**



CONTACT



Eurotech Lighting is a proud 100% New Zealand family owned and operated business, who have been designing and producing glass and lighting products for Kiwi's since 1966.

Our passion is making great lighting simple to understand and accessible to "all" kiwis, regardless of budget.

We pride ourselves on designing out of the box solutions, that provide maximum flexibility for installers and provide the users of a space, a beautiful outcome.

At our core is creativity & collaboration. When communication is kept at the forefront of projects, purpose, function, and style work harmoniously together.

Use our product catalogue as your go-to quick reference guide for specification information. Our team are always available to discuss your project needs and provide expert lighting advice.



POLICY

# Easy to Buy

Scan the QR Code




Find your closest stockist

- Online
- Store

# Easy to See

Visit our Showroom  
11 Westward Ho  
Glen Eden, Auckland 0602, NZ



Order a sample with our easy  
30 day return policy

\*T&C's Apply

# Easy to Check Availability

Call Us  
09 818 6093  
Email Us

info@eurotechlighting.co.nz



Get Pricing & Availability

Sign up on our website with your  
business email

\*Available for account holders only



# Contents

<b>5</b>	Battens
<b>11</b>	Bollards
<b>17</b>	Bulkheads
<b>31</b>	Buttons
<b>51</b>	Components
<b>71</b>	Downlights
<b>93</b>	Floodlights
<b>101</b>	Lamps
<b>117</b>	Mirror Lights
<b>129</b>	Pendants
<b>155</b>	Spotlights – exterior
<b>165</b>	Spotlights – interior
<b>171</b>	Step Lights
<b>177</b>	Uplighters
<b>185</b>	Wall Lights





## Featured Battens

**Sarah**

Page 07



**Ariel**

Page 10







# Batters


## Dylan

Page 09



## Karlin

Page 08





# B Battens

## Sarah Slim Line



MORE INFO



IP RATING



DOUBLE  
INSULATED



WARRANTY

### APPLICATION

Light Commercial\* /  
Residential  
Interior

**BEAM ANGLE** 120°

**BODY** Ultra thin 43 mm

**CLASS** Double insulated

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Built-in

**INPUT FREQUENCY** 50HZ / 60HZ

**IK RATING** 08

**IP RATING** 40

**L70** 50,000hrs

**MATERIAL** Aluminium, iron,  
polycarbonate

**MOUNT** Surface

**OPERATING TEMP** -20°C to  
50°C

**POWER FACTOR** >0.95


**TECH** Integrated SMD LED

**VOLTAGE** 230V



**WARRANTY** 3 years

\*Max 12 hours operation per day

### SLIMBATTEN36W

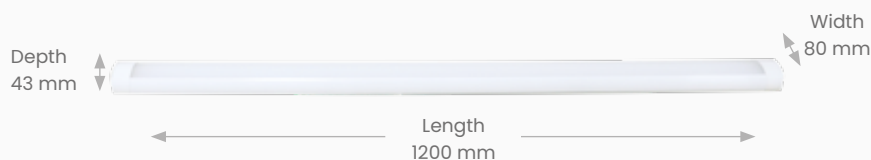

### SLIMBATTEN40W

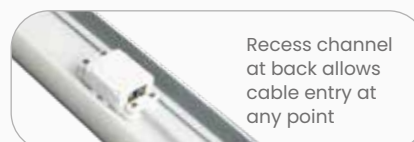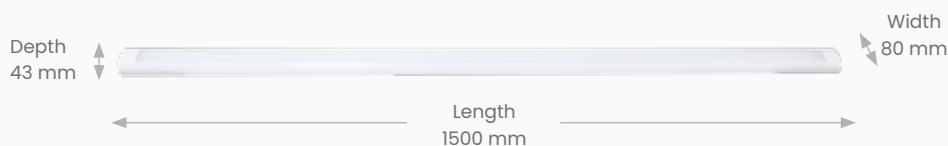

Recess channel  
at back allows  
cable entry at  
any point

### OPTIONS



CODE	SLIMBATTEN36W4K	SLIMBATTEN50W4K	SLIMBATTEN50W6K
COLOUR	White	White	White
DIMMABLE	No	No	No
LENGTH	1200 mm	1500 mm	1500 mm
KELVINS	4000K	4000K	6500K
LUMENS	4200lm	5900lm	6000lm
WATTS	36W	50W	50W






IP RATING



DIMMABLE\*



DOUBLE INSULATED



WARRANTY




MORE INFO


# B I Battens

## Karlin Tri-Colour

### KARLIN4FTCCT

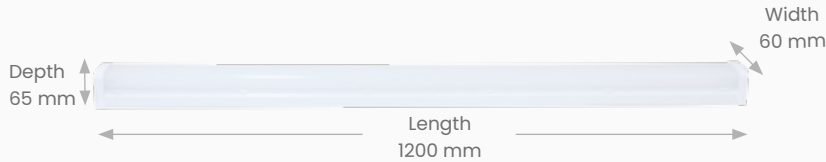

### KARLIN5FTCCT

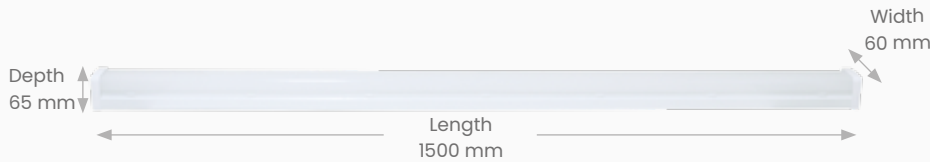

Fast click & twist connection points making installation quick and easy

#### APPLICATION

Commercial / Residential Interior

**BEAM ANGLE** 120°

**CLASS** Double insulated

**COLOUR TEMP** Tri-colour switchable, refer kelvins below

**CONDUIT ENTRY** Yes

**CRI** >80

\***DIMMABLE** Yes, with driver upgrade

**DRIVER** Built-in

**INPUT FREQUENCY** 50HZ / 60HZ

**IK RATING** 08

**IP RATING** 20

**L70** 54,000hrs

**MATERIAL** Aluminium, iron, polycarbonate

**MOUNT** Surface

**OPERATING TEMP** -20°C to 45°C

**POWER FACTOR** >0.90

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

\*Dimmable upgrade available.

## OPTIONS



CODE	KARLIN4FTCCT	KARLIN5FTCCT	KARLIND - Dimmable Driver
COLOUR	White	White	White
LENGTH	1200 mm	1500 mm	-
KELVINS	3000K / 4000K / 6500K	3000K / 4000K / 6500K	-
LUMENS	3960lm / 4500lm / 4140lm	5550lm / 6250lm / 5750lm	-
WATTS	36W	50W	-

\*Dimmable driver  
\*Driver for 5FT Batten only  
\*Refer compatibility chart online.

# B Battens

## Dylan Double Insulated

### APPLICATION

Commercial / Residential Interior

### BEAM ANGLE 120°

**CLASS** Double insulated

**COLOUR TEMP** Fixed colour temperature, refer kelvins below

**CONDUIT ENTRY** Yes

**CRI** >80

**DIMMABLE** No

**DRIVER** Built-in / Replaceable

**INPUT FREQUENCY** 50HZ / 60HZ

**IK RATING** 08

**IP RATING** 40

**L70** 50,000hrs

**MATERIAL** Aluminium, iron, polycarbonate

**MOUNT** Surface

**OPERATING TEMP** -20°C to 50°C

**TECH** Integrated SMD LED

**VOLTAGE** 230V


**WARRANTY** 5 years



MORE INFO



IP RATING




DOUBLE INSULATED




WARRANTY


### LEDBATTEN40W

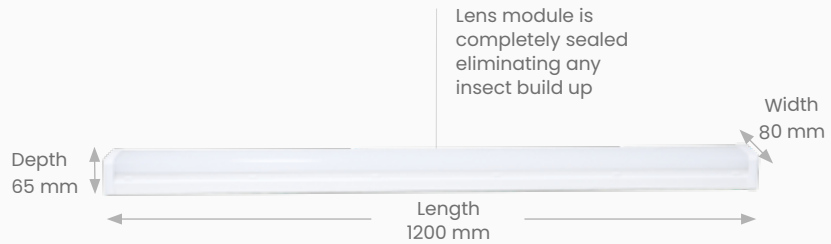

### LEDBATTEN60W

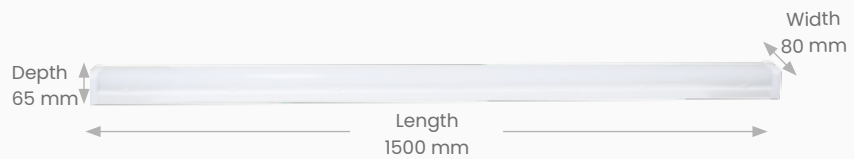

Fast click & twist connection points making installation quick and easy

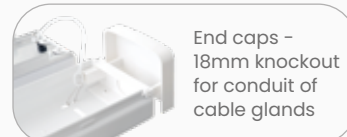

End caps - 18mm knockout for conduit of cable glands

### OPTIONS



CODE	LEDBATTEN40W4K	LEDBATTEN60W4K	DYLAND40	DYLAND60
COLOUR	White	White	White	White
DOUBLE INSULATED	Yes	Yes	-	-
LENGTH	1200 mm	1500 mm	-	-
KELVINS	4000K	4000K	-	-
LUMENS	3800lm	5700lm	-	-
WATTS	40W	60W	40W	60W

\*1200mm compatible

\*1500mm compatible





IP RATING



WATTAGE  
SELECTABLE



CCT  
SELECTABLE



WARRANTY



MORE INFO

# B Battens

## Ariel Tri-Coloured Tri-Wattage



**Emergency Batten Specification  
ARIEL5FTIP65E**

Battery Type: LiFePO4 6.4V 3Ah  
 Emergency Wattage: 3W  
 Emergency Run Time: 3 hours  
 Recharge Time >16 hours

**APPLICATION**

Commercial  
Interior/ Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Tri-colour  
switchable

**CONDUIT ENTRY** Yes

**CRI** >80

**DIMMABLE** No

**DRIVER** Built-in

**INPUT FREQUENCY** 50HZ / 60HZ

**IK RATING** 08

**IP RATING** 65

**L70** 54,000hrs

**MATERIAL** Stainless Steel, iron,  
polycarbonate

**MOUNT** Surface

**OPERATING TEMP** -20°C to  
45°C

**POWER FACTOR** >0.95

**TECH** Integrated SMD LED

**VOLTAGE** 220--240V

**WARRANTY** 3/ 5 years

### OPTIONS



CODE	ARIEL5FTIP65	ARIEL5FTIP65E
COLOUR	White	White
LENGTH	1500 mm	1500 mm
KELVINS	4000K / 5000K / 6500K	4000K / 5000K / 6500K
WATTS	33W/ 40W/ 50W/ 60W	33W/ 40W/ 50W/ 60W
LUMENIOUS FLUX	125 lm/W	125 lm/W
WARRANTY	5 Years	3 Years



## Featured Bollards

**W800**

Page 13



**Elita**

Page 14





# Bollards



## Draco

Page 15



# Bollards

## W800

**APPLICATION**

Commercial  
Exterior

**BEAM ANGLE** 180°

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**MATERIAL** Die-cast aluminium,  
marine grade paint, PC lens

**MOUNT** Surface

**OPERATING TEMP** -25°C to  
40°C

**POWER FACTOR** >0.92

**TECH** Integrated LED

**VOLTAGE** 230

**WARRANTY** 3 years.



MORE INFO



IP RATING



WARRANTY

Low glare  
reflectors

Powder coated  
marine grade  
paint for increased  
weather protection

Detachable  
base plate for  
easy mounting

Height  
800 mm

Diameter  
Ø168 mm

### OPTIONS



**CODE** WBLD25W

**COLOUR** Black

**TYPE** 4000K

**WATTS** 940lm

**VOLTAGE** 25W





IP RATING



WARRANTY



DIMMABLE



MORE INFO

# Bollards

## Elita

**APPLICATION**  
Commercial / Residential  
Exterior

**BEAM ANGLE** 115°

**COLOUR TEMP** Lamp  
dependent

**DIMMABLE** Yes, lamp  
dependent

**DRIVER** Not required\*

**IK RATING** 08

**IP RATING** 65

**L70** Lamp dependent

**LAMP** E27 replaceable lamp

**LENS** Frosted PC

**MATERIAL** Die-cast aluminium,  
marine grade paint

**MOUNT** Surface


**TECH** Replaceable lamp

**VOLTAGE** 230V or 12V\*

**WARRANTY** 5 years

\*Convert to 12V by using our 12V LED  
lamp 12VA60E278W & driver.

\*\*Dimmable only with  
a capable lamp.

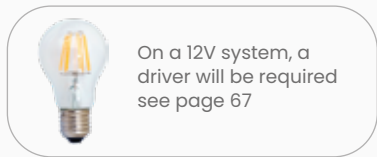

### OPTIONS



CODE	BL210-650	BL210-850	12VA60E278W	LEDA60E278W
COLOUR	Black	Black	-	-
SIZE	Small	Large	E27 Lamp	E27 Lamp
WATTS	15W Max	15W Max	8W	8W
VOLTAGE	230V or 12V	230V or 12V	12V	230V

# Bollards

## Draco

### APPLICATION

Residential  
Exterior

### BEAM ANGLE 120°

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Requires separate  
12V DC driver, refer page 67

**IK RATING** 07

**IP RATING** 54

**L70** 30,000hrs

**LIGHT DIRECTION** Down

**MATERIAL** Pre-treated  
corrosion resistant aluminium  
with electrophoretic coating,  
UV stable polycarbonate lens

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 12V DC

**WARRANTY** 2 years



MORE INFO



IP RATING



WARRANTY

RB602-6003K



### OPTIONS



CODE	RB602-6003K	RB502-7003K	RB702-6003K
COLOUR	Charcoal	Charcoal	Charcoal
KELVINS	3000K	3000K	3000K
LUMENS	560lm	370lm	1620lm (2 x 810lm)
WATTS	6W	6.5W	17W (2 x 8.5W)

\*view full specs online

\*view full specs online



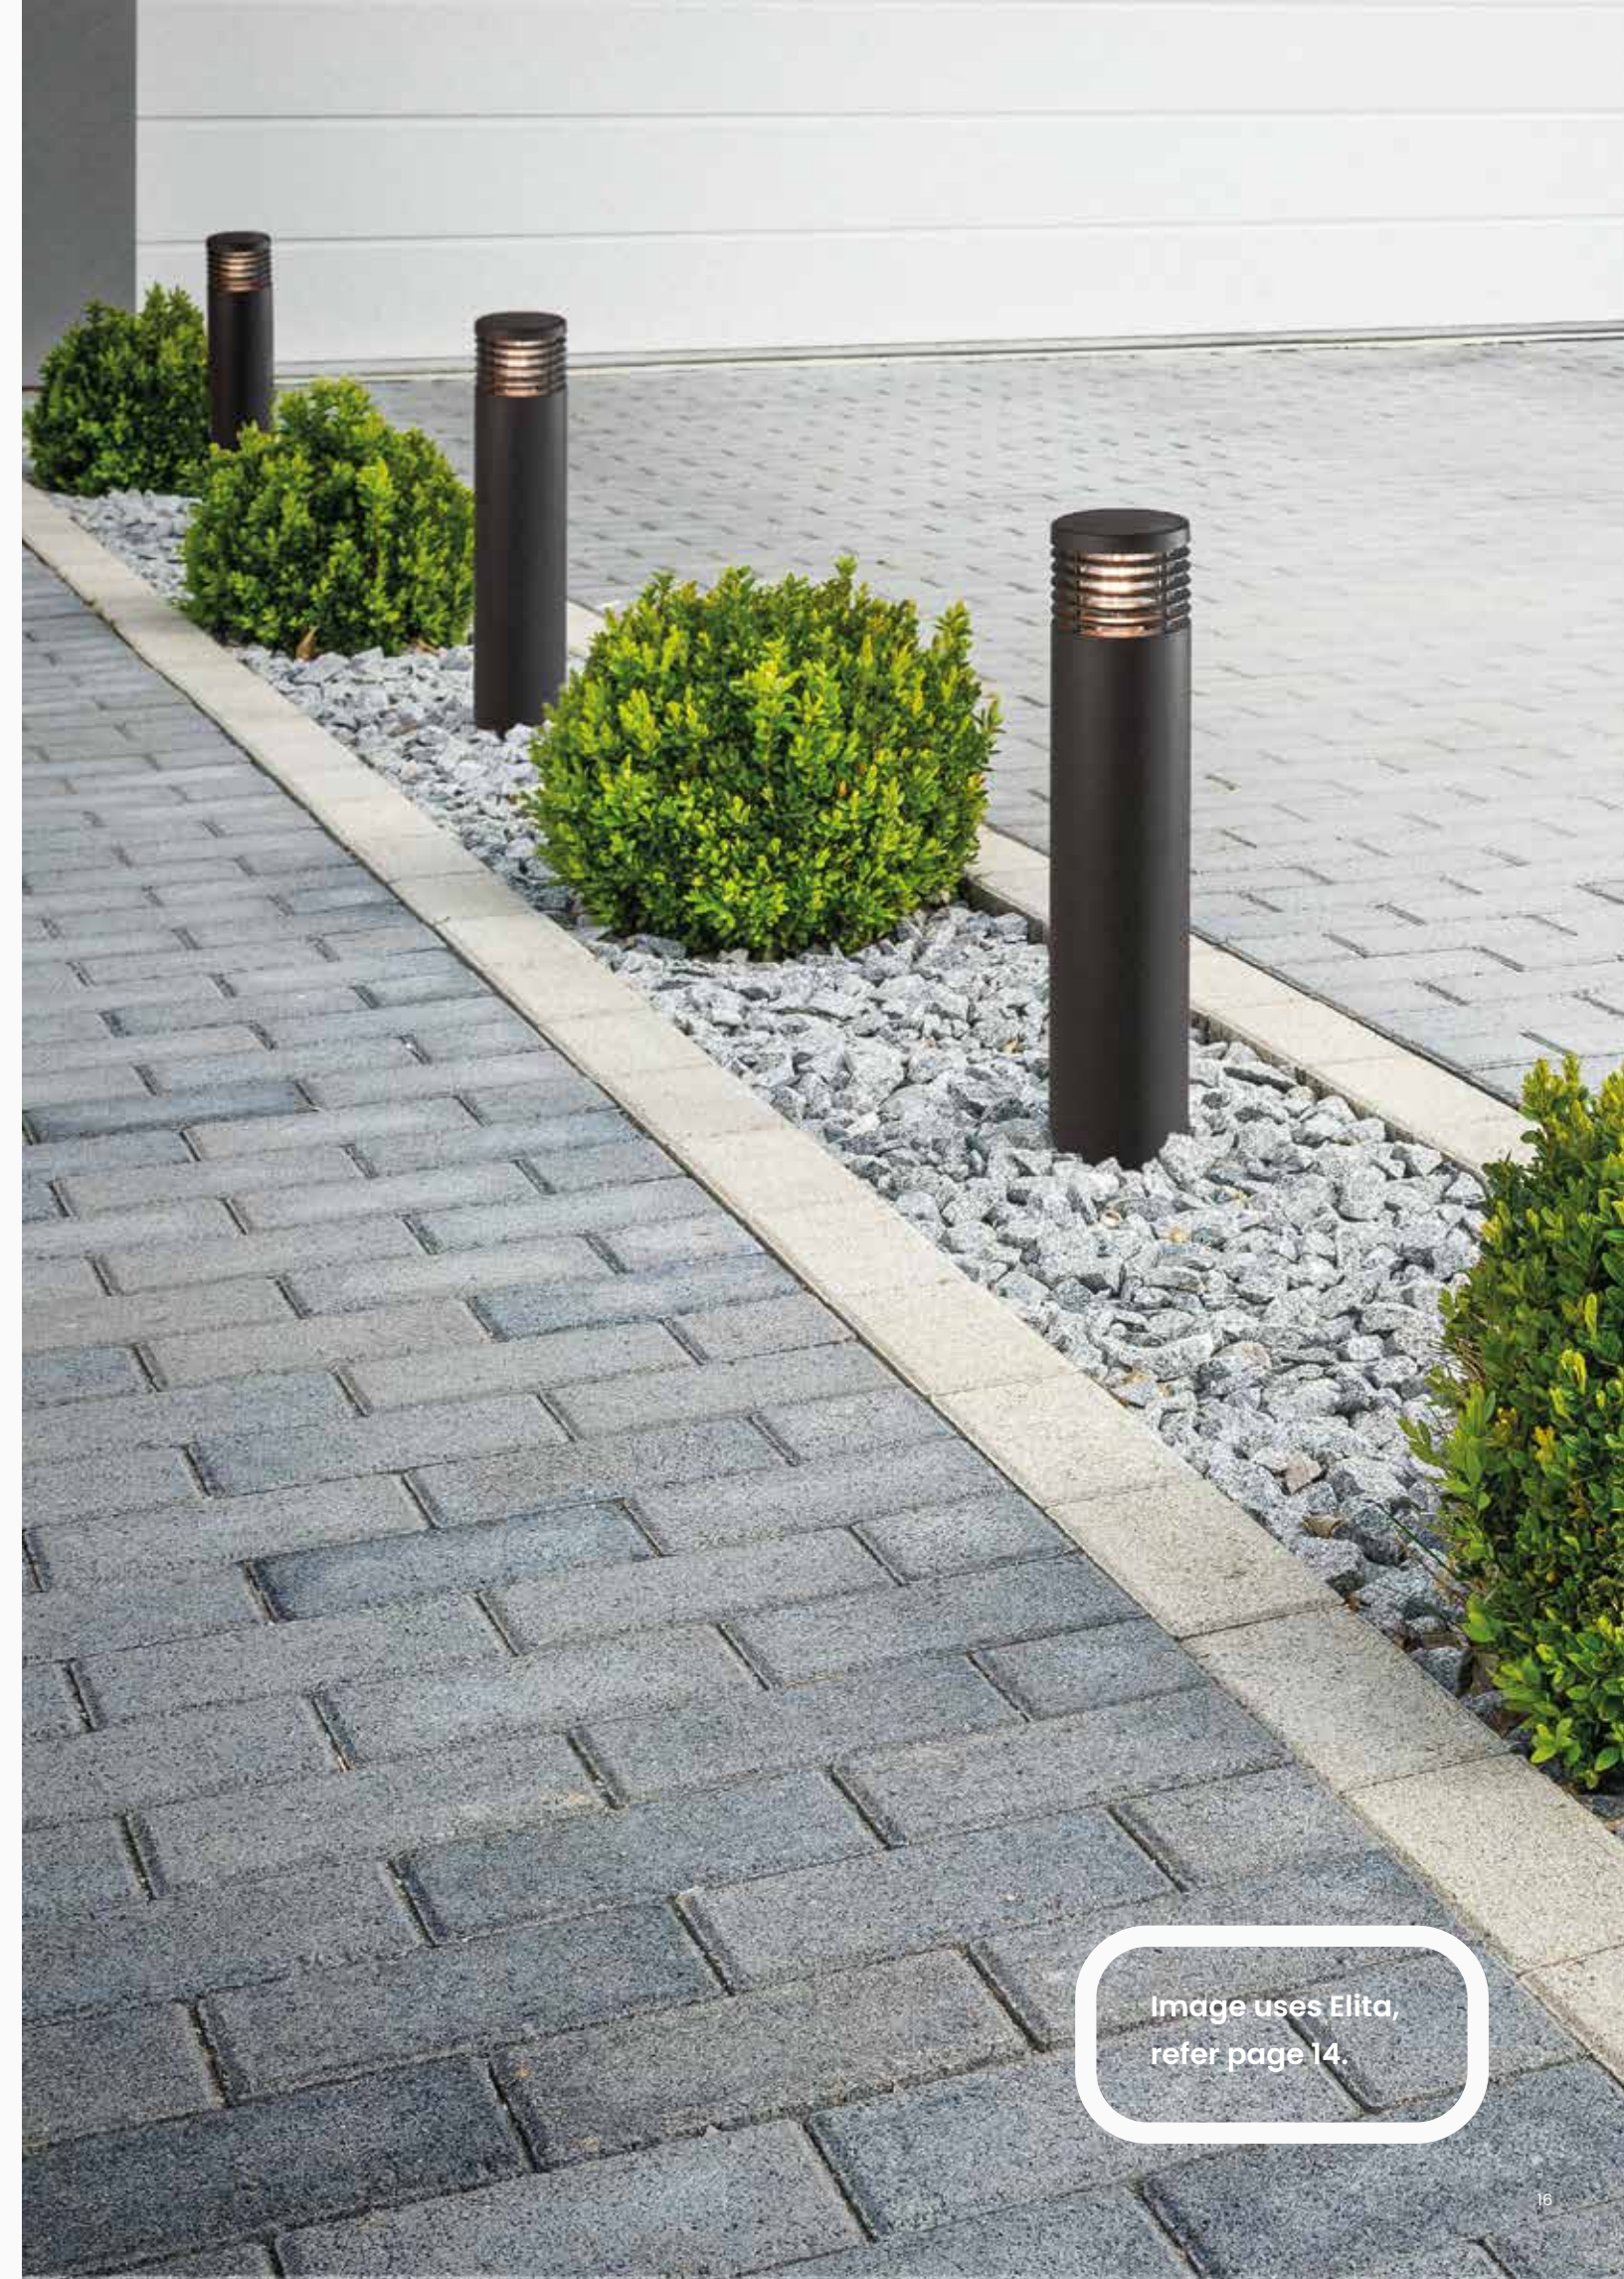


Image uses Elita,  
refer page 14.





## Knockout Conduit Bulkheads Family


### Burly K05 Round

Page 20



### Burly K05 Square

Page 21







# Bulkheads

## Burly K06

Page 19



# Bulkheads

## Burly KO Conduit Entry K06

### APPLICATION

Commercial / Residential  
Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Tri-colour  
switchable

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 54,000hrs

**KNOCKOUT POINTS** 6

**MATERIAL** UV resistant  
polycarbonate (suitable for  
coastal conditions)

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 230V


**WARRANTY** 3 years



MORE INFO



IP RATING



DOUBLE  
INSULATED



WARRANTY



Width  
125 mm

Length  
245 mm



Depth  
97 mm




### OPTIONS

CODE	KO12W4K-WHCCT	KO12W4K-BLKCCT
COLOUR	White	Black
KELVINS	3000K / 4000K / 6500K	3000K / 4000K / 6500K
LUMENS	796lm / 894lm / 828lm	796lm / 894lm / 828lm
WATTS	12W	12W



IP RATING



DOUBLE INSULATED



WARRANTY



MORE INFO

# Bulkheads

## Burly KO Conduit Entry K05 Round



Diameter  
Ø282 mm



Depth  
85 mm



### OPTIONS

<b>CODE</b>	<b>SBR14W</b>
<b>COLOUR</b>	White
<b>KELVINS</b>	4000K
<b>LUMENS</b>	1200lm
<b>TYPE</b>	Round
<b>WATTS</b>	14W

#### APPLICATION

Commercial / Residential Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Fixed colour, refer kelvins below

**CONDUIT ENTRY SIZE** Suitable for 20mm conduit and lock nut

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 54,000hrs

**KNOCKOUT POINTS** 4

**MATERIAL** UV resistant polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -10°C to 40°C

**POWER FACTOR** >0.5

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years



# Bulkheads

## Burly Conduit Entry K05 Square

### APPLICATION

Commercial / Residential Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Fixed colour, refer kelvins below

**CONDUIT ENTRY SIZE** Suitable for 20mm conduit and lock nut

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 54,000hrs

**KNOCKOUT POINTS** 4

**MATERIAL** UV resistant polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -10°C to 40°C

**POWER FACTOR** >0.5

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years



### OPTIONS


<b>CODE</b>	SBS14W
<b>COLOUR</b>	White
<b>KELVINS</b>	4000K
<b>LUMENS</b>	1200lm
<b>TYPE</b>	Square
<b>WATTS</b>	14W



MORE INFO



IP RATING



DOUBLE INSULATED




WARRANTY





IP RATING



DOUBLE INSULATED



DUAL FASCIA



WARRANTY



MORE INFO

# Bulkheads

## Arc One-way



Height 113 mm

Length 220 mm



Depth 51 mm

### APPLICATION

Residential  
Exterior

**BEAM ANGLE** 105°

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 30,000hrs

**LIGHT DIRECTION** One-way

**MATERIAL** UV resistant, anti-corrosion ABS, polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C to 50°C

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 3 years

Includes both white and black covers in each box

### OPTIONS



**CODE** LSO2202CCT

**COLOUR** White & Black

**KELVINS** 3000K / 4000K / 6000K

**LUMENS** 340lm / 370lm / 360lm

**WATTS** 6W


# B Bulkheads



MORE INFO



IP RATING



DOUBLE INSULATED



WARRANTY

## Arc Up / Down

### APPLICATION

Residential  
Exterior

**BEAM ANGLE** 160°

**COLOUR TEMP** Fixed colour & Tri-colour switchable, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 30,000hrs

**LIGHT DIRECTION** Up / Down

**MATERIAL** UV resistant, anti-corrosion ABS, polycarbonate body and diffuser (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C to 50°C

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 3 years




### OPTIONS

CODE	LKU3213CCT-BLK	LKU3213CCT-WH
COLOUR	Black	White
KELVINS	3000K / 4000K / 6000K	3000K / 4000K / 6000K
LUMENS	350lm / 370lm / 360lm	350lm / 370lm / 360lm
WATTS	13W	13W





IP RATING



DOUBLE INSULATED



WARRANTY



MORE INFO

# Bulkheads

## Ovate Classic



Width  
105 mm

Length  
230 mm



Depth  
58.5 mm

**APPLICATION**  
Commercial / Residential  
Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Fixed,  
refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 36,000hrs

**MATERIAL** UV resistant ABS,  
polycarbonate (suitable for  
coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C  
to 50°C

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### OPTIONS



CODE	YBH12W3K-WH	YBH12W4K-WH	YBH12W3K-BLK	YBH12W4K-BLK
COLOUR	White	White	Black	Black
KELVINS	3000K	4000K	3000K	4000K
LUMENS	1030lm	1050lm	1030lm	1050lm
WATTS	12W	12W	12W	12W

# B Bulkheads




MORE INFO



WARRANTY



IP RATING



DOUBLE INSULATED



DIMMABLE

## Ovate Dimmable

### APPLICATION

Commercial / Residential  
Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Fixed, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer compatibility downloads online

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 36,000hrs

**MATERIAL** UV resistant ABS, polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C to 50°C

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years




### OPTIONS



<b>CODE</b>	YBHDIM3K-WH
<b>COLOUR</b>	White
<b>KELVINS</b>	3000K
<b>LUMENS</b>	1050lm
<b>WATTS</b>	12W



IP RATING



DOUBLE INSULATED



WARRANTY



MORE INFO

# Bulkheads

## Ovate Eyelid



**APPLICATION**  
Commercial / Residential  
Exterior

**BEAM ANGLE** 110°

**COLOUR TEMP** Fixed,  
refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 36,000hrs

**MATERIAL** UV resistant ABS,  
polycarbonate (suitable for  
coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C  
to 50°C

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### OPTIONS



CODE	YBE12W3K-WH	YBE12W4K-WH	YBE12W3K-BLK	YBE12W4K-BLK
<b>COLOUR</b>	White	White	Black	Black
<b>KELVINS</b>	3000K	4000K	3000K	4000K
<b>LUMENS</b>	600lm	650lm	600lm	650lm
<b>WATTS</b>	12W	12W	12W	12W



# B Bulkheads

## Ovate+




MORE INFO



DUAL FASCIA



IP RATING



DOUBLE INSULATED



WARRANTY

### APPLICATION

Commercial / Residential  
Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 36,000hrs

**MATERIAL** UV resistant ABS,  
polycarbonate (suitable for  
coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C  
to 50°C

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

Includes both Classic & Eyelid  
covers in each box




### OPTIONS

CODE	YBCCT-WH	YBCCT-BLK
<b>COLOUR</b>	White	Black
<b>KELVINS</b>	3000K / 4000K / 5000K	3000K / 4000K / 5000K
<b>LUMENS</b>	*930lm / 1070lm / 970lm	*930lm / 1070lm / 970lm
<b>WATTS</b>	12W	12W

\*Lumens shown for non eyelid model



IP RATING



DOUBLE INSULATED



WARRANTY



SENSOR



MORE INFO

# Bulkheads

## Ovate Sensor



**APPLICATION**

Commercial / Residential Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Tri-colour switchable, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 36,000hrs

**MATERIAL** UV resistant ABS, polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C to 50°C

**SENSOR** Integrated PIR sensor

- **DETECTION DISTANCE** 6m

- **LUX** Adjustable dial

- **TIME ADJUSTABLE** 5sec-8min

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### OPTIONS



CODE	YBHPIR-WH	YBHPIR-BLK
COLOUR	White	Black
KELVINS	3000K / 4000K / 5000K	3000K / 4000K / 5000K
LUMENS	930lm / 1070lm / 970lm	930lm / 1070lm / 970lm
WATTS	12W	12W

# B Bulkheads




MORE INFO



DUAL FASCIA



IP RATING



DOUBLE INSULATED



WARRANTY

## Ovate Elite Classic

### APPLICATION

Commercial / Residential  
Exterior

**BEAM ANGLE** 130°

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 36,000hrs

**MATERIAL** UV resistant polycarbonate (suitable for coastal conditions)

**MOUNT** Surface


**OPERATING TEMP** -20°C to 50°C

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

Includes both white and black trims in each box

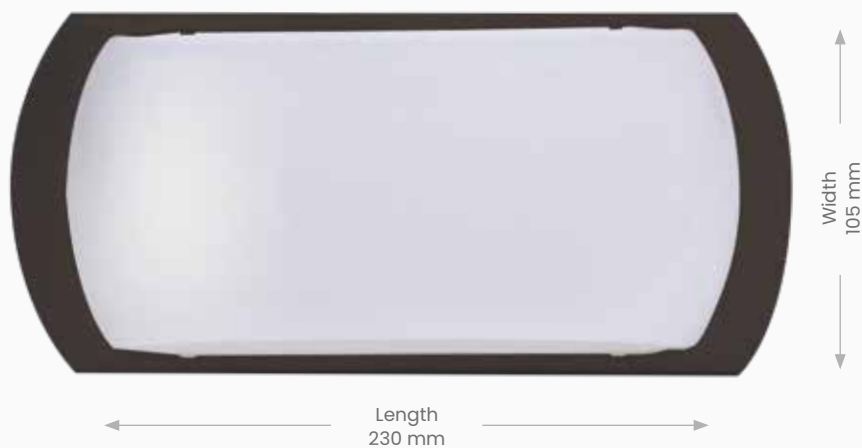


### OPTIONS

<b>CODE</b>	YBM12WCCT
<b>COLOUR</b>	2 trims included Black & White
<b>KELVINS</b>	3000K / 4000K / 5000K
<b>LUMENS</b>	930lm / 1070lm / 970lm
<b>WATTS</b>	12W





IP RATING



DOUBLE INSULATED



WARRANTY



DUAL FASCIA



MORE INFO

# Bulkheads

## Ovate Elite X

**APPLICATION**

Commercial / Residential Exterior

**BEAM ANGLE** 130°

**COLOUR TEMP** Tri-colour switchable, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 36,000hrs

**MATERIAL** UV resistant polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C to 50°C

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

Includes both white and black X-covers in each box



Width 105 mm

Length 230 mm



Depth 72 mm



### OPTIONS

**CODE** YBX12WCCT

**COLOUR** 2 X-covers included Black & White

**KELVINS** 3000K / 4000K / 5000K

**LUMENS** 500lm / 650lm / 600lm

**WATTS** 12W



## Featured Buttons

**Easy B**

Page 33



**YY**

Page 34



**EV**

Page 43



# Buttons



## Slim B

Page 40



## Buxon

Page 49



## Venius

Page 47





# B Buttons



MORE INFO



IP RATING



DIMMABLE



DOUBLE INSULATED



WARRANTY

## Easy B Quick Install Button

### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 30,000hrs

**MATERIAL** UV resistant  
polycarbonate

**MOUNT** Surface

**OPERATING TEMP** -20°C  
to 50°C

**SWITCHING CAPACITY** 50,000

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### TIMESAVER INSTALL FEATURES

- Screw through base
- Centralised cable entry
- Push terminals
- Hinged LED board  
(no screws)

MEDIUM



LARGE



## OPTIONS



CODE	QB18	QB24
COLOUR	White	White
KELVINS	3000K / 4000K / 6000K	3000K / 4000K / 6000K
LUMENS	1450lm / 1600lm / 1550lm	2450lm / 2600lm / 2500lm
SIZE	Medium	Large
WATTS	18W	24W




WARRANTY



IP RATING



DIMMABLE



DOUBLE INSULATED



MORE INFO



# B Buttons

## YYR15 Round Small

**APPLICATION**

Commercial / Residential Interior / Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Fixed & Tri-colour switchable models refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 54

**MATERIAL** UV resistant polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C to 50°C


**SWITCHING CAPACITY** 30,000

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### OPTIONS



CODE	YYR15W3K	YYR15W4K	YYR15WCCT
COLOUR	White	White	White
KELVINS	3000K	4000K	3000K / 4000K / 6000K
LUMENS	1200lm	1250lm	1250lm / 1300lm / 1350lm
WATTS	15W	15W	15W

# B Buttons




MORE INFO



IP RATING



DIMMABLE



DOUBLE INSULATED



WARRANTY

## YYR18 Round Medium

### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Fixed &  
Tri-colour switchable models  
refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 54

**MATERIAL** UV resistant  
polycarbonate (suitable for  
coastal conditions)

**MOUNT** Surface



**OPERATING TEMP** -20°C  
to 50°C

**SWITCHING CAPACITY** 30,000

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS

CODE	YYR18W3K	YYR18W4K	YYR18WCCT
COLOUR	White	White	White
KELVINS	3000K	4000K	3000K / 4000K / 6000K
LUMENS	1450lm	1500lm	1550lm / 1600lm / 1650lm
WATTS	18W	18W	18W






WARRANTY



IP RATING



DIMMABLE



DOUBLE INSULATED



MORE INFO

# B Buttons

## YYR24 Round Large



### APPLICATION

Commercial / Residential Interior / Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Fixed & Tri-colour switchable models refer kelvin belows

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 54, suitable for coastal installations

**MATERIAL** UV resistant polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C to 50°C




**SWITCHING CAPACITY** 30,000

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### OPTIONS



CODE	YYR24W3K	YYR24W4K	YYR24WCCT	YYREYLID
COLOUR	White	White	White	White
KELVINS	3000K	4000K	3000K / 4000K / 6000K	-
LUMENS	2000lm	2050lm	2150lm / 2250lm / 2300lm	-
WATTS	24W	24W	24W	-

\*Does not include button. Accessory item only.

# B Buttons



MORE INFO



IP RATING



DIMMABLE



DOUBLE INSULATED



WARRANTY

## YYS15 Square Small

### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 120°

**COLOUR TEMP** Tri-colour  
switchable model  
refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 54

**MATERIAL** UV resistant  
polycarbonate (suitable for  
coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C  
to 50°C

**SWITCHING CAPACITY** 30,000

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS



<b>CODE</b>	YYS15WCCT
<b>COLOUR</b>	White
<b>KELVINS</b>	3000K / 4000K / 6000K
<b>LUMENS</b>	1250lm / 1300lm / 1350lm
<b>WATTS</b>	15W




WARRANTY



IP RATING



DIMMABLE



DOUBLE INSULATED



MORE INFO



# B Buttons

## YYS18 Square Medium

### APPLICATION

Commercial / Residential Interior / Exterior

### BEAM ANGLE 120°

**COLOUR TEMP** Tri-colour switchable model refer kelvins below

### CRI >80

**DIMMABLE** Yes, refer compatibility download online

### DRIVER Integral

### IK RATING 08

### IP RATING 54

**MATERIAL** UV resistant polycarbonate (suitable for coastal conditions)

### MOUNT Surface

**OPERATING TEMP** -20°C to 50°C

### SWITCHING CAPACITY 30,000

### TECH Integrated SMD LED

### VOLTAGE 230V

### WARRANTY 5 years

## OPTIONS



<b>CODE</b>	YYS18WCCT
<b>COLOUR</b>	White
<b>KELVINS</b>	3000K / 4000K / 6000K
<b>LUMENS</b>	1550lm / 1600lm / 1650lm
<b>WATTS</b>	18W



# B Buttons

## YYS24 Square Large

### APPLICATION

Commercial / Residential  
Interior / Exterior

### BEAM ANGLE 120°

**COLOUR TEMP** Tri-colour  
switchable model  
refer kelvins below

### CRI >80

**DIMMABLE** Yes, refer  
compatibility download online

### DRIVER Integral

### IK RATING 08

### IP RATING 54

**MATERIAL** UV resistant  
polycarbonate (suitable for  
coastal conditions)

### MOUNT Surface

**OPERATING TEMP** -20°C  
to 50°C

### SWITCHING CAPACITY 30,000

**TECH** Integrated SMD LED

### VOLTAGE 230V

### WARRANTY 5 years




MORE INFO



IP RATING




DIMMABLE



DOUBLE  
INSULATED



WARRANTY

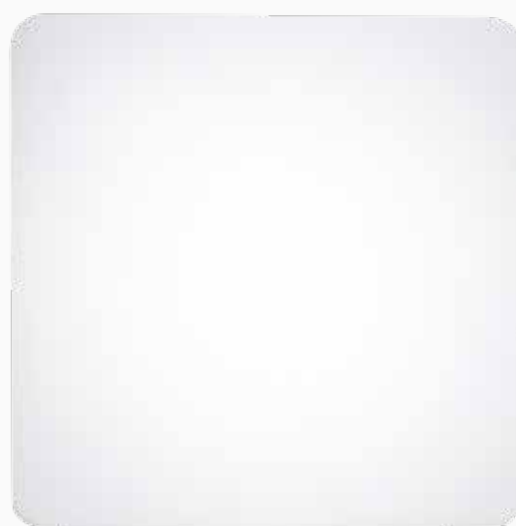

Front face  
330 mm<sup>2</sup>



## OPTIONS


<b>CODE</b>	YYS24WCCT
<b>COLOUR</b>	White
<b>KELVINS</b>	3000K / 4000K / 6000K
<b>LUMENS</b>	2150lm / 2250lm / 2300lm
<b>WATTS</b>	24W



IP RATING



DIMMABLE



DOUBLE INSULATED



WARRANTY



MORE INFO

# B Buttons

## SlimB-180 Small

**APPLICATION**

Residential Interior

**BEAM ANGLE** 110°

**COLOUR TEMP** Fixed colour, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Integral

**IP RATING** 20

**L70** 30,000hrs

**MATERIAL** Polycarbonate

**MOUNT** Surface or recessed


**OPERATING TEMP** -20°C to 50°C

**SWITCHING CAPACITY** 15,000

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

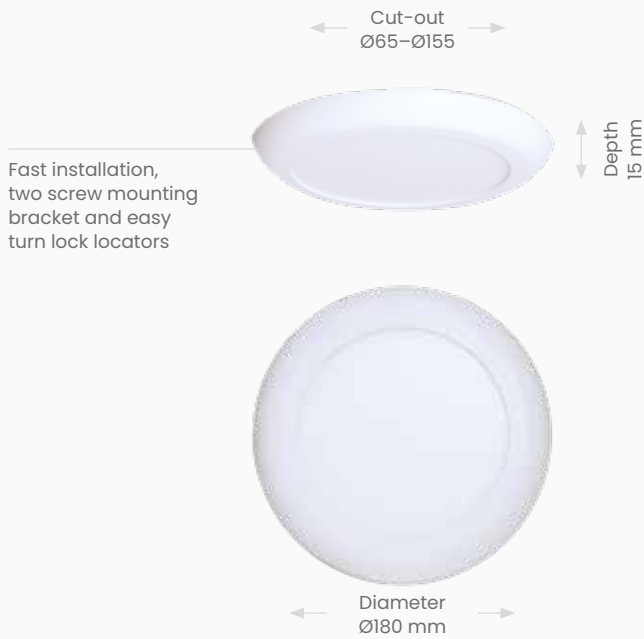

### OPTIONS



CODE	SLIMB180-3K	SLIMB180-4K
COLOUR	White	White
KELVINS	3000K	4000K
LUMENS	840lm	900lm
WATTS	12W	12W

# B Buttons

## SlimB-230 Medium




MORE INFO



IP RATING



DIMMABLE



DOUBLE INSULATED



WARRANTY

### APPLICATION

Residential  
Interior

**BEAM ANGLE** 110°

**COLOUR TEMP** Fixed colour, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Integral

**IP RATING** 20

**MATERIAL** Polycarbonate

**MOUNT** Surface or recessed

**OPERATING TEMP** -20°C to 50°C

**SWITCHING CAPACITY** 15,000

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years



### OPTIONS


CODE	SLIMB230-3K	SLIMB230-4K
COLOUR	White	White
KELVINS	3000K	4000K
LUMENS	1200lm	1300lm
WATTS	18W	18W



IP RATING



DIMMABLE



DOUBLE INSULATED



WARRANTY



MORE INFO

# B Buttons

## SlimB-330 Large



Depth  
25 mm



Diameter  
Ø330 mm



**APPLICATION**  
Residential  
Interior / Exterior

**BEAM ANGLE** 110°

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Integral

**IP RATING** 54

**L70** 30,000hrs

**MATERIAL** Polycarbonate

**MOUNT** Surface only\*

**OPERATING TEMP** -20°C  
to 50°C

**SWITCHING CAPACITY** 15,000

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

\*This Large model is surface mount  
only. It can't be used with recessed  
clips due to weight

### OPTIONS

CODE	SLIMB330-3K	SLIMB330-4K
COLOUR	White	White
KELVINS	3000K	4000K
LUMENS	2000lm	2200lm
WATTS	24W	24W



# B Buttons



MORE INFO



IP RATING



WARRANTY

## EV14 Small

### APPLICATION

Residential  
Interior

**BEAM ANGLE** 180°

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 20

**IK RATING** 06

**L70** 36,000hrs

**MATERIAL** Steel backplate,  
PMMA diffuser lens

**MOUNT** Surface

**SWITCHING CAPACITY** 30,000

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 3 years

### FINISH COLOURS

- White
- Silver



Depth  
50 mm



Diameter  
Ø290 mm



## OPTIONS

CODE	EV14W3K-WH	EV14W3K-SL	EV14W4K-WH	EV14W4K-SL
<b>COLOUR</b>	White	Silver	White	Silver
<b>DIMMABLE</b>	No	No	No	No
<b>KELVINS</b>	3000K	3000K	4000K	4000K
<b>LUMENS</b>	1000lm	1000lm	1150lm	1150lm
<b>WATTS</b>	14W	14W	14W	14W



IP RATING



WARRANTY



MORE INFO

# B Buttons

## EV20 Medium



Depth  
50 mm



Diameter  
Ø350 mm

**APPLICATION**

Residential  
Interior

**BEAM ANGLE** 180°

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 20

**IK RATING** 06

**L70** 36,000hrs

**MATERIAL** Steel backplate,  
PMMA diffuser lens

**MOUNT** Surface

**SWITCHING CAPACITY** 30,000

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 3 years

**FINISH COLOURS**

White

Silver



### OPTIONS

CODE	EV20W3K-WH	EV20W3K-SL	EV20W4K-WH	EV20W4K-SL
COLOUR	White	Silver	White	Silver
DIMMABLE	No	No	No	No
KELVINS	3000K	3000K	4000K	4000K
LUMENS	1500lm	1500lm	1700lm	1700lm
WATTS	20W	20W	20W	20W

# B Buttons



MORE INFO



IP RATING



WARRANTY

## EV28 Large

### APPLICATION

Residential  
Interior

**BEAM ANGLE** 180°

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 20

**IK RATING** 06

**L70** 36,000hrs

**MATERIAL** Steel backplate,  
PMMA diffuser lens

**MOUNT** Surface

**SWITCHING CAPACITY** 30,000

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 3 years

### FINISH COLOURS

White

Silver



Depth  
50 mm



Diameter  
Ø380 mm



### OPTIONS

CODE	EV28W3K-WH	EV28W3K-SL	EV28W4K-WH	EV28W4K-SL
<b>COLOUR*</b>	White	Silver	White	Silver
<b>DIMMABLE</b>	No	No	No	No
<b>KELVINS</b>	3000K	3000K	4000K	4000K
<b>LUMENS</b>	2200lm	2200lm	2450lm	2450lm
<b>WATTS</b>	28W	28W	28W	28W

\*White and silver covers are interchangeable.



Image uses Buxon,  
refer page 49.



# B Buttons



MORE INFO



IP RATING



DIMMABLE



WARRANTY

## Venius V01

### APPLICATION

Commercial / Residential Interior

**BEAM ANGLE** 115°

**COLOUR TEMP** Tri-colour switchable, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Integral

**IP RATING** 20

**MATERIAL** Aluminium frame, plastic diffuser

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### FINISH COLOURS

- Black
- White
- Brushed Coffee

### SMALL



### LARGE



### OPTIONS



CODE	HV3535W-BLK	HV3535W-WH	HV3535W-BBC	HV3550W-BLK	HV3550W-WH	HV3550W-BBC
<b>COLOUR</b>	Black	White	Brushed Coffee	Black	White	Brushed Coffee
<b>KELVINS</b>	3000K / 3500K / 4000K	3000K / 3500K / 4000K	3000K / 3500K / 4000K	3000K / 3500K / 4000K	3000K / 3500K / 4000K	3000K / 3500K / 4000K
<b>LUMENS</b>	2300lm / 2500lm / 2800lm	2300lm / 2500lm / 2800lm	2300lm / 2500lm / 2800lm	3300lm / 3600lm / 4000lm	3300lm / 3600lm / 4000lm	3300lm / 3600lm / 4000lm
<b>SIZE</b>	Small	Small	Small	Large	Large	Large
<b>WATTS</b>	35W	35W	35W	50W	50W	50W



IP RATING



DIMMABLE



WARRANTY



MORE INFO

# B Buttons

## Venius V02

### APPLICATION

Commercial / Residential Interior

**BEAM ANGLE** 115°

**COLOUR TEMP** Tri-colour switchable, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Integral

**IP RATING** 20

**MATERIAL** Aluminium frame, plastic diffuser

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### FINISH COLOURS

● Black

● Brushed Coffee

### SMALL



### LARGE



## OPTIONS



CODE	HV3040W-BLK	HV3040W-BBC	HV3050W-BLK	HV3050W-BBC
COLOUR	Black	Brushed Coffee	Black	Brushed Coffee
KELVINS	3000K / 3500K / 4000K	3000K / 3500K / 4000K	3000K / 3500K / 4000K	3000K / 3500K / 4000K
LUMENS	2600lm / 2900lm / 3200lm	2600lm / 2900lm / 3200lm	3300lm / 3700lm / 4000lm	3300lm / 3700lm / 4000lm
SIZE	Small	Small	Large	Large
WATTS	40W	40W	50W	50W

# B Buttons



MORE INFO



IP RATING



DOUBLE INSULATED



WARRANTY

## Buxon Non-sensor

### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 110°

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**MATERIAL** UV resistant ABS  
and polycarbonate (suitable  
for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C  
to 50°C

**SWITCHING CAPACITY** 20,000

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 3 years


### FINISH COLOURS

White



Charcoal



Depth  
64 mm

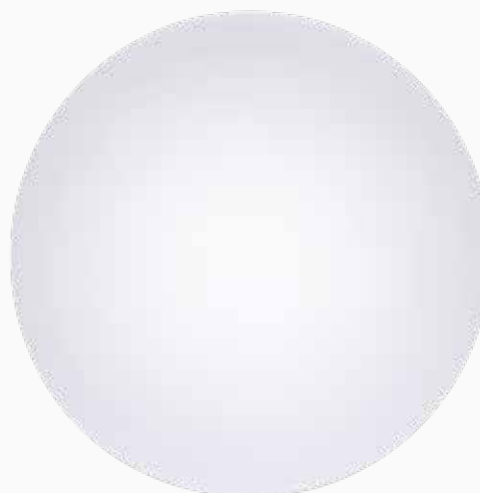

Diameter  
Ø320 mm



### OPTIONS

CODE	LNS3201-WH	LNS3201-CH
COLOUR	White	Charcoal
KELVINS	3000K	3000K
LUMENS	1450lm	1450lm
TYPE	Non-sensor	Non-sensor
WATTS	21W	21W



WARRANTY




SENSOR



IP RATING



DIMMABLE



DOUBLE INSULATED




MORE INFO

# B Buttons

## Buxon Sensor





Depth 64 mm

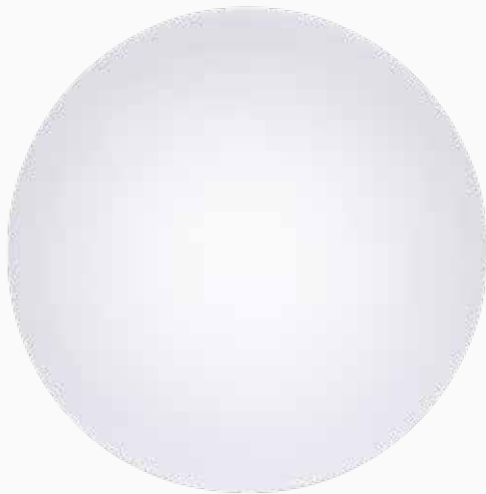

Diameter Ø320 mm

### SENSOR MODEL

Built-in microwave motion sensor. Set time delay and light settings before installation. Maximum install height and detection distance 6m



### OPTIONS

CODE	LSB3201-WH	LSB3201-CH
COLOUR	White	Charcoal
KELVINS	3000K	3000K
LUMENS	1450lm	1450lm
TYPE	Sensor	Sensor
WATTS	21W	21W

### APPLICATION

Commercial / Residential Interior / Exterior

**BEAM ANGLE** 110°

**COLOUR TEMP** Fixed colour, refer kelvins below

**CRI** >80

### SENSOR DETECTION ANGLE

30° to 150°

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Integral

**IK RATING** 08

**IP RATING** 65

**L70** 30,000hrs

**MATERIAL** UV resistant ABS and polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -20°C to 50°C

**SWITCHING CAPACITY** 20,000

**TECH** Integrated SMD LED

**VOLTAGE** 230V


**WARRANTY** 3 years

### FINISH COLOURS

White

Charcoal



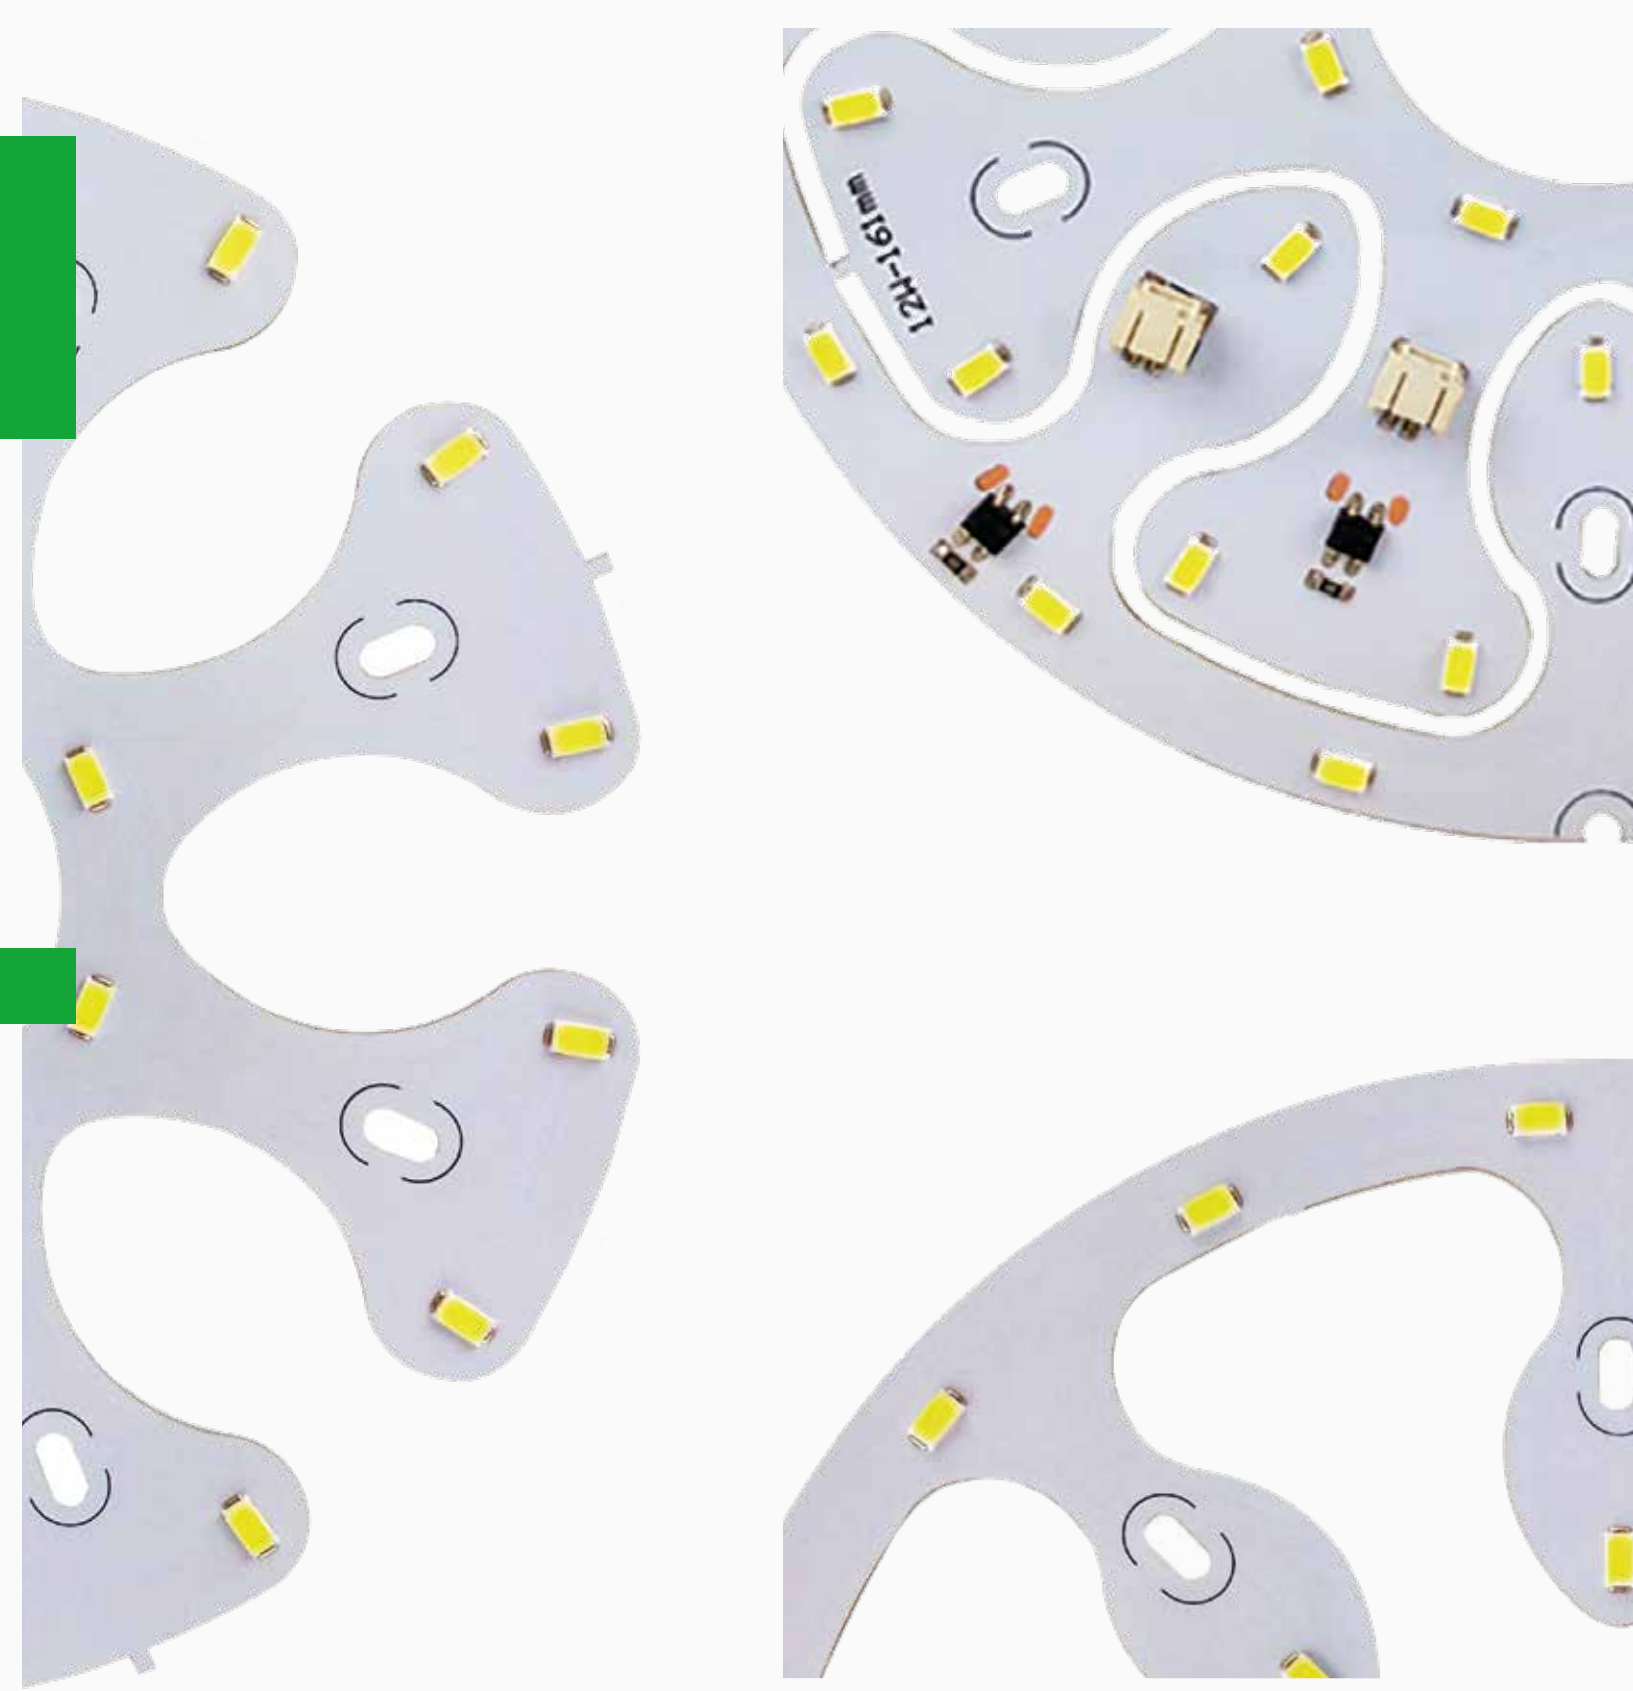

## Featured Components

### Lamp Holders

Page 56



### Drivers

Page 57





# Components


## Luminare Cabling

Page 55



## LED Modules

Page 53



# C components



MORE INFO



DIMMABLE



WARRANTY

## Conversion Module Small

**COLOUR TEMP** Fixed colour, refer kelvins below

**CRI** >80

**DIMMABLE** Yes

**DRIVER** Not required


**TECH** SMD LED

**VOLTAGE** 230

**WARRANTY** 2 years

Convert 230V Halogen, Fluorescent & Incandescent light fittings to LED with a Conversion Module. Sold as complete modules. Complete with cable accessories.

\*No driver required when converting from older technologies

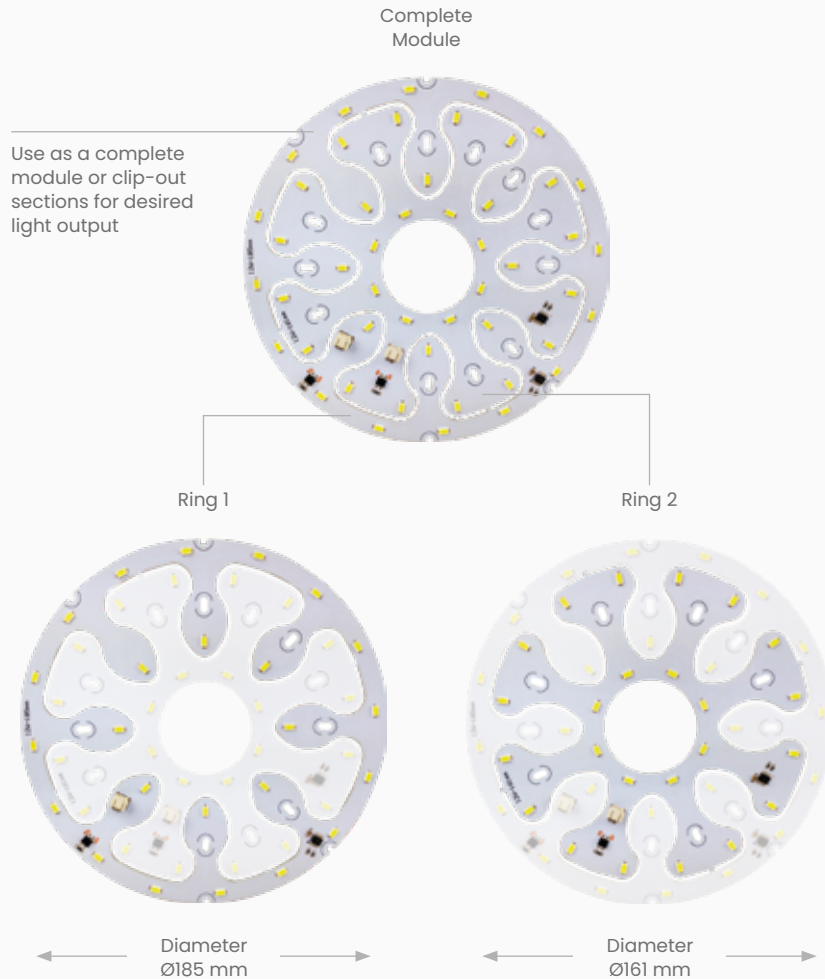

Multiple fixing points for ease of installation

## OPTIONS

CODE	LEDMODULE-S3K	LEDMODULE-S4K
<b>KELVINS</b>	3000K	4000K
<b>LUMENS</b>	Ring 1 = 960lm Ring 2 = 960lm Total = 1920lm	Ring 1 = 1080lm Ring 2 = 1080lm Total = 2160lm
<b>LUMENS P/W</b>	80lm	90lm
<b>SIZE</b>	Small	Small
<b>WATTS</b>	Ring 1 = 12W Ring 2 = 12W Total = 24W	Ring 1 = 12W Ring 2 = 12W Total = 24W



DIMMABLE



WARRANTY



MORE INFO

# C components

## Conversion Module Large

**COLOUR TEMP** Fixed colour, refer kelvins below

**CRI** >80

**DIMMABLE** Yes

**DRIVER** Not required


**TECH** SMD LED

**VOLTAGE** 230

**WARRANTY** 2 years

Convert 230V Halogen, Fluorescent & Incandescent light fittings to LED with a Conversion Module. Sold as complete modules. Complete with cable accessories.

\*No driver required when converting from older technologies

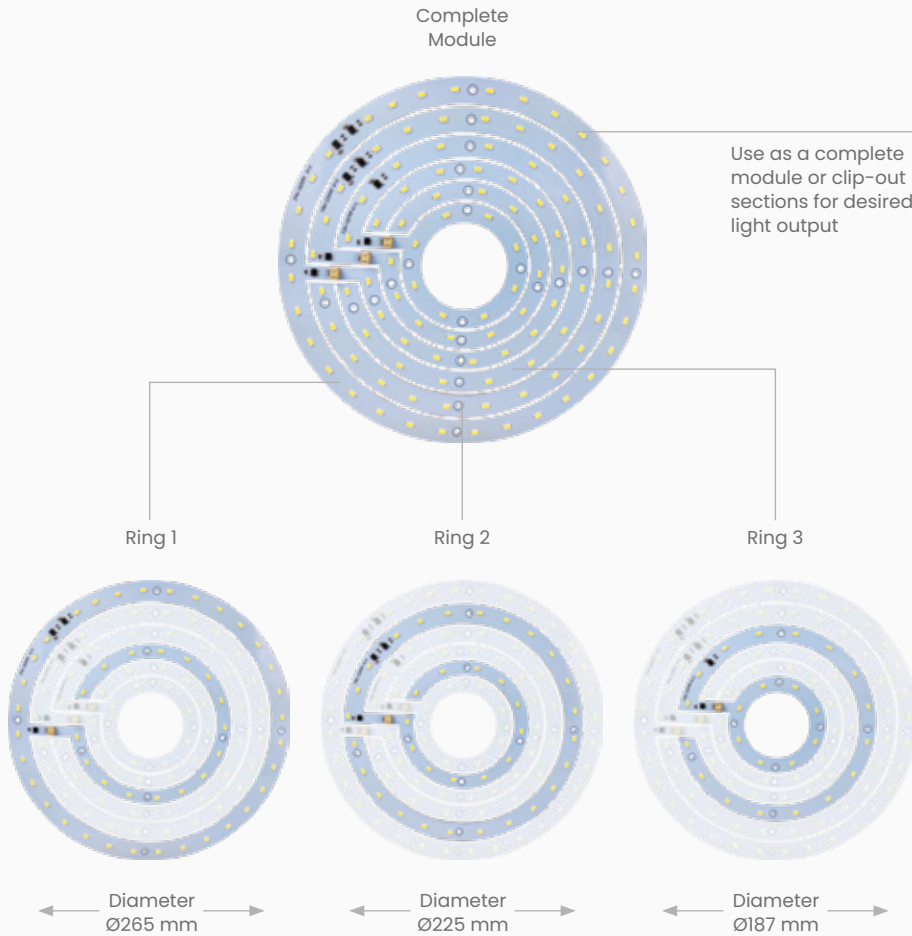

Multiple fixing points for ease of installation

### OPTIONS

CODE	LEDMODULE-L3K	LEDMODULE-L4K
<b>KELVINS</b>	3000K	4000K
<b>LUMENS</b>	Ring 1 = 1920lm Ring 2 = 1440lm Ring 3 = 960lm Total = 4320lm	Ring 1 = 2160lm Ring 2 = 1620lm Ring 3 = 1080lm Total = 4860lm
<b>LUMENS P/W</b>	80lm	90lm
<b>SIZE</b>	Large	Large
<b>WATTS</b>	Ring 1 = 24W Ring 2 = 18W Ring 3 = 12W Total = 54W	Ring 1 = 24W Ring 2 = 18W Ring 3 = 12W Total = 54W

# C

Components



MORE INFO



WARRANTY

## Lighting Cable

**FINISH** Silver strands in a clear sheath cable

**INFORMATION**

230V 0.8mm<sup>2</sup>  
180° Celsius  
18 AWG  
0.75mm<sup>2</sup>

**VOLTAGE** 230V

**WARRANTY** 2 years

2 - CORE



Diameter  
Ø4.6 mm

3 - CORE



Diameter  
Ø5.0 mm

### OPTIONS



CODE	CABLECL2	CABLECL3
LENGTH	Sold per 1M	Sold per 1M
TYPE	2 - Core	3 - Core (2 - Core + Earth)





WARRANTY



MORE INFO

# C Components

## Lamp Holders

VOLTAGE 12V or 230V

WARRANTY 2 years

ROUND - 12V



ROUND - 230V



RECTANGULAR - 12V



### OPTIONS



CODE	LHR500	LHR500B	LHGU1050W	LHGU1050WB	LHQ300	LHQ300B
CABLE LENGTH (MM)	500	500	300	300	300	300
SHAPE	Round	Round	Round	Round	Rectangular	Rectangular
TYPE	GU5.3	GU5.3	GU10	GU10	GU5.3	GU5.3
UNITS	Single	25 Bundle	Single	25 Bundle	Single	25 Bundle
VOLTAGE	12V	12V	230V	230V	12V	12V
WATTS	50W Max	50W Max	50W Max	50W Max	50W Max	50W Max

# C components



MORE INFO



IP RATING



DIMMABLE



WARRANTY

## Smart Downlight Driver

### SIA TGA Range

**DRIVER TYPE** Constant current smart control electronic LED Driver

**DIMMABLE** Yes, refer to compatibility download online

**IP RATING** 20

**MATERIAL** Polycarbonate

**OPERATING TEMP** -20°C to 45°C

**PRI** 200-240V - 47/63Hz

**TECHNOLOGY PLATFORM** Google / Alexa / Tuya

**WARRANTY** 5 years

Suitable with GEOLED downlight range


Google home, Alexa and Tuya compatible



Convert your Downlights to be smart phone enabled

Turn your downlights on/ off dim or change colour all controlled by your voice or mobile

## OPTIONS



CODE	ST10	ST13	ST15
<b>GEOLED RANGE COMPATIBILITY</b>	GEO10	GEO12	GEO15
<b>CLASS</b>	II	II	II
<b>COVERABLE</b>	Yes	Yes	Yes
<b>HEIGHT</b>	29 mm	29 mm	29 mm
<b>LENGTH</b>	125 mm	125 mm	125 mm
<b>WIDTH</b>	45 mm	45 mm	45 mm
<b>OUTPUT CURRENT</b>	220Ma	280Ma	350Ma
<b>OUTPUT VOLTAGE</b>	27-40V	27-40V	27-40V
<b>WATTS</b>	8.8W Max	11.2W Max	14W Max



IP RATING



DIMMABLE



WARRANTY



MORE INFO

# C components

## DAI 2 Downlight Driver SIA BD Range



**DRIVER TYPE** Constant current smart control electronic LED Driver

**DIMMABLE** Yes, refer to compatibility download online

**IP RATING** 20

**MATERIAL** Polycarbonate

**OPERATING TEMP** -20°C to 45°C

**PRI** 200-240V - 47/63Hz

**TECHNOLOGY PLATFORM** DALI 2

**WARRANTY** 5 years

### OPTIONS



CODE	SB10	SB20	SB40
<b>GEOLED RANGE COMPATIBILITY</b>	GEO10	GEO12, GEO20	GEO40
<b>CLASS</b>	II	II	II
<b>COVERABLE</b>	No	No	No
<b>HEIGHT</b>	30 mm	30 mm	31 mm
<b>LENGTH</b>	97 mm	95 mm	123 mm
<b>WIDTH</b>	44 mm	44 mm	79 mm
<b>OUTPUT CURRENT</b>	150-250mA	300-450 Ma	600-1100 Ma
<b>OUTPUT VOLTAGE</b>	3-42V	3-42V	3-42V
<b>WATTS</b>	10.5W Max	18W Max	42W Max

# C components

## GEOLED Downlight Driver Tricolour

**DRIVER TYPE** Constant current smart control electronic LED Driver

**DIMMABLE** Yes, refer to compatibility download online

**IP RATING** 20

**MATERIAL** Polycarbonate

**OPERATING TEMP** -20°C to 45°C

**PRI** 220-240V - 50/60Hz

**WARRANTY** 5 years

Tricolour switchable  
3 / 4 / 6 Kelvins

Compatible with GEOLED  
Tricolour Switchable  
Downlight Range, refer below



MORE INFO



IP RATING



DIMMABLE



WARRANTY



### OPTIONS



CODE	DDT220	DDT280	DDT350
<b>GEOLED RANGE COMPATIBILITY</b>	GEO10	GEO12, GEO12S, GEO12T	GEO15
<b>CLASS</b>	II	II	II
<b>COVERABLE</b>	Yes	Yes	Yes
<b>HEIGHT</b>	29 mm	29 mm	29 mm
<b>LENGTH</b>	125 mm	125 mm	125 mm
<b>WIDTH</b>	45 mm	45 mm	45 mm
<b>OUTPUT CURRENT</b>	220 Ma	280 Ma	350 Ma
<b>OUTPUT VOLTAGE</b>	22-42V	22-42V	22-42V
<b>WATTS</b>	10W	10W	15W



IP RATING



DIMMABLE



WARRANTY



MORE INFO

# C components

## GEOLED Downlight Driver Single Colour



**DRIVER TYPE** Constant current smart control electronic LED Driver

**DIMMABLE** Yes, refer to compatibility download online

**IP RATING** 20

**MATERIAL** Polycarbonate

**OPERATING TEMP** -20°C to 45°C

**PRI** 200-240V - 50/60Hz

**WARRANTY** 5 years

### OPTIONS



CODE	DD280	DD450	DD960
<b>GEOLED RANGE COMPATIBILITY</b>	GEO12 & GEO12S	GEO20	GEO40
<b>CLASS</b>	II	II	II
<b>COVERABLE</b>	Yes	Yes	Yes
<b>HEIGHT</b>	29 mm	30 mm	32 mm
<b>LENGTH</b>	125 mm	130 mm	180 mm
<b>WIDTH</b>	45 mm	45 mm	53 mm
<b>OUTPUT CURRENT</b>	280 mA	450 mA	960 mA
<b>OUTPUT VOLTAGE</b>	22-40V	27-40V	27-40V



# C

## Components



MORE INFO



IP RATING



WARRANTY

## Batten Driver

### Dylan

**DRIVER TYPE** Constant current smart control electronic LED Driver

**DIMMABLE** No

**IP RATING** 20

**MATERIAL** Polycarbonate

**OPERATING TEMP** -20°C to 45°C

**PRI** 200-240V - 40/60Hz

**WARRANTY** 5 years

Suitable with Dylan Batten Range



## OPTIONS



CODE	DYLAND40	DYLAND60
<b>DYLAN RANGE COMPATIBILITY</b>	DYLAN 4FT	DYLAN 5FT
<b>CLASS</b>	II	II
<b>COVERABLE</b>	Yes	Yes
<b>HEIGHT</b>	41mm	45mm
<b>LENGTH</b>	114.5mm	135mm
<b>WIDTH</b>	28mm	29mm
<b>RATED OUTPUT CURRENT</b>	0.95-1A	1.21-1.45A
<b>OUTPUT VOLTAGE</b>	27-40V	30-42V
<b>WATTS</b>	40W Max	58.8W Max



IP RATING



DIMMABLE



WARRANTY



MORE INFO

# C components

## Batten Dimmable Driver Karlin



**DRIVER TYPE** Constant current smart control electronic LED Driver

**DIMMABLE** Yes, refer to compatibility download online

**IP RATING** 20

**MATERIAL** Polycarbonate

**OPERATING TEMP** -20°C to 45°C

**PRI** 200-240V - 50/60Hz

**WARRANTY** 5 years

This driver is suitable for the 5FT Karlin Batten only

### OPTIONS



<b>CODE</b>	KARLIND
<b>KARLIN RANGE COMPATIBILITY</b>	KARLIN 5FT
<b>CLASS</b>	II
<b>COVERABLE</b>	Yes
<b>HEIGHT</b>	3.2 mm
<b>LENGTH</b>	17.7 mm
<b>WIDTH</b>	5.3 mm
<b>OUTPUT CURRENT</b>	1200 mA
<b>OUTPUT VOLTAGE</b>	27-40V
<b>WATTS</b>	48W Max

# C components



MORE INFO



WARRANTY

## Wireless Remote Controller

### CTA Downlight

**MATERIAL** Polycarbonate

Suitable with GEOCTA downlight (control up to 40 downlights Max)

10 downlights on each switch

Control colour temperature from 3K - 6K

Dim lights wireless

Night light function, suitable for security & children's room

Takes 2 x AAA batteries



### OPTIONS

CODE	CTAREMOTE
COLOUR	White
HEIGHT	10.2 mm
DEPTH	1.5 mm
WIDTH	5.2 mm



WARRANTY



MORE INFO

# C components

## Remote Controller LED Floodlight



**MATERIAL** Polycarbonate

Suitable with LED Floodlight

Modes:

- on/off
- day & night operation mode
- night operation mode
- all night mode

Time:

- S: Seconds
- M: Minutes
- H: Hours

Example:

when 30S button pushed  
30secs the lamp will turn off

when 2M button pushed 2  
mins, the lamp will turn off

Sensitivity:

- Detection range upto 8 metres



### OPTIONS

<b>CODE</b>	FLOODREMOTE
<b>FLOODLIGHT SENSOR RANGE COMPATIBILITY</b>	ECONLED 10W, 20W, 30W PIR & Microwave
<b>COLOUR</b>	Black
<b>HEIGHT</b>	90 mm
<b>DEPTH</b>	5 mm
<b>WIDTH</b>	40 mm

# C components



MORE INFO



DIMMABLE



WARRANTY

## Minnie Driver 650mA LED

**DIMMABLE** Yes, refer to compatibility download online

**OPERATING TEMP** -20°C to 50°C

**POWER FACTOR** >0.90

**PRI** 220-240V - 50/60Hz

**WARRANTY** 2 years

Compatible with Minnie A01 Recessed Downlight



Includes junction box, will run 2-6 Minnie A01 3Ws Downlights, refer page 90



### OPTIONS



CODE	MINID
<b>HEIGHT</b>	29 mm
<b>LENGTH</b>	125 mm
<b>WIDTH</b>	45 mm
<b>WATTS</b>	18W Max





IP RATING



WARRANTY



MORE INFO

# C components

TH13



TH14



## Pineapple Wire-Wound Transformer

**DIMMABLE** Yes, with compatible dimmer

**IP RATING** 67

**POWER FACTOR** >0.9

**TECH** Suitable for use with 12V AC LED or halogen lamps

**VOLTAGE** 12V AC

**WARRANTY** 2 years

**IMPORTANT** If mounting TH series transformers inground DO NOT install with soil packed around the transformer. Best installed in a water meter box. We recommend to complete a flood test on the box - the water should drain away within 30 mins. If it does not, create adequate free-flowing drainage. Not suitable for use in any situation with persistent submersion.

### OPTIONS



CODE	TH13-50VA	TH13-100VA	TH13-150VA	TH14-200VA	TH14-300VA	TH14-400VA
MODEL	TH13	TH13	TH13	TH14	TH14	TH14
WATTS	50VA Max	100VA Max	150VA Max	200VA Max	300VA Max	400VA Max

# C Components



MORE INFO



IP RATING




WARRANTY

## Driver Constant Voltage 12V DC

IP RATING 66

VOLTAGE 12V DC  
constant voltage

WARRANTY 2 years

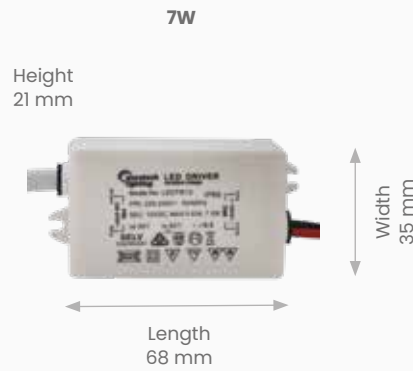

### OPTIONS



CODE	LED7W12	LED12W12V	LED30W12	LED60W12
INFORMATION	200mm Double-insulated 230V cables, 200mm Secondary 12V cables	1.5m 230V input cable with 3-pin plug	2.0m 230V cable with 3-pin plug, 1.0m 12V cable	2.0m 230V cable with 3-pin plug, 1.0m 12V cable
TYPE	7W	12W	30W	60W
WATTS	7.5W Max	12W Max	30W Max	60W Max



IP RATING



WARRANTY



MORE INFO



# C Components

## Driver Constant Voltage 24V DC

IP RATING 66

VOLTAGE 24V DC  
constant voltage

WARRANTY 2 years

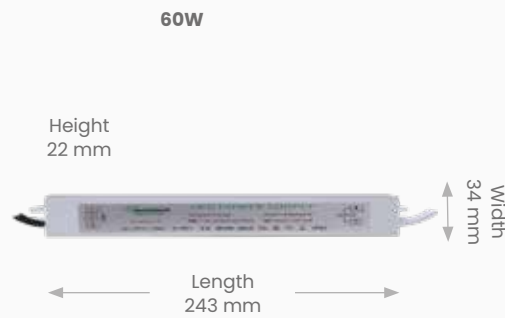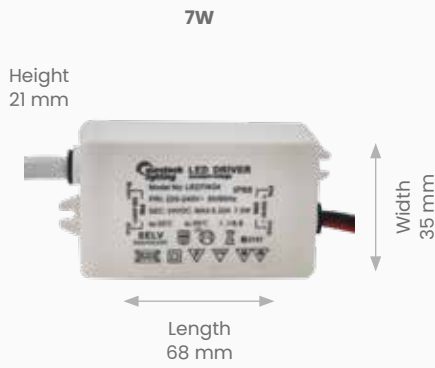

### OPTIONS



CODE	LED7W24	LED12W24V	LED30W24	LED60W24
INFORMATION	200mm Double-insulated 230V cables, 200mm Secondary 24V cables	1.5m 230V input cable with 3-pin plug	2.0m 230V cable with 3-pin plug, 1.0m 24V cable	2.0m 230V cable with 3-pin plug, 1.0m 24V cable
TYPE	7W	12W	30W	60W
WATTS	7.5W Max	12W Max	30W Max	60W Max

# C components



MORE INFO



DIMMABLE\*



WARRANTY

## Electronic Halogen & Retrofit LED Transformer

### APPLICATION

Residential  
Exterior


\***DIMMABLE** Halogen dimmable only, refer to compatibility download online

**POWER FACTOR** >0.9

**VOLTAGE** 12V AC

**WARRANTY** 2 years

Ideal for converting halogen downlights to LEDs.

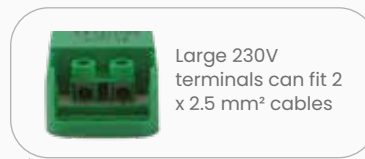

Large 230V terminals can fit 2 x 2.5 mm<sup>2</sup> cables

Depth  
45 mm



Large 12V terminals at opposite end

Height  
29 mm

Width  
114 mm

### OPTIONS



**CODE**

LED70W12

**WATTS (MAX)**

3-20W LED retrofit lamp loads  
0-70W Halogen lamp loads

**2**  
YEAR

WARRANTY



MORE INFO

# C

Components

## Constant Current Driver 350mA LED

**DIMMABLE** No

**POWER FACTOR** >0.5

**PRI** 220–240V - 50/60Hz

**SEC** 16VDC Max. 0.35A 4W

**TA** -20°C > 75°C

**VOLTAGE** 350mA

**WARRANTY** 2 years



### OPTIONS



**CODE** LED350MA4W

**WATTS** 4W Max





## Featured Downlights

**GEO 20/40**

Refer page 74



**GEOLG 20/40**

Page 87





# Downlights

## Aurora

Page 73



# D Downlights



MORE INFO



IP RATING



DIMMABLE



CLASS 3



WARRANTY

## Aurora Tiltable

### APPLICATION

Commercial  
Interior

**BEAM ANGLE** 90°

**CLASS** 3

**CRI** >80

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable

**IP RATING** 20

**L70** 54,000hrs

**MATERIAL** Corrosion resistant  
A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**TILT ANGLE** 60°

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS

**CODE** SHOPDL40W4K-WH

**COLOUR** White

**KELVINS** 4000K / 5000K / 6500K

**LUMENS** 4400lm / 5200lm / 4600lm

**WATTS** 40W



IP RATING



DIMMABLE



CLASS 3




WARRANTY



MORE INFO

# D Downlights

## GeoLED GEO40 Fixed CRI80

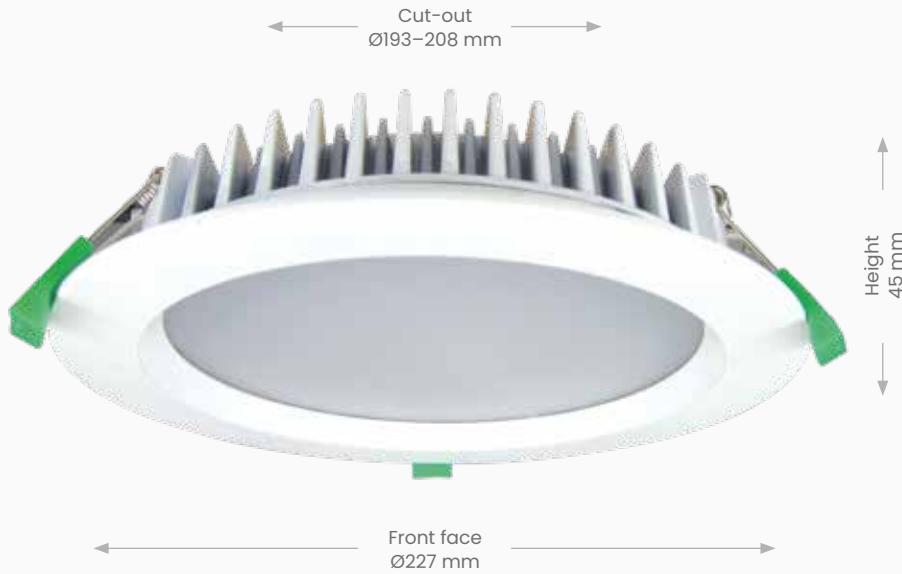

**APPLICATION**

Commercial / Interior / Exterior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Fixed colour, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Replaceable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium, corrosion resistant A6063 alloy

**MOUNT** Recessed

**POWER FACTOR** >0.9

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS

**CODE** ICDLR40W4K-WH

**COLOUR** White

**KELVINS** 4000K

**LUMENS** 4000lm

**WATTS** 40W

# D Downlights



MORE INFO



IP RATING



DIMMABLE



CLASS 3



WARRANTY

## GeoLED GEO20 CRI80

### APPLICATION

Commercial  
Interior / Exterior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable  
& coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium,  
corrosion resistant A6063 alloy


**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

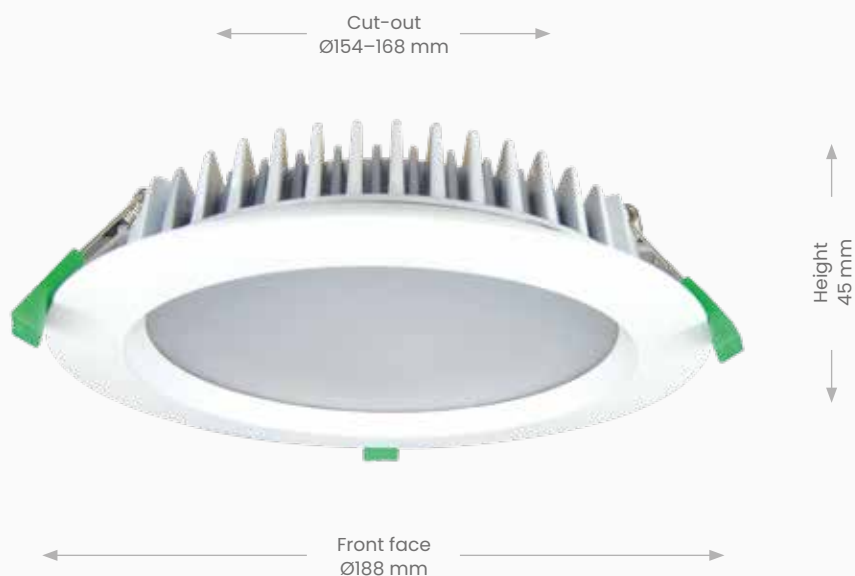

### OPTIONS



CODE	ICDLR20W3K-WH	ICDLR20W4K-WH
COLOUR	White	White
KELVINS	3000K	4000K
LUMENS	1877lm	2014lm
WATTS	20W	20W





IP RATING



DIMMABLE



CLASS 3



WARRANTY



MORE INFO

# D Downlights

## GeoLED GEO15R Retrofit



### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 90°

**CLASS 3**

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable  
& coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium,  
corrosion resistant A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**RETROFIT MODEL** Easily  
upgrade older downlights

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### OPTIONS



CODE	ICDLR16015WCCT-WH	ICDLR16015WCCT-BCH	ICDLR15R90-WH	ICDLR15R90-BCH
<b>COLOUR</b>	White	Brushed Chrome*	White	Brushed Chrome*
<b>CRI</b>	>80	>80	>90	>90
<b>KELVINS</b>	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
<b>LUMENS</b>	1200lm / 1300lm / 1250lm	1200lm / 1300lm / 1250lm	1020lm / 1105lm / 1060lm	1020lm / 1105lm / 1060lm
<b>WATTS</b>	15.3W	15.3W	15.3W	15.3W

\*Not suitable for exterior.

\*Not suitable for exterior.

# D Downlights



MORE INFO



IP RATING



DIMMABLE



CLASS 3



WARRANTY

## GeoLED GEO12R Retrofit

### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable  
& coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium,  
corrosion resistant A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**RETROFIT MODEL** Easily  
upgrade older downlights

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS



CODE	ICDLR12512WCCT-WH	ICDLR12512WCCT-BCH	ICDLR12R90-WH	ICDLR12R90-BCH
<b>COLOUR</b>	White	Brushed Chrome*	White	Brushed Chrome*
<b>CRI</b>	>80	>80	>90	>90
<b>KELVINS</b>	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
<b>LUMENS</b>	1020lm / 1060lm / 1040lm	1020lm / 1060lm / 1040lm	870lm / 900lm / 885lm	870lm / 900lm / 885lm
<b>WATTS</b>	12W	12W	12W	12W

\*Not suitable for exterior.

\*Not suitable for exterior.



IP RATING



DIMMABLE



CLASS 3





WARRANTY



MORE INFO

# D Downlights

## GeoLED GEOCTA Wireless Remote Controlled

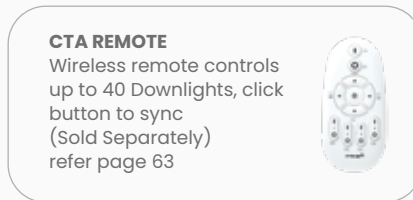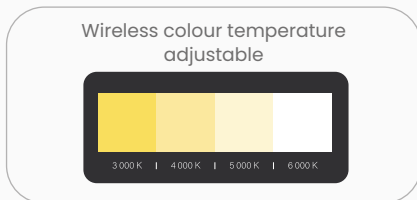

### APPLICATION

Commercial / Residential Interior / Exterior

**BEAM ANGLE** 90°

**CLASS 3**

**COLOUR TEMP** Adjust colour temperature from your wireless remote (sold separately)

**CRI** >80

**DIMMABLE** Yes, with wireless remote control only (sold separately)

**DRIVER** Replaceable & coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium, corrosion resistant A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

**FUNCTIONS** Colour temperature adjustable between 3-6K

Dim lights

Night light function, perfect for security or children's bedroom

### OPTIONS



CODE	ICDLR12WCTA-WH	CTAREMOTE
COLOUR	White	White
KELVINS	3000K-6500K	-
LUMENS	980lm @ 3000K	-
SIZE	Small	-
WATTS	12W / 15W	-

# D Downlights



MORE INFO



IP RATING



DIMMABLE



CLASS 3



WARRANTY

## GeoLED GEO12 CRI90

### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >90

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable  
& coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium,  
corrosion resistant A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS



CODE	ICDLR1290-WH	ICDLR1290-BLK	ICDLR1290-SL	ICDLR1290-BCH
COLOUR	White	Black	Silver	Brushed Chrome*
KELVINS	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
LUMENS	870lm / 900lm / 885lm	870lm / 900lm / 885lm	870lm / 900lm / 885lm	870lm / 900lm / 885lm
WATTS	12W	12W	12W	12W

\*Not suitable for exterior.



IP RATING



DIMMABLE



CLASS 3



WARRANTY



MORE INFO

# D Downlights

## GeoLED GEO12 CRI80



### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Fixed colour & tri-colour switchable options available, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Replaceable & coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium, corrosion resistant A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### OPTIONS



CODE	ICDLR12W3K-WH	ICDLR12W4K-WH	ICDLR12WCCT-WH	ICDLR12WCCT-BLK	ICDLR12WCCT-SL	ICDLR12WCCT-BCH
<b>COLOUR</b>	White	White	White	Black	Silver	Brushed Chrome*
<b>KELVINS</b>	3000K	4000K	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
<b>LUMENS</b>	1020lm	1040lm	1020lm / 1060lm / 1040lm	1020lm / 1060lm / 1040lm	1020lm / 1060lm / 1040lm	1020lm / 1060lm / 1040lm
<b>WATTS</b>	12W	12W	12W	12W	12W	12W

\*Not suitable for exterior.

# D Downlights



MORE INFO



IP RATING



DIMMABLE



CLASS 3



WARRANTY

## GeoLED GEO10 CRI90

### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >90

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable  
& coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium,  
corrosion resistant A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS



CODE	ICDLR1090-WH	ICDLR1090-SL	ICDLR1090-BLK	ICDLR1090-BCH
COLOUR	White	Silver	Black	Brushed Chrome*
KELVINS	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
LUMENS	630lm / 660lm / 640lm	630lm / 660lm / 640lm	630lm / 660lm / 640lm	630lm / 660lm / 640lm
WATTS	9.8W	9.8W	9.8W	9.8W

\*Not suitable for exterior.





IP RATING



DIMMABLE



CLASS 3



WARRANTY



MORE INFO

# D Downlights

## GeoLED GEO10 CRI80

### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Fixed colour & tri-colour switchable options available, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Replaceable & coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium, corrosion resistant A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS



CODE	ICDLR10W3K-WH	ICDLR10W4K-WH	ICDLR10WCCT-WH	ICDLR10WCCT-SL	ICDLR10WCCT-BLK	ICDLR10WCCT-BCH
<b>COLOUR</b>	White	White	White	Silver	Black	Brushed Chrome*
<b>KELVINS</b>	3000K*	4000K*	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
<b>LUMENS</b>	740lm	760lm	736lm / 776lm / 756lm	736lm / 776lm / 756lm	736lm / 776lm / 756lm	736lm / 776lm / 756lm
<b>WATTS</b>	10W	10W	9.8W	9.8W	9.8W	9.8W

\*DALI dimming upgrade available for 4K and 3K models.

\*Not suitable for exterior.

# D Downlights



MORE INFO



IP RATING



DIMMABLE



CLASS 3



WARRANTY

## GeoLED GEOT Tiltable CRI90

### APPLICATION

Commercial / Residential  
Interior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >90

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable  
& coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium,  
corrosion resistant A6063 alloy

**MOUNT** Recessed


**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**TILT ANGLE** 30°

**VOLTAGE** 230V

**WARRANTY** 5 years

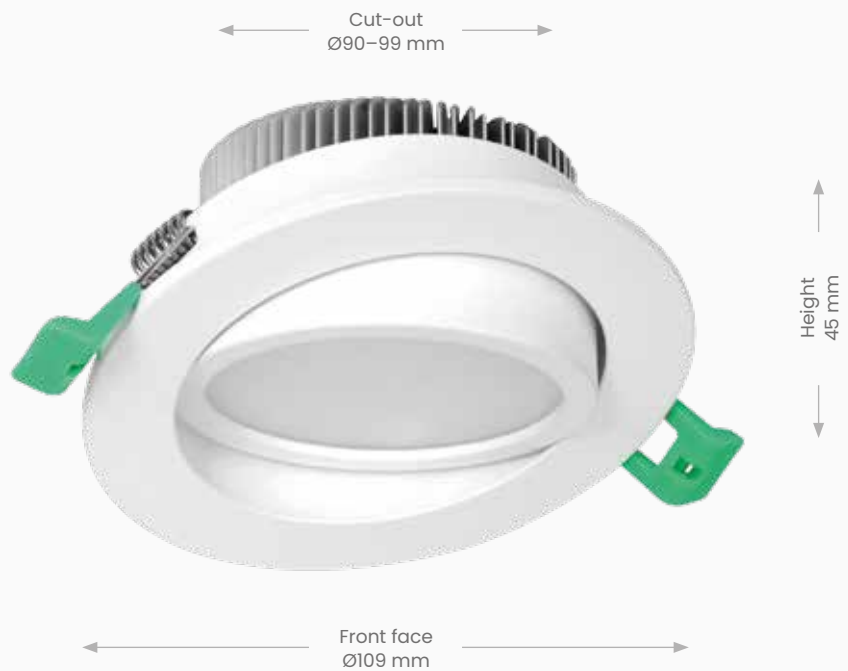

### OPTIONS



CODE	ICDLT1390-WH	ICDLT1390-BLK	ICDLT1390-BCH
<b>COLOUR</b>	White	Black	Brushed Chrome*
<b>KELVINS</b>	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
<b>LUMENS</b>	830lm / 865lm / 850lm	830lm / 865lm / 850lm	830lm / 865lm / 850lm
<b>WATTS</b>	13W	13W	13W

\*Not suitable for exterior.



IP RATING



DIMMABLE



CLASS 3




WARRANTY



MORE INFO

# D Downlights

## GeoLED GEOT Tiltable CRI80

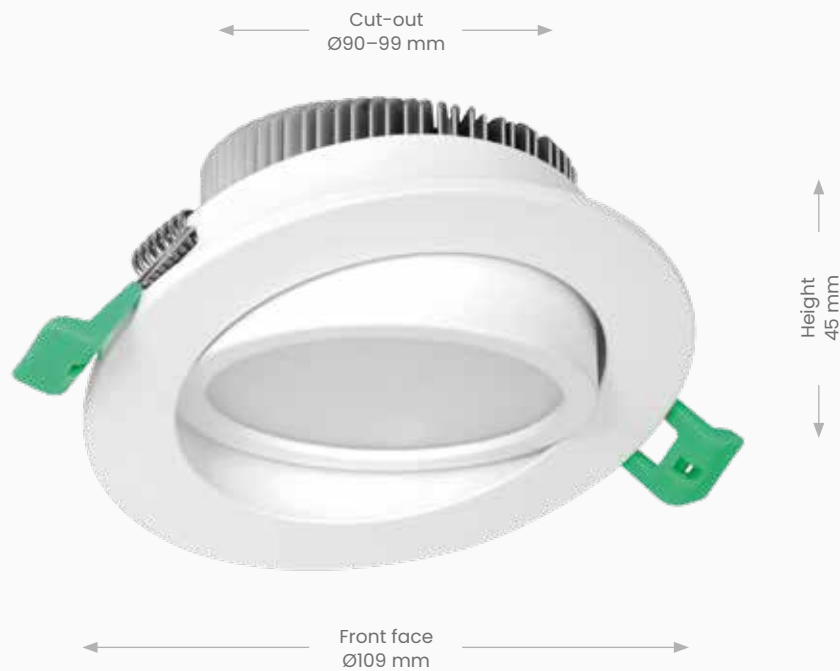

**APPLICATION**

Commercial / Residential Interior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Tri-colour switchable, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Replaceable & coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium, corrosion resistant A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**TILT ANGLE** 30°

**VOLTAGE** 230V

**WARRANTY** 5 years

### OPTIONS



CODE	ICDLT13WCCT-WH	ICDLT13WCCT-BLK	ICDLT13WCCT-BCH
COLOUR	White	Black	Brushed Chrome*
KELVINS	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
LUMENS	980lm / 1020lm / 1000lm	980lm / 1020lm / 1000lm	980lm / 1020lm / 1000lm
WATTS	13W	13W	13W

\*Not suitable for exterior.

# D Downlights



MORE INFO



IP RATING



DIMMABLE



CLASS 3



WARRANTY

## GeoLED GEO12S Square CRI90

### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >90

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable  
& coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium,  
corrosion resistant A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS



CODE	ICDLS1290-WH	ICDLS1290-BLK	ICDLS1290-SL	ICDLS1290-BCH
COLOUR	White	Black	Silver	Brushed Chrome*
KELVINS	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
LUMENS	865lm / 900lm / 885lm	865lm / 900lm / 885lm	865lm / 900lm / 885lm	865lm / 900lm / 885lm
WATTS	12.2W	12.2W	12.2W	12.2W

\*Not suitable for exterior.



IP RATING



DIMMABLE



CLASS 3



WARRANTY



MORE INFO

# D Downlights

## GeoLED GEO12S Square CRI80



### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 90°

**CLASS** 3

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable  
& coverable

**IP RATING** 44

**L70** 54,000hrs

**MATERIAL** Aluminium,  
corrosion resistant A6063 alloy

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years

### OPTIONS



CODE	ICDLS12WCCT-WH	ICDLS12WCCT-BLK	ICDLS12WCCT-SL	ICDLS12WCCT-BCH
<b>COLOUR</b>	White	Black	Silver	Brushed Chrome*
<b>KELVINS</b>	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
<b>LUMENS</b>	1020lm / 1060lm / 1040lm	1020lm / 1060lm / 1040lm	1020lm / 1060lm / 1040lm	1020lm / 1060lm / 1040lm
<b>WATTS</b>	12.2W	12.2W	12.2W	12.2W

\*Not suitable for exterior.

# D Downlights

## GeoLED GEOLG Low Glare

### APPLICATION

Commercial  
Interior

**BEAM ANGLE** 75°

**CLASS** 3

**CRI** >80

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable  
& coverable

**IP RATING** 44

**L70** 54,000hrs

**LOW GLARE** Deep recess lens,  
reduces unwanted glare

**MATERIAL** Aluminium with  
black chrome reflector

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 3 years



MORE INFO



IP RATING



DIMMABLE



CLASS 3



WARRANTY



### OPTIONS

CODE	LGDL20W4K-WH	LGDL40W4K-WH
COLOUR	White with black chrome reflector	White with black chrome reflector
KELVINS	4000K	4000K
LUMENS	1800lm	3600lm
WATTS	20W	40W





IP RATING



DIMMABLE



CLASS 3



WARRANTY



MORE INFO

# D Downlights

## GeoLED GEOLG Low Glare

### APPLICATION

Commercial / Residential  
Interior / Exterior

**BEAM ANGLE** 80°

**CLASS** 3

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**DIMMABLE** Yes, refer  
compatibility download online

**DRIVER** Replaceable  
& coverable

**IP RATING** 44

**L70** 54,000hrs

**LOW GLARE** Deep recess lens,  
reduces unwanted glare

**MATERIAL** Aluminium

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS

CODE	LGDL12WCCT-WH	LGDL15WCCT-WH
COLOUR	White	White
CRI	>80	>80
KELVINS	3000K / 4000K / 6500K	3000K / 4000K / 6500K
LUMENS	816lm / 900lm / 840lm	1050lm / 1200lm / 1125lm
WATTS	12W	15W

# D Downlights



MORE INFO



IP RATING



DIMMABLE



CLASS 3



WARRANTY

## Allure A502 Pinhole

### APPLICATION

Commercial / Residential Interior

**BEAM ANGLE** 30°

**CLASS** 3

**COLOUR TEMP** Tri-colour switchable, refer kelvins below

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Replaceable & coverable

**IP RATING** 20

**L70** 54,000hrs

**MATERIAL** Aluminium

**MOUNT** Recessed

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS



CODE	PHDL10WCCT-WH	PHDL10WCCT-BLK	PHDL1090-WH	PHDL1090-BLK
<b>COLOUR</b>	White	Black	White	Black
<b>CRI</b>	>80	>80	>90	>90
<b>KELVINS</b>	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K
<b>LUMENS</b>	600lm / 680lm / 630lm	600lm / 680lm / 630lm	510lm / 575lm / 535lm	510lm / 575lm / 535lm
<b>WATTS</b>	10W	10W	10W	10W



IP RATING



DIMMABLE



CLASS 3



WARRANTY



MORE INFO

# D Downlights

## Eminence Fixed Surface Mount

**APPLICATION**

Residential Interior

**BEAM ANGLE** 24°

**CLASS** 3

**CRI** >80

**DIMMABLE** Yes, refer compatibility download online

**DRIVER** Built-in

**IP RATING** 20

**L70** 54,000hrs

**MATERIAL** Aluminium

**MOUNT** Surface

**RATING** IC-F / IC-4

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 3 years

SMALL



LARGE



### OPTIONS



CODE	SMDL7W3K-WH	SMDL7W3K-BLK	SMDL12W3K-WH	SMDL12W3K-BLK
COLOUR	White	Black	White	Black
KELVINS	3000K	3000K	3000K	3000K
LUMENS	490lm	490lm	840lm	840lm
SIZE	Small	Small	Large	Large
WATTS	7W	7W	12W	12W

# D Downlights



MORE INFO



DIMMABLE



IP RATING



WARRANTY

## Minnie Recessed Downlight/ Cabinet Light

### APPLICATION

Commercial / Residential Interior

**BEAM ANGLE** 45°

**CABLE** 1m

**CRI** >90

**DRIVER** Separate 650mA driver required, refer page 65

**IP RATING** 20

**MATERIAL** Aluminium

**MOUNT** Recessed

**PACK** Sold in packs of 2

**TECH** Integrated LED

**VOLTAGE** 12V DC

**WARRANTY** 2 years



### OPTIONS



CODE	MINI3W-WH	MINI3W-BLK
COLOUR	White	Black
KELVINS	3000K	3000K
LUMENS	160lm	160lm
WATTS	3W	3W



IP RATING




WARRANTY




MORE INFO

**RECESSED**

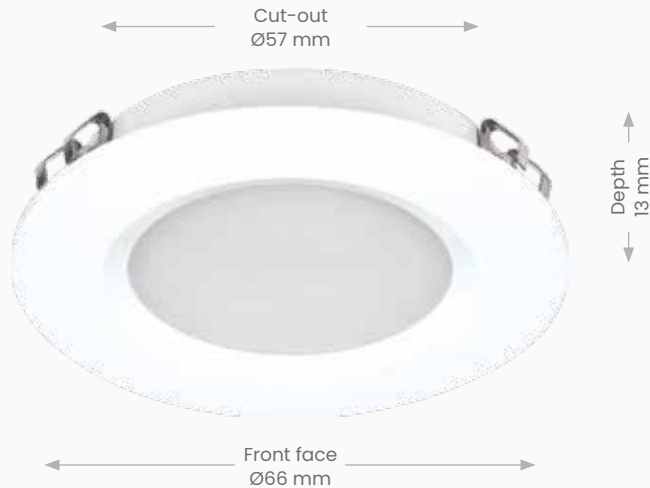

**SURFACE MOUNT**

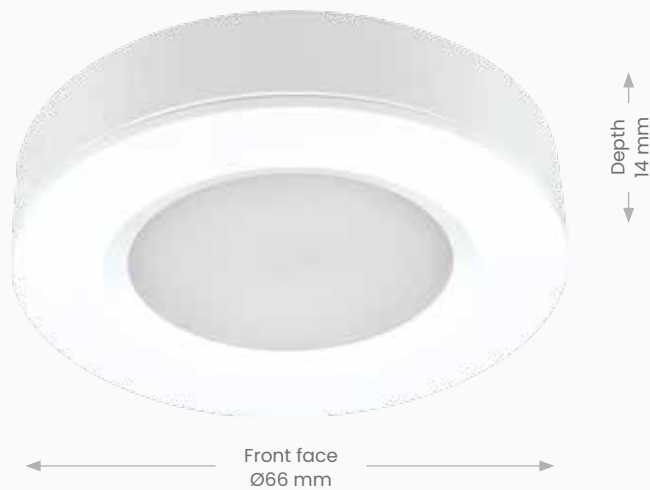

**OPTIONS**

<b>CODE</b>	<b>SLED3W</b>
<b>COLOUR</b>	White
<b>KELVINS</b>	3000K / 4000K / 6500K
<b>LUMENS</b>	120lm/ 200lm/ 148lm
<b>WATTS</b>	3W

# D Downlights

## Minnie Dual Mount Surface or Recessed Downlight/ Cabinet Light

**APPLICATION**

Residential  
Interior

**BEAM ANGLE** 120°

**CABLE** 1m

**CRI** >90

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**DRIVER** Separate 12V DC driver  
required, refer page 67

**IP RATING** 20

**MATERIAL** Aluminium

**MOUNT** Recessed or surface  
(remove surface mount ring  
for recessed)

**TECH** Integrated LED

**VOLTAGE** 12V DC

**WARRANTY** 2 years

Perfect for cabinets or low  
voltage tiny homes



## Featured Floodlights Family

### Non-Sensor

Page 99



### Microwave or PIR Sensor

Page 97







# Floodlights

# F

# Floodlights



MORE INFO



IP RATING



WARRANTY

## EconLED Light Commercial Flood Non-sensor

### APPLICATION

Light Commercial\*  
Exterior

**BEAM ANGLE** 120°

**CRI** >70

**DRIVER** Integral

**IP RATING** 65

**IK RATING** 07

**L70** 30,000hrs

**MATERIAL** Powder coated  
aluminium body and clear  
glass diffuser

**MOUNT** Surface

**POWER FACTOR** >0.9

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 2 years

\*Max daily operation 12 hours

LARGE



X-LARGE



### OPTIONS



CODE	LEDFLOOD150W4K-BLK	LEDFLOOD200W4K-BLK
COLOUR	Black	Black
KELVINS	4000K	4000K
LUMENS	11500lm	15000lm
SIZE	Large	X-Large
WATTS	150W	200W



IP RATING



WARRANTY



MORE INFO

SMALL



MEDIUM



### OPTIONS

CODE	LEDFLOOD50W4K-BLK	LEDFLOOD100W4K-BLK
COLOUR	Black	Black
KELVINS	4000K	4000K
LUMENS	3600lm	7500lm
SIZE	Small	Medium
WATTS	50W	100W

# F Floodlights

## EconLED Light Commercial Flood Non-sensor

**APPLICATION**  
Light Commercial\*  
Exterior

**BEAM ANGLE** 120°

**CRI** >70

**DRIVER** Integral

**IP RATING** 65

**IK RATING** 07

**L70** 30,000hrs

**MATERIAL** Powder coated aluminium body and clear glass diffuser

**MOUNT** Surface

**POWER FACTOR** >0.9

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 2 years

\*Max daily operation 12 hours.

# Floodlights

## EconLED Domestic Flood Sensor-A02

**APPLICATION**  
Commercial / Residential  
Exterior

**BEAM ANGLE** 110°

**CRI** >75

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 65

**IK RATING** 07

**L70** 40,000hrs

**MATERIAL** Powder coated aluminium body and clear glass diffuser

**MOUNT** Surface

**POWER FACTOR** >0.9

**SENSOR**

**BUILT-IN** PIR sensor

**DETECTION DISTANCE** 1-8m

**TIME** 30sec-1hr

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years



MORE INFO



SENSOR PIR



IP RATING




WARRANTY

MEDIUM



LARGE

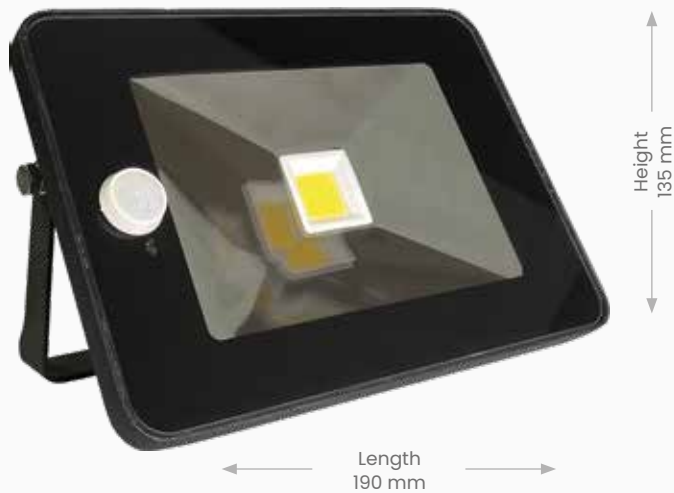

**OPTIONS**

CODE	FLOOD20WPIR	FLOOD30WPIR	FLOODREMOTE
COLOUR	Black	Black	Black
KELVINS	4000K	4000K	-
LUMENS	2000lm	3000lm	-
SIZE	Medium	Large	-
WATTS	20W	30W	-

\* 1 x Remote Control comes with each floodlight bought



SENSOR MICROWAVE



IP RATING



WARRANTY




MORE INFO

# Floodlights

## EconLED Domestic Flood Sensor-A01

SMALL

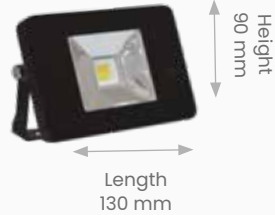

MEDIUM



LARGE



Comes with fitting



Control sensor sensitivity, lux levels and time delay settings of your LED Floodlights with a hand held remote control

**APPLICATION**

Residential Exterior

**BEAM ANGLE** 120°

**CRI** >75

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 65

**IK RATING** 07

**L70** 40,000hrs

**MATERIAL** Powder coated aluminium body and clear glass diffuser

**MOUNT** Surface

**POWER FACTOR** >0.9

**SENSOR**

**BUILT-IN** microwave sensor

**DETECTION DISTANCE** 1-8m


**TIME** 30sec-1hr

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

### OPTIONS



CODE	LEDFLOOD10W4KS-BLK	LEDFLOOD20W4KS-BLK	LEDFLOOD30W4KS-BLK	FLOODREMOTE
COLOUR	Black	Black	Black	Black
KELVINS	4000K	4000K	4000K	-
LUMENS	930lm	2000lm	3000lm	-
SIZE	Small	Medium	Large	-
WATTS	10W	20W	30W	-

\* 1 x Remote Control comes with each floodlight bought

# F

# Floodlights



MORE INFO



IP RATING



WARRANTY

## EconLED Domestic Flood Non-sensor

### APPLICATION

Residential  
Exterior

**BEAM ANGLE** 120°

**CRI** >75

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 65

**IK RATING** 07

**L70** 40,000hrs

**MATERIAL** Powder coated aluminium body and clear glass diffuser

**MOUNT** Surface

**POWER FACTOR** >0.9

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

SMALL



MEDIUM



LARGE



### OPTIONS

CODE	LEDFLOOD10W4K-BLK	LEDFLOOD20W4K-BLK	LEDFLOOD30W4K-BLK
<b>COLOUR</b>	Black	Black	Black
<b>KELVINS</b>	4000K	4000K	4000K
<b>LUMENS</b>	930lm	2000lm	3000lm
<b>SIZE</b>	Small	Medium	Large
<b>WATTS</b>	10W	20W	30W





Image uses EconLED Non - Sensor Floodlight, refer page 96.



## Lamps

### Cob

Page 103



### Linear

Page 106



### MR16

Page 108



### GU10

Page 107





# Lamps



## Decorative

Page 116



## Opal

Page 114



## Filament

Page 109



# Lamps

## LED COB G9

**COLOUR TEMP** Fixed colour, refer kelvins below

**BEAM ANGLE** 360°

**DIMMABLE** Refer chart below


**L70** 25,000hrs

**VOLTAGE** 230

**WARRANTY** 2 years

**2  
YEAR**

**WARRANTY**

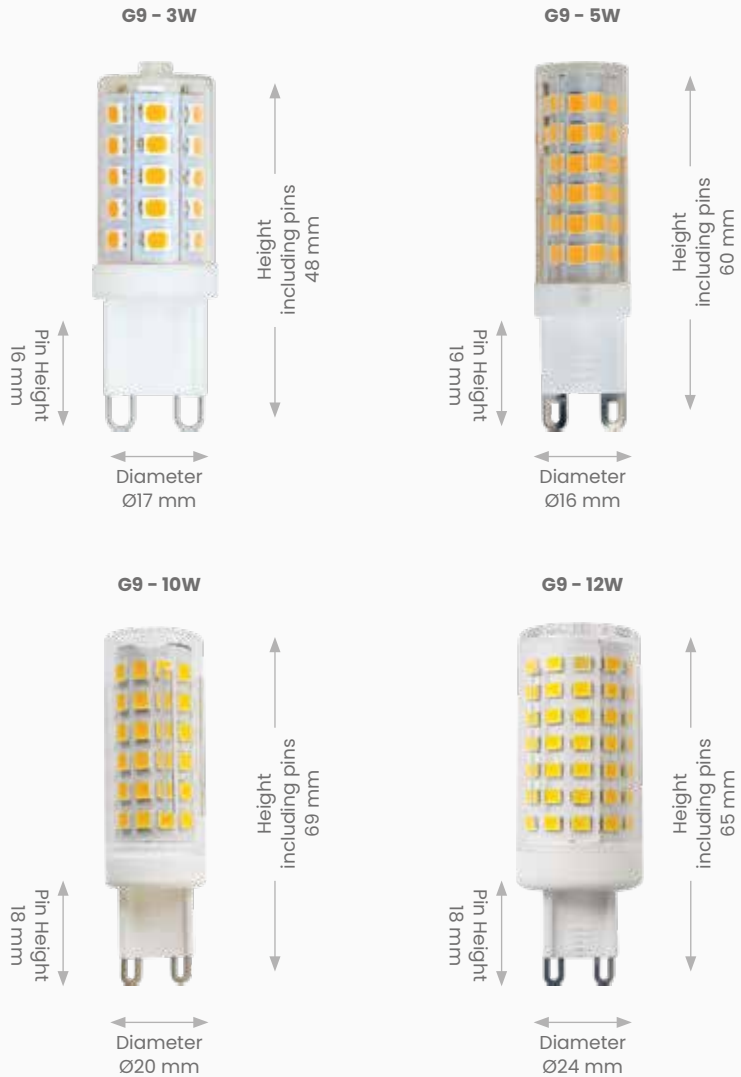

### OPTIONS




CODE	LEDSMDG93W	LEDSMDG95W	LEDSMDG910W	LEDSMDG912W
<b>TYPE</b>	G9 - 3W	G9 - 5W	G9 - 10W	G9 - 12W
<b>BASE</b>	G9	G9	G9	G9
<b>DIMMABLE</b>	Yes	Yes	No	No
<b>KELVINS</b>	3000K	3000K	3000K	3000K
<b>LUMENS</b>	300lm	550lm	1000lm	1200lm
<b>WATTS</b>	3W	5W	10W	12W



WARRANTY

E14 - 5W

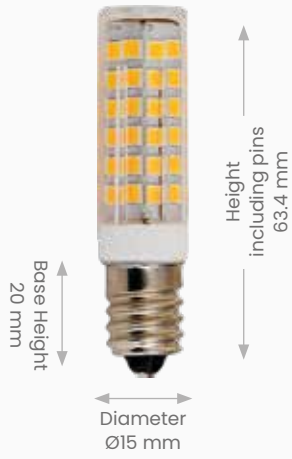

E14 - 10W



E14 - 12W



### OPTIONS

CODE	LEDSMDE145W	LEDSMDE1410W	LEDSMDE1412W
TYPE	E14 - 5W	E14 - 10W	E14 - 12W
BASE	E14	E14	E14
DIMMABLE	Yes	No	No
KELVINS	3000K	3000K	3000K
LUMENS	550lm	1000lm	1200lm
WATTS	5W	10W	12W

# Lamps

## LED COB E14

**COLOUR TEMP** Fixed colour, refer kelvins below

**BEAM ANGLE** 360°

**DIMMABLE** Refer chart below

**L70** 25,000hrs

**VOLTAGE** 230

**WARRANTY** 2 years

# Lamps

## LED COB G4 / GY

**COLOUR TEMP** Fixed colour, refer kelvins below

**BEAM ANGLE** 360°

**DIMMABLE** No

**L70** 25,000hrs

**VOLTAGE** 12V AC/DC

**WARRANTY** 2 years

**2  
YEAR**

**WARRANTY**



### OPTIONS



CODE	LEDSMDG415W	LEDSMDG43W	LEDSMDGY5W
<b>TYPE</b>	G4 - 1.5W	G4 - 3W	GY6.35 - 5W
<b>BASE</b>	G4	G4	GY 6.35
<b>KELVINS</b>	3000K	3000K	3000K
<b>LUMENS</b>	95lm	280lm	450lm
<b>WATTS</b>	1.5W	3W	5W





WARRANTY



DIMMABLE



MORE INFO

# L Lamps

## LED R7S

**BASE** R75

**BEAM ANGLE** 360°

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** Yes

**L70** 25,000hrs

**VOLTAGE** 230


**WARRANTY** 3 years

Lighting not exceeding 10hrs/day

**R7S 78MM**



**R7S 118MM**

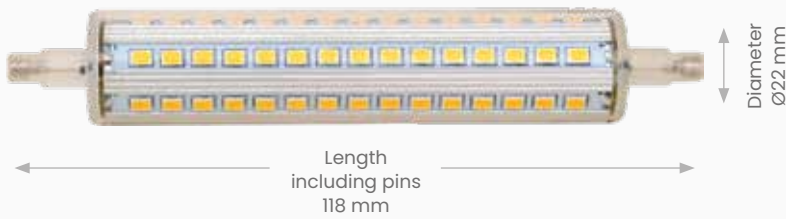

### OPTIONS



CODE	LEDR7S78MM6W3K	LEDR7S78MM6W4K	LEDR7S118MM10W3K	LEDR7S118MM10W4K
<b>TYPE</b>	R7S 78MM	R7S 78MM	R7S 118MM	R7S 118MM
<b>KELVINS</b>	3000K	4000K	3000K	4000K
<b>LUMENS</b>	660lm	690lm	1100lm	1150lm
<b>OPERATING TEMP</b>	-20° to 40°C	-20° to 40°C	-20° to 40°C	-20° to 40°C
<b>WATTS</b>	6W	6W	10W	10W

# Lamps

## LED GU10

**BASE** GU10

**BEAM ANGLE** 80°

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** Yes

**L70** 50,000hrs

**VOLTAGE** 230

**WARRANTY** 2 years



MORE INFO




DIMMABLE



WARRANTY

ECON GU10



### OPTIONS

<b>CODE</b>	ECONGU107W
<b>TYPE</b>	ECON GU10
<b>KELVINS</b>	3000K
<b>LUMENS</b>	500lm
<b>WATTS</b>	7W



WARRANTY



MORE INFO

# Lamps

## LED MR16

**BASE** MR16 GU5.3

**BEAM ANGLE** 80°

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** No

**L70** 30,000hrs

**VOLTAGE** 12V AC/DC

**WARRANTY** 2 years

ECON MR16



Diameter Ø50 mm

### OPTIONS



**CODE** ECONMR16W

**TYPE** ECON MR16

**KELVINS** 3000K

**LUMENS** 500lm

**WATTS** 6W

# L Lamps



MORE INFO



DIMMABLE\*



WARRANTY

## Filament LED A60

**BEAM ANGLE** 360°

**COLOUR TEMP** Fixed colour, refer kelvins below

**\*DIMMABLE** Model specific, refer below

**L70** 25,000hrs

**VOLTAGE** 230

**WARRANTY** 2 years



\* Low voltage models available  
12VA60E278W  
(not dimmable)

E27 Base\*

B22 Base\*



\*Not available in all models, refer below table

### OPTIONS



CODE	LEDA60E278W	LEDA60B228W	12VA60E278W
TYPE	A60	A60	A60
BASE	E27	B22	E27
KELVINS	2700K	2700K	2700K
LUMENS	800lm	800lm	800lm
WATTS	8W	8W	8W
VOLTAGE	230V	230V	12V
DIMMABLE	Yes	Yes	No



DIMMABLE\*



WARRANTY

### CANDLE



### ST64



### G45 \*Not Dimmable



## OPTIONS



CODE	LEDCANDLE4W	ST64E27	G45E14
TYPE	CANDLE	ST64	G45
BASE	E14	E27	E14
KELVINS	2700K	3000K	3000K
LUMENS	400lm	800lm	700lm
WATTS	4W	8W	6W
DIMMABLE	Yes	Yes	No

# Lamps

## Filament LED

**BEAM ANGLE** 360°

**COLOUR TEMP** Fixed colour, refer kelvins below

**\*DIMMABLE** Model specific, refer below

**L70** 25,000hrs

**VOLTAGE** 230

**WARRANTY** 2 years

# Lamps

## Decorative LED Filament Straight

**BEAM ANGLE** 360°

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** Yes

**L70** 25,000hrs

**VOLTAGE** 230

**WARRANTY** 2 years



MORE INFO



DIMMABLE



WARRANTY



**E27 Base\***



**B22 Base\***



\*Not available in all models, refer below table

### OPTIONS



CODE	LEDP180E279W	LEDP180B229W	LEDG200E279W	LEDG200B229W
TYPE	P180	P180	G200	G200
BASE	B22	E27	E27	B22
KELVINS	2700K	2700K	2700K	2700K
LUMENS	800lm	800lm	800lm	800lm
WATTS	9W	9W	9W	9W





WARRANTY



DIMMABLE

SLIM



G24D-2



# Lamps

## LED Frosted

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** Yes

**VOLTAGE** 230

**WARRANTY** 2 years

R80



GX53



### OPTIONS



CODE	LEDFLD10W4K	LEDB22SLIM9W3K	LEDSMDGX535W	LEDR8012W3K
<b>TYPE</b>	G24D-2	SLIM	GX53	R80
<b>BASE</b>	-	B22	-	E27
<b>BEAM ANGLE</b>	165°	360°	120°	270°
<b>KELVINS</b>	4000K	3000K	3000K	3000K
<b>L70</b>	20,000hrs	40,000hrs	35,000hrs	20,000hrs
<b>LUMENS</b>	900lm	810lm	450lm	960lm
<b>OPERATING TEMP</b>	-20° to 50°C	-20° to 50°C	-20° to 50°C	-30° to 50°C
<b>WATTS</b>	10W	9W	5W	12W

# Lamps

## Filament LED

**BEAM ANGLE** 360°

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** Yes

**L70** 25,000hrs

**VOLTAGE** 230

**WARRANTY** 2 years



MORE INFO



DIMMABLE



WARRANTY



\*Not available in all models, refer below table

### OPTIONS



CODE	LEDG95E278W	LEDG95B228W	LEDG125E278W
TYPE	G95	G95	G125
BASE	E27	B22	E27
KELVINS	2700K	2700K	2700K
LUMENS	400lm	400lm	800lm
WATTS	8W	8W	8W



WARRANTY



DIMMABLE



MORE INFO

# Lamps

## Opal Lamp

**BEAM ANGLE** 360°

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** Yes

**L70** 20,000hrs

**VOLTAGE** 230

**WARRANTY** 2 years



### OPTIONS



CODE	G95E27I2WO	G125E27I2WO
TYPE	G95	G125
BASE	E27	E27
KELVINS	4000K	3000K
LUMENS	1500lm	1500lm
WATTS	12W	12W

# Lamps

## Decorative LED Filament Spiral

**BEAM ANGLE** 360°

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** Yes

**L70** 25,000hrs

**VOLTAGE** 230

**WARRANTY** 2 years



MORE INFO



DIMMABLE



WARRANTY

ST64



Height  
140 mm

Diameter  
Ø64 mm

G95



Height  
140 mm

Diameter  
Ø95 mm

P180



Height  
320 mm

Diameter  
Ø180 mm

G200



Height  
275 mm

Diameter  
Ø200 mm

### OPTIONS



CODE	DECOST64B224W	DECOG95E274W	DECOG95B224W	DECOPI80B224W	DECOG200E274W	DECOG200B224W
<b>TYPE</b>	ST64	G95	G95	P180	G200	G200
<b>BASE</b>	B22	E27	B22	B22	E27	B22
<b>KELVINS</b>	1800K	1800K	1800K	1800K	1800K	1800K
<b>LUMENS</b>	200lm	200lm	200lm	200lm	200lm	200lm
<b>WATTS</b>	4W	4W	4W	4W	4W	4W



DIMMABLE



WARRANTY



MORE INFO

# Lamps

## Filament LED Mirror

G95 MIRROR



Height  
140 mm

Diameter  
Ø95 mm

**BEAM ANGLE** 360°

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** Yes

**L70** 20,000hrs

**VOLTAGE** 220-240

**WARRANTY** 2 years



### OPTIONS

**CODE** G95E2712WM

**TYPE** G95

**BASE** E27

**KELVINS** 3000K

**LUMENS** 900lm

**WATTS** 12W



## Featured Mirror Lights

### Callista

Page 119



### Axel

Page 122







# Mirror Lights

## Tiago

Page 125



## Willow

Page 123



# M

Mirror Lights



MORE INFO



IP RATING



WARRANTY

## Callista LED Demister Mirror Traditional

### APPLICATION

Commercial / Residential  
Interior only

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >90

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 44

**L70** 36,000hrs

**MATERIAL** Silver coated glass

**MOUNT** Surface, horizontal or  
vertical

**OPERATING TEMP** 20°C to 50°C

**POWER FACTOR** 0.80

**RATED CURRENT** 0.18A


**TECH** Integrated SMD LED

**VOLTAGE** 230

**WARRANTY** 2 years

**WIRING TYPE** Hard-wired,  
no switch

\*Can be hung vertically or  
horizontally

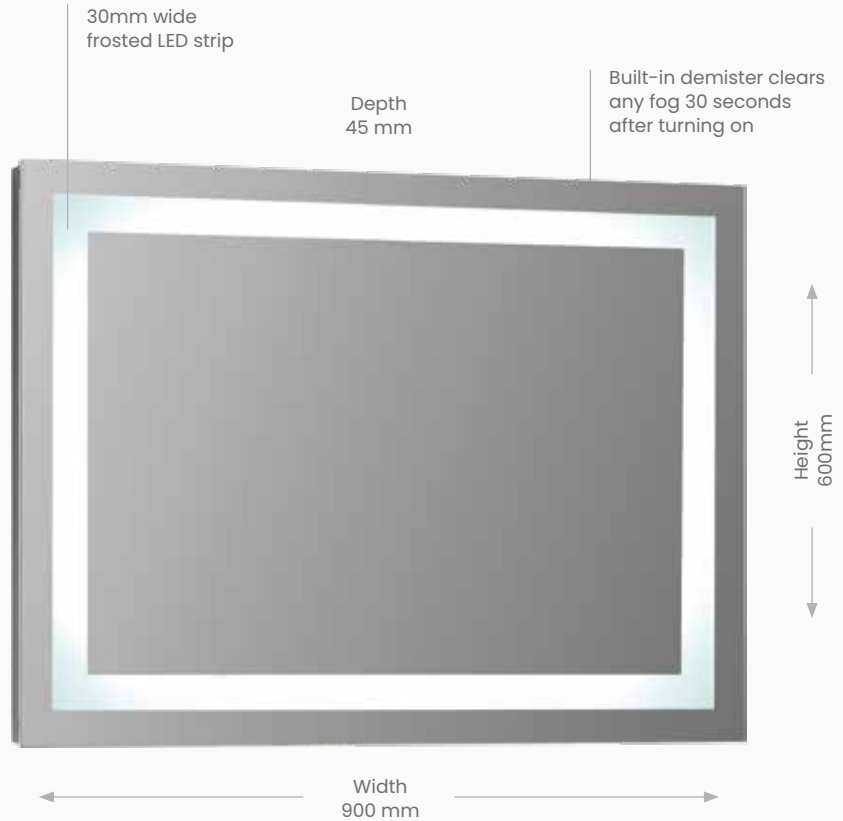

### OPTIONS

<b>CODE</b>	<b>BM9060</b>
<b>DEMISTER POWER</b>	10W
<b>COLOUR</b>	Silver coated glass
<b>FRAME</b>	Frameless
<b>KELVINS</b>	4000K
<b>LUMENS</b>	950lm
<b>WATTS</b>	32W



IP RATING




WARRANTY



MORE INFO

Depth  
35 mm

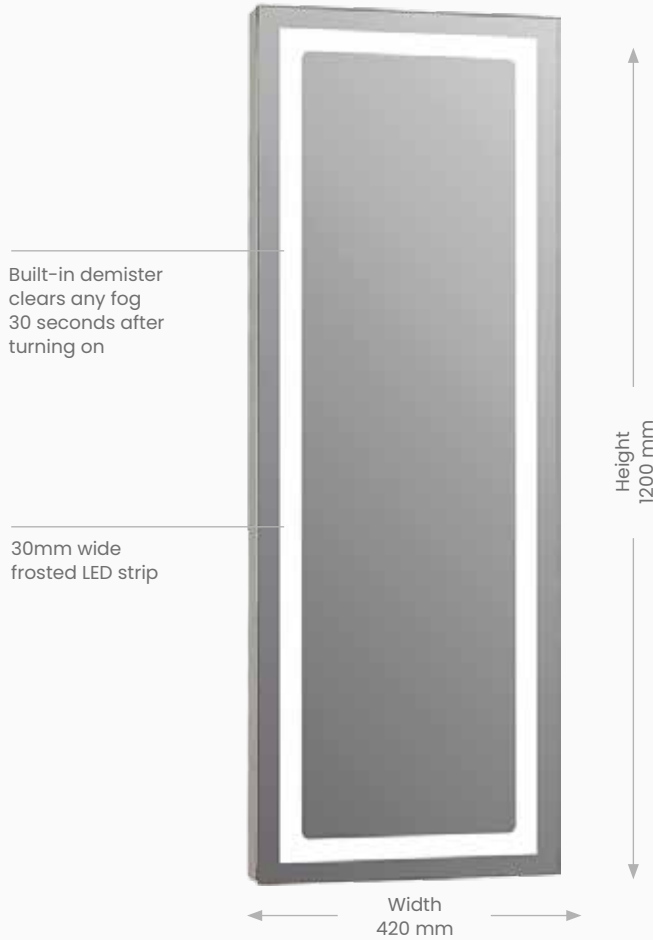

## OPTIONS

<b>CODE</b>	<b>BM4214</b>
<b>DEMISTER POWER</b>	24W
<b>COLOUR</b>	Silver coated glass
<b>FRAME</b>	Frameless
<b>KELVINS</b>	4000K
<b>LUMENS</b>	710lm
<b>WATTS</b>	24W

# M

Mirror Lights

## Callista LED Demister Mirror Full Length

### APPLICATION

Commercial / Residential  
Interior only

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 44

**L70** 36,000hrs

**MATERIAL** Silver coated glass

**MOUNT** Surface, horizontal or  
vertical

**OPERATING TEMP** 20°C to 50°C

**POWER FACTOR** 0.9

**RATED CURRENT** 0.20A

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 2 years

**WIRING TYPE** Hard-wired,  
no switch

\*Can be hung vertically or  
horizontally

# M Mirror Lights



MORE INFO



IP RATING



WARRANTY

## Callista LED Demister Mirror Round

### APPLICATION

Commercial / Residential  
Interior only

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >90

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 44

**L70** 36,000hrs

**MATERIAL** Silver coated glass,  
aluminium frame

**MOUNT** Surface

**OPERATING TEMP** 20°C to 50°C

**POWER FACTOR** 0.9


**RATED CURRENT** 0.09A

**TECH** Integrated SMD LED

**VOLTAGE** 230V

**WARRANTY** 2 years

**WIRING TYPE** Hard-wired,  
no switch

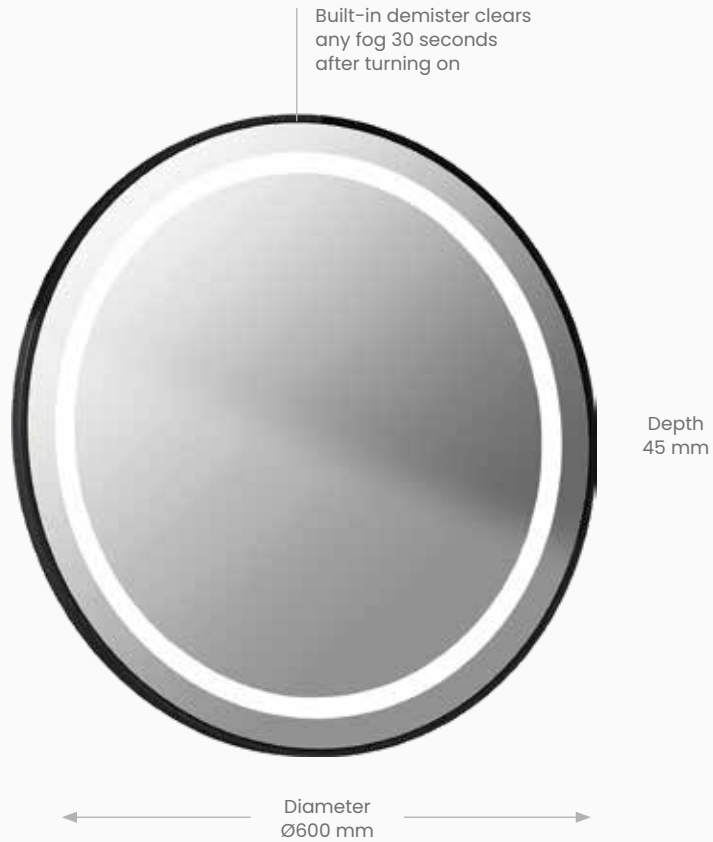

### OPTIONS

<b>CODE</b>	<b>BM6060</b>
<b>DEMISTER POWER</b>	8W
<b>COLOUR</b>	Silver coated glass, aluminium frame
<b>FRAME</b>	Yes, Black
<b>KELVINS</b>	4000K
<b>LUMENS</b>	400lm
<b>WATTS</b>	13.5W



IP RATING



DOUBLE INSULATED



WARRANTY



MORE INFO

# M Mirror Lights

## Axel Over Cabinet



**APPLICATION**

Commercial / Residential Interior only

**BEAM ANGLE** 140°

**CABLE ENTRY POINTS** Single

**COLOUR TEMP** Fixed colour, refer kelvins below

**CRI** >80

**DRIVER** Integral

**IP RATING** 44

**L70** 40,000hrs

**MATERIAL** Aluminium, ABS, polymethyl methacrylate

**MOUNT** Surface, over cabinetry

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 2 years

Mirror lights are designed to sit on top of bathroom cabinets.

### OPTIONS



**CODE** LEDML4525

**BASE SIZE (MM)** 80 x 30

**COLOUR** Brushed Chrome

**KELVINS** 4000K

**LUMENS** 320lm

**WATTS** 4.8W

# M

Mirror Lights



MORE INFO



IP RATING



WARRANTY

## Willow Medium

### APPLICATION

Residential  
Interior

**BEAM ANGLE** 160°–170°

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 20

**L70** 65,000hrs

**LENS** Diffused

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

### MEDIUM

Base size  
150L x 55H x 35D mm



### OPTIONS



CODE	MPL10W3K-BLK	MPL10W4K-BLK	MPL10W4K-SN	MPL10WCCT-SN
COLOUR	Black	Black	Satin Nickel	Satin Nickel
KELVINS	3000K	4000K	4000K	3000K/ 4000K/ 6000K
LUMENS	680lm	700lm	700lm	660lm/ 670lm/ 640lm
SIZE	Medium	Medium	Medium	Medium
WATTS	10W	10W	10W	10W





IP RATING




WARRANTY



MORE INFO

# M Mirror Lights

## Willow Large

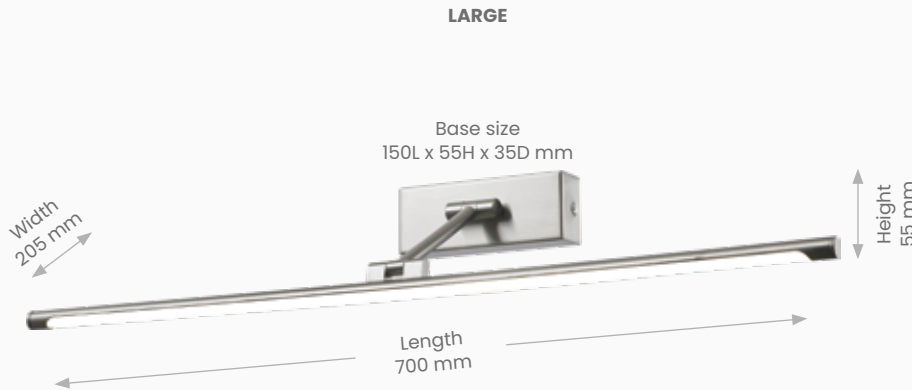

**APPLICATION**

Residential  
Interior

**BEAM ANGLE** 160°–170°

**COLOUR TEMP** Fixed colour,  
Tri-colour switchable,  
refer kelvins below

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 20

**L70** 65,000hrs

**LENS** Diffused

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

### OPTIONS



**CODE**

MPL12W3K-BLK

MPL12W4K-BLK

MPL12WCCT-SN

**COLOUR**

Black

Black

Satin Nickel

**KELVINS**

3000K

4000K

3000K / 4000K/ 6000K

**LUMENS**

820lm

840lm

780lm/ 760lm/ 750lm

**SIZE**

Large

Large

Large

**WATTS**

12W

12W

12W

# M Mirror Lights



MORE INFO



IP RATING



WARRANTY

## Tiago 600 Square

### APPLICATION

Commercial / Residential  
Interior only

**BEAM ANGLE** 120°

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 44

**L70** 30,000hrs

**MATERIAL** Aluminium with  
polycarbonate lens


**MOUNT** Surface

**OPERATING TEMP** 20°C to 50°C

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

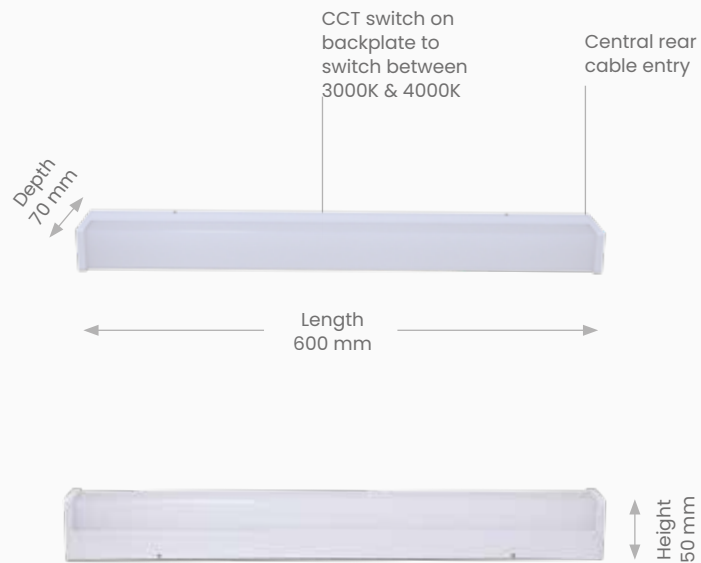

### OPTIONS



CODE	MLS600CCT-WH	MLS600CCT-BLK	MLS600CCT
COLOUR	White	Black	Chrome
DIMENSIONS	600L x 50H x 70D	600L x 50H x 70D	600L x 50H x 70D
KELVINS	3000K / 4000K	3000K / 4000K	3000K / 4000K
LUMENS	800lm / 840lm	800lm / 840lm	800lm / 840lm
SIZE	Small	Small	Small
WATTS	12W	12W	12W



IP RATING



WARRANTY



MORE INFO

# M Mirror Lights

## Tiago 900 Square

**APPLICATION**

Commercial / Residential  
Interior only

**BEAM ANGLE** 120°

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 44

**L70** 30,000hrs

**MATERIAL** Aluminium with  
polycarbonate lens

**MOUNT** Surface

**OPERATING TEMP** 20°C to 50°C

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years



### OPTIONS



CODE	MLS900CCT	MLS900CCT-BLK
COLOUR	Chrome	Black
DIMENSIONS	900L x 50H x 70D	900L x 50H x 70D
KELVINS	3000K / 4000K	3000K / 4000K
LUMENS	1150lm / 1200lm	1150lm / 1200lm
SIZE	Medium	Medium
WATTS	18W	18W

# M Mirror Lights



MORE INFO



IP RATING



WARRANTY

## Tiago 1200 Square

### APPLICATION

Commercial / Residential  
Interior only

**BEAM ANGLE** 120°

**COLOUR TEMP** Tri-colour  
switchable, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 44

**L70** 30,000hrs

**MATERIAL** Aluminium with  
polycarbonate lens


**MOUNT** Surface

**OPERATING TEMP** 20°C to 50°C

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

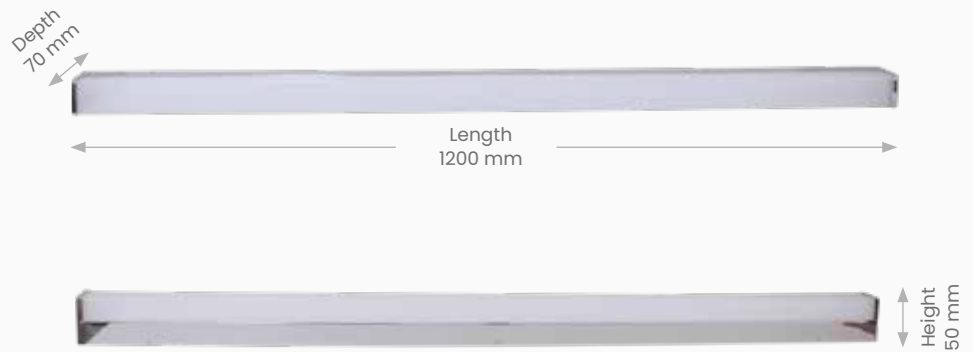

### OPTIONS



**CODE** MLS1200CCT

**COLOUR** Chrome

**DIMENSIONS** 1200L x 50H x 70D

**KELVINS** 3000K / 4000K

**LUMENS** 1450lm / 1500lm

**SIZE** Large

**WATTS** 24W



Image uses Willow,  
refer page 123.



## Featured Pendants

**Stella**

Page 151



**Daisy**

Page 147







# Pendants

## Spend50

Page 133



## Milan

Page 142



# Pendants



MORE INFO



IP RATING



WARRANTY

## Spend40 Linkable White

### APPLICATION

Commercial  
Interior

**CABLE** Pendant is supplied  
with 2m adjustable  
suspension cables

**CEILING ROSE (MM)** Ø90 x 30H

**CRI** >80

**DIMMABLE** No

**DRIVER** Built-in

**IP RATING** 40

**L70** 50,000hrs

**LIGHT DIRECTION** Up / Down

**MATERIAL** Aluminium

**MOUNT** Suspended


**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

Each fitting comes with  
1 x straight joiner

Can be linked into a square,  
rectangle or straight line

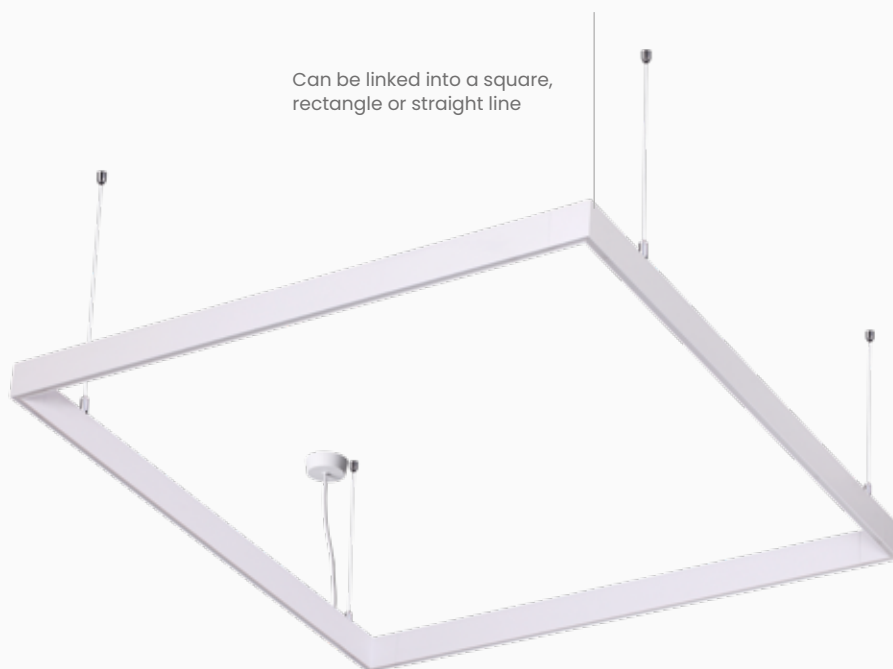

### LINK UP TO 400W WITH JOINERS

**S4090DEG-WH**  
Corner Joiner  
White



Straight Joiner



### OPTIONS



CODE	SPEND40-600-WH	SPEND40-1500-WH	S4090DEG-WH
COLOUR	White	White	White
SIZE	608L x 18.5W x 80H mm	1498L x 18.5W x 80H mm	140L x 80W x 140H mm
KELVINS	4000K	4000K	-
LUMENS	1800lm	3200lm	-
SIZE	Small	Large	-
WATTS	25W	40W	-



IP RATING




WARRANTY




MORE INFO


Can be linked into a square, rectangle or straight line

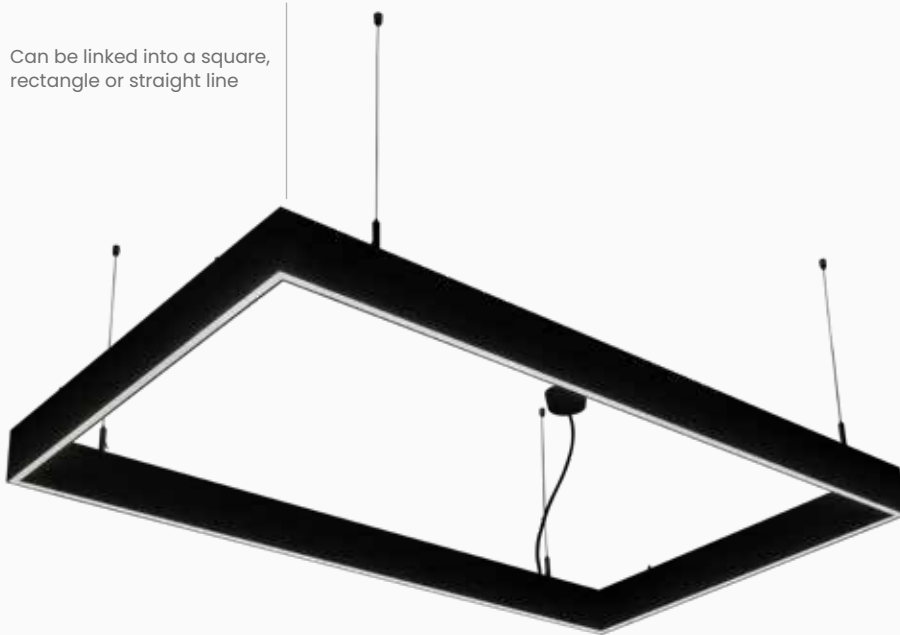

LINK UP TO 400W WITH JOINERS



**S4090DEG-BLK**  
Corner Joiner  
Black



Straight Joiner

# Pendants

## Spend40 Linkable Black

**APPLICATION**

Commercial Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cables

**CEILING ROSE (MM)** Ø90 x 30H

**CRI** >80

**DIMMABLE** No

**DRIVER** Built-in

**IP RATING** 40

**L70** 50,000hrs

**LIGHT DIRECTION** Up / Down

**MATERIAL** Aluminium

**MOUNT** Suspended

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

Each fitting comes with 1 x straight joiner

### OPTIONS



CODE	SPEND40-600-BLK	SPEND40-1500-BLK	S4090DEG-BLK
COLOUR	Black	Black	Black
SIZE	608L x 18.5W x 80H mm	1498L x 18.5W x 80H mm	140L x 80W x 140H mm
KELVINS	4000K	4000K	-
LUMENS	1800lm	3200lm	-
SIZE	Small	Large	-
WATTS	25W	40W	-

# Pendants



MORE INFO



WARRANTY



DIMMABLE



IP RATING

## Spend50 L15 Linkable

### APPLICATION

Commercial  
Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cables

**CRI** >90

**COLOUR TEMP** Colour switchable, refer kelvins below

**DIMMABLE** No

**DRIVER** Boke

**IP RATING** 20

**L70** 50,000hrs

**MATERIAL** Aluminium, microprismatic diffuser

**MOUNT** Suspended or surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS

CODE	SPEND50-L15-BLK	SPEND50-L15-WH
COLOUR	Black	White
KELVINS	3000K/ 4000K	3000K/ 4000K
WATTS	50W	50W



IP RATING



WARRANTY




UGR



MORE INFO

# Pendants

## Spend50 L18 Linkable

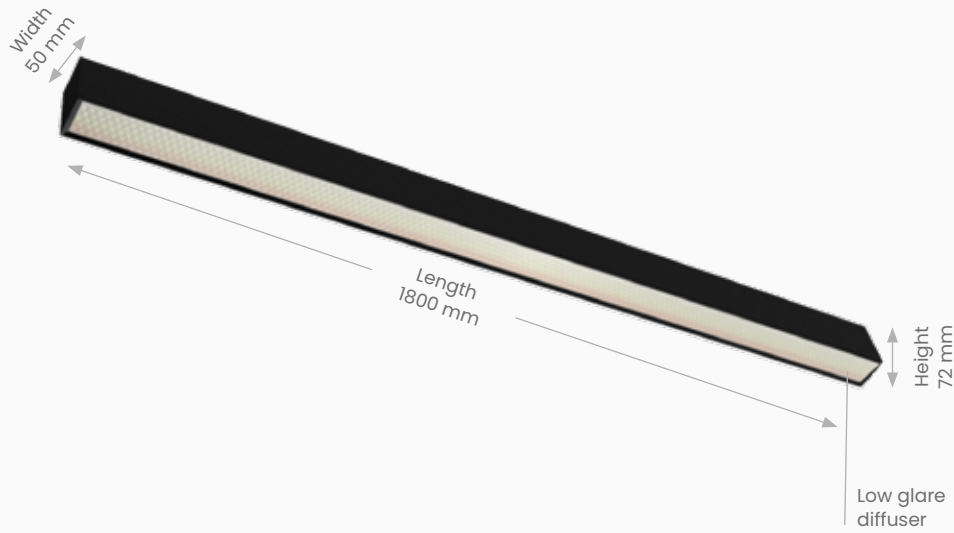

### APPLICATION

Commercial  
Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cables

**CRI** >90

**COLOUR TEMP** Colour switchable, refer kelvins below

**DIMMABLE** No

**DRIVER** Boke

**IP RATING** 20

**L70** 50,000hrs

**MATERIAL** Aluminium, microprismatic diffuser

**MOUNT** Suspended or surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 5 years



### OPTIONS

CODE	SPEND50-L18-BLK	SPEND50-L18-WH
COLOUR	Black	White
KELVINS	3000K/ 4000K	3000K/ 4000K
WATTS	60W	60W

# Pendants

## Spend08 Linkable

### APPLICATION

Commercial Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cables

**CRI** >80

**DIMMABLE** No

**DRIVER** Built-in

**IP RATING** 40

**L70** 50,000hrs

**MATERIAL** Aluminium

**MOUNT** Suspended or surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years





SEE ROOM SETTING




IP RATING



WARRANTY

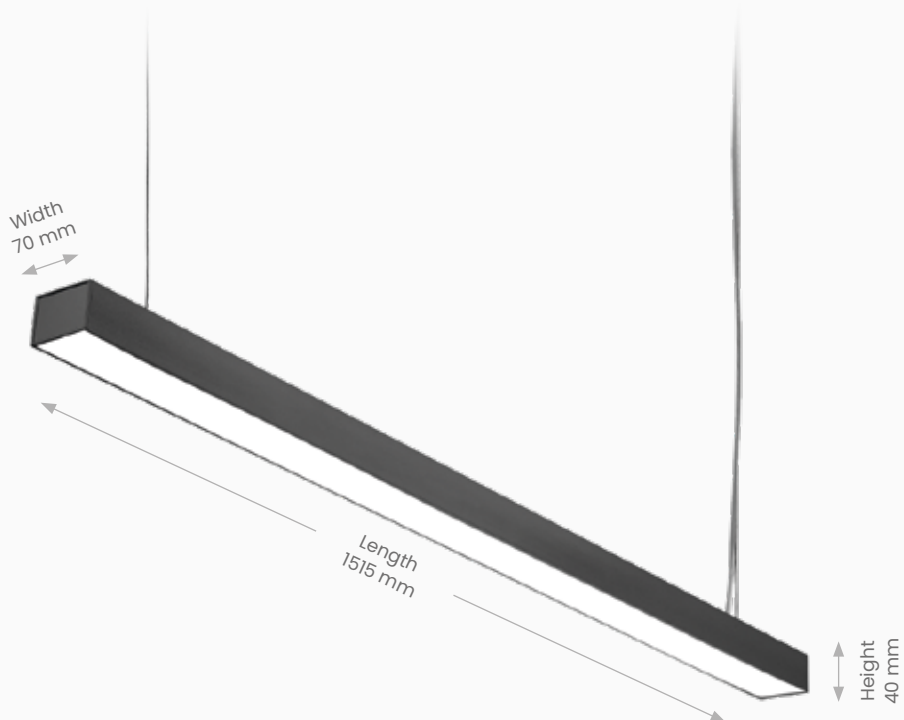

Straight Joiner included to join between two pendants.



Back cover plates are installed after cable links have been fitted.

### OPTIONS



CODE	SPEND08-SIL	SPEND08-BLK
COLOUR	Silver	Black
KELVINS	4000K	4000K
LUMENS	3940lm	3940lm
WATTS	36W	36W





IP RATING



WARRANTY



DIMMABLE



MORE INFO

# Pendants

## Fin

### APPLICATION

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**\*DIMMABLE** Yes, lamp dependent

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Plywood, fabric cord

**MOUNT** Suspended

**VOLTAGE** 230V

**WARRANTY** 2 years



### OPTIONS



**CODE** P828-BLK

**COLOUR** Matt Black

**WATTS** 60W Max

# Pendants

## Harper

### APPLICATION

Residential  
Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, refer to compatibility download online

**DRIVER** Built-in

**IP RATING** 20

**L70** 36,000hrs

**MATERIAL** Metal

**MOUNT** Suspended

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 2 years



MORE INFO



IP RATING



DIMMABLE



WARRANTY



### OPTIONS



CODE	WP387S-BLK	WP387L-BLK	*More colours available online, while stocks last
COLOUR	Black	Black	
KELVINS	3000K	3000K	
LUMENS	600lm	1200lm	
WATTS	18W Max	40W Max	



IP RATING



DIMMABLE



WARRANTY



MORE INFO

# Pendants

## Chelsea



### APPLICATION

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, lamp dependent

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Plywood, fabric cord

**MOUNT** Suspended

**VOLTAGE** 230V

**WARRANTY** 2 years

### OPTIONS



**CODE** W370

**COLOUR** Black

**WATTS** 60W Max

# Pendants

## Leo WO Natural Trim

### APPLICATION

Commercial / Residential  
Interior

**CABLE** Pendant is supplied  
with 2m adjustable  
suspension cable

**DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27  
(sold separately)

**MATERIAL** Plywood, fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years



MORE INFO



IP RATING



DIMMABLE



WARRANTY



### OPTIONS



CODE	WO450	WO600
COLOUR	Natural Wood	Natural Wood
SIZE	Small	Large
WATTS	60W Max	60W Max



IP RATING



WARRANTY



DIMMABLE



MORE INFO

# Pendants

## Leo WH White Trim



### APPLICATION

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Plywood, fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years

### OPTIONS



CODE	WH450	WH600
COLOUR	White trim	White trim
SIZE	Small	Large
WATTS	60W Max	60W Max

# P

# Pendants

## Gloria

### APPLICATION

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**\*DIMMABLE** Yes, lamp dependent

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Plywood, fabric cord

**MOUNT** Suspended

**VOLTAGE** 230V

**WARRANTY** 2 years



SEE ROOM SETTING



IP RATING



DIMMABLE



WARRANTY



### OPTIONS

**CODE**

W360

**COLOUR**

Natural Wood

**WATTS**

60W Max





IP RATING



DIMMABLE\*




WARRANTY



MORE INFO

# Pendants

## OVERSIZED CORDSET PENDANT

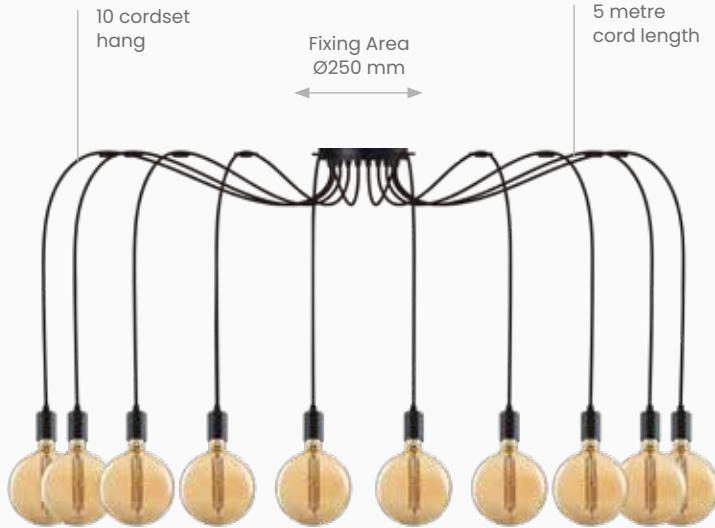

## Milan 10 cord set

### APPLICATION

Commercial / Residential Interior

**CABLE LENGTH** 5m

\***DIMMABLE** Yes, lamp dependent

**IP RATING** 20

**LAMP** Replaceable B22

**MATERIAL** Metal, fabric cord

**MOUNT** Suspended

**VOLTAGE** 230V

**WARRANTY** 2 years

## OPTIONS



CODE	P825-BLK	P825-G95	P825-G125	P825-G200S	P825-G200C
<b>COLOUR</b>	Black No lamp	Black with Amber Lamps	Black with Clear Lamps	Black with Amber Straight	Black with Amber Curl
<b>KELVINS</b>	N/A	1800K	2700K	2700K	2700K
<b>LUMENS</b>	N/A	2000lm	4000lm	8000K	8000K
<b>WATTS</b>	60W Max per cord set	40W	80W	90W	90W

# Pendants

## Weastly Cordsets

### APPLICATION

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Metal, fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years



MORE INFO



IP RATING



DIMMABLE



WARRANTY



### OPTIONS



CODE

P811-BLK

P811-WH

COLOUR

Black

White

WATTS

60W Max

60W Max



IP RATING



DIMMABLE



WARRANTY



SEE ROOM SETTING

# Pendants

## Mia Cordsets

**APPLICATION**

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Metal, fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years

\*Can hold a lamp shade, max weight 2kg

Fixing Area  
Ø110 mm



Pair with matching wall light on page 192

Lamp sold separately

Height  
95 mm

Diameter  
Ø50 mm

### OPTIONS



**CODE**

KP232-BLK

KP232-BR

KP232-WH

**COLOUR**

Black

Brushed Brass

White

**WATTS**

60W Max

60W Max

60W Max

# P

## Pendants

### Esther

#### APPLICATION

Residential  
Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, lamp dependent

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Glass, metal, fabric cord

**VOLTAGE** 230V

**WARRANTY** 2 years



SEE ROOM SETTING



IP RATING



DIMMABLE



WARRANTY



#### OPTIONS



#### CODE

KP199

#### COLOUR

Glass, Brass, Gun Metal

#### WATTS

40W Max



IP RATING



DIMMABLE



WARRANTY



MORE INFO



# Pendants

## Jessica

**APPLICATION**  
Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Glass, metal, fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years

### OPTIONS



**CODE**

KP911-BLK

KP911-BR

**COLOUR**

Black

Brass

**WATTS**

40W Max

40W Max

# P

## Pendants

### Daisy

#### APPLICATION

Commercial / Residential  
Interior

**CABLE** Pendant is supplied  
with 2m adjustable  
suspension cable

**DIMMABLE** Yes, lamp  
dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27  
(sold separately)

**MATERIAL** Opal glass, metal,  
fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years



MORE INFO



WARRANTY



DIMMABLE



IP RATING



#### OPTIONS



**CODE**

KP914

**COLOUR**

Black

**WATTS**

40W Max



IP RATING



WARRANTY



DIMMABLE



SEE ROOM SETTING

# Pendants

## Lux

### APPLICATION

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Opal white glass

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years



### OPTIONS



CODE	VP319S	VP319L	VP343
SIZE	Small	Medium	Large
WATTS	60W Max	60W Max	60W Max



# Pendants

## Sofia

### APPLICATION

Residential  
Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Metal, fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years



SEE ROOM SETTING




IP RATING



DIMMABLE



WARRANTY

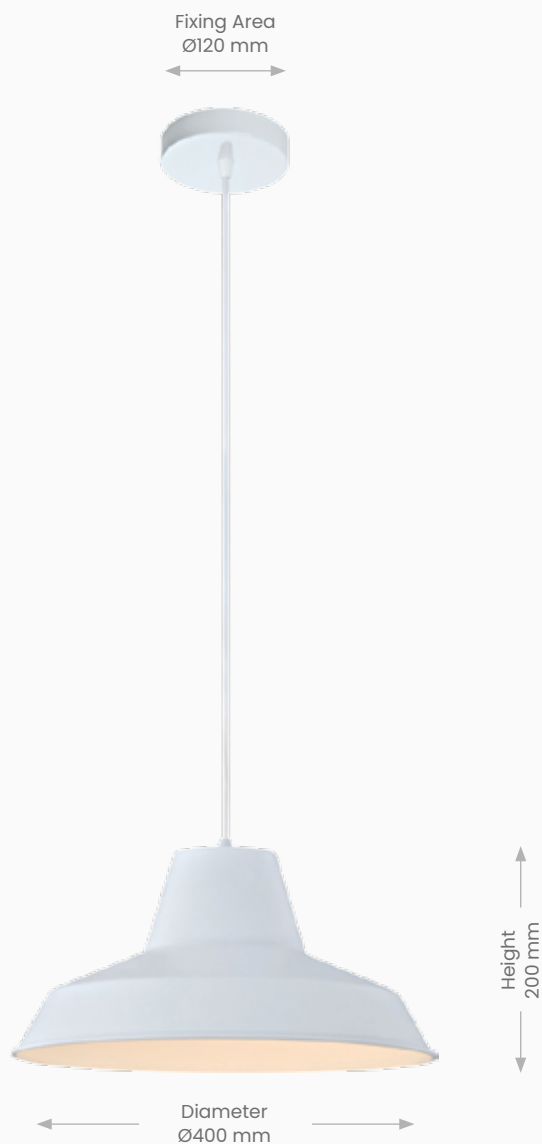

### OPTIONS



**CODE** P827-WH

**COLOUR** White

**WATTS** 60W Max



IP RATING



DIMMABLE\*




WARRANTY



SEE ROOM  
SETTING!

# Pendants

## Theo

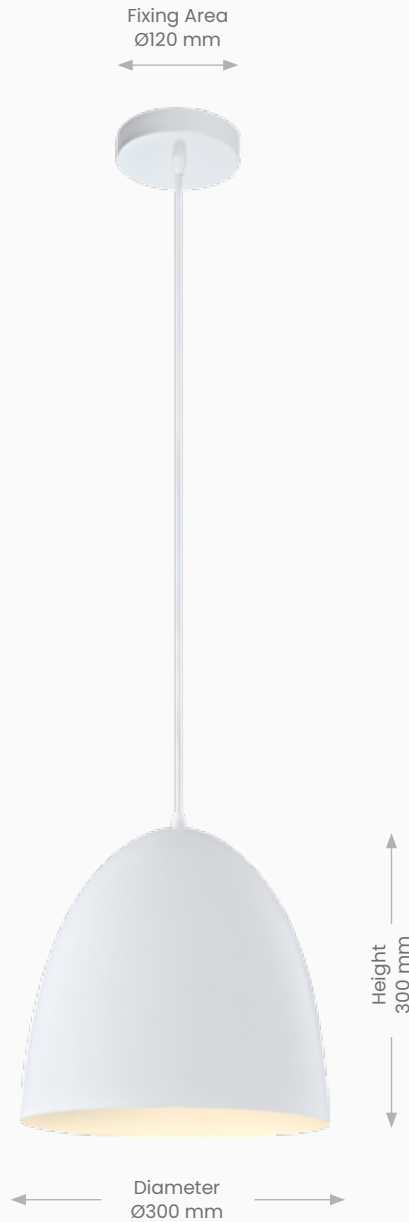

### APPLICATION

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**\*DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Metal, fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years

\*Custom Ebony Black available on request, lead times apply

### OPTIONS



CODE	P822-BCH	P822-WH	*More colours available online
COLOUR	Brushed Chrome	White	
WATTS	60W Max	60W Max	

# P

## Pendants

### Stella

#### APPLICATION

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**\*DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Metal, fabric cord

**MOUNT** Suspended

**VOLTAGE** 230V

**WARRANTY** 2 years



SEE ROOM SETTING



IP RATING



DIMMABLE



WARRANTY



#### OPTIONS



**CODE** P823-BLK

**COLOUR** Black

**WATTS** 60W Max



IP RATING



DIMMABLE\*



WARRANTY



SEE ROOM SETTINGI

# Pendants

## Archie

### APPLICATION

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Metal, fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years

\*Custom White available on request, lead times apply



### OPTIONS



**CODE** P821-BLK

**COLOUR** Black

**WATTS** 60W Max

# Pendants

## Olive

### APPLICATION

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Metal, fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years



SEE ROOM SETTING



IP RATING



DIMMABLE\*



WARRANTY



### OPTIONS



CODE	P806-SGM	P806-WH	P806-BCH	*More colours available online
COLOUR	Satin Gun Metal	White	Brushed Chrome	
WATTS	60W Max	60W Max	60W Max	



IP RATING



WARRANTY



SEE ROOM  
SETTINGI



# Pendants

## Harry

**APPLICATION**

Commercial / Residential Interior

**CABLE** Pendant is supplied with 2m adjustable suspension cable

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Plaster, fabric cord

**MOUNT** Suspended

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years

### OPTIONS



**CODE**


**CONCRETE  
2601-WH**

**COLOUR**

White

**WATTS**

60W Max

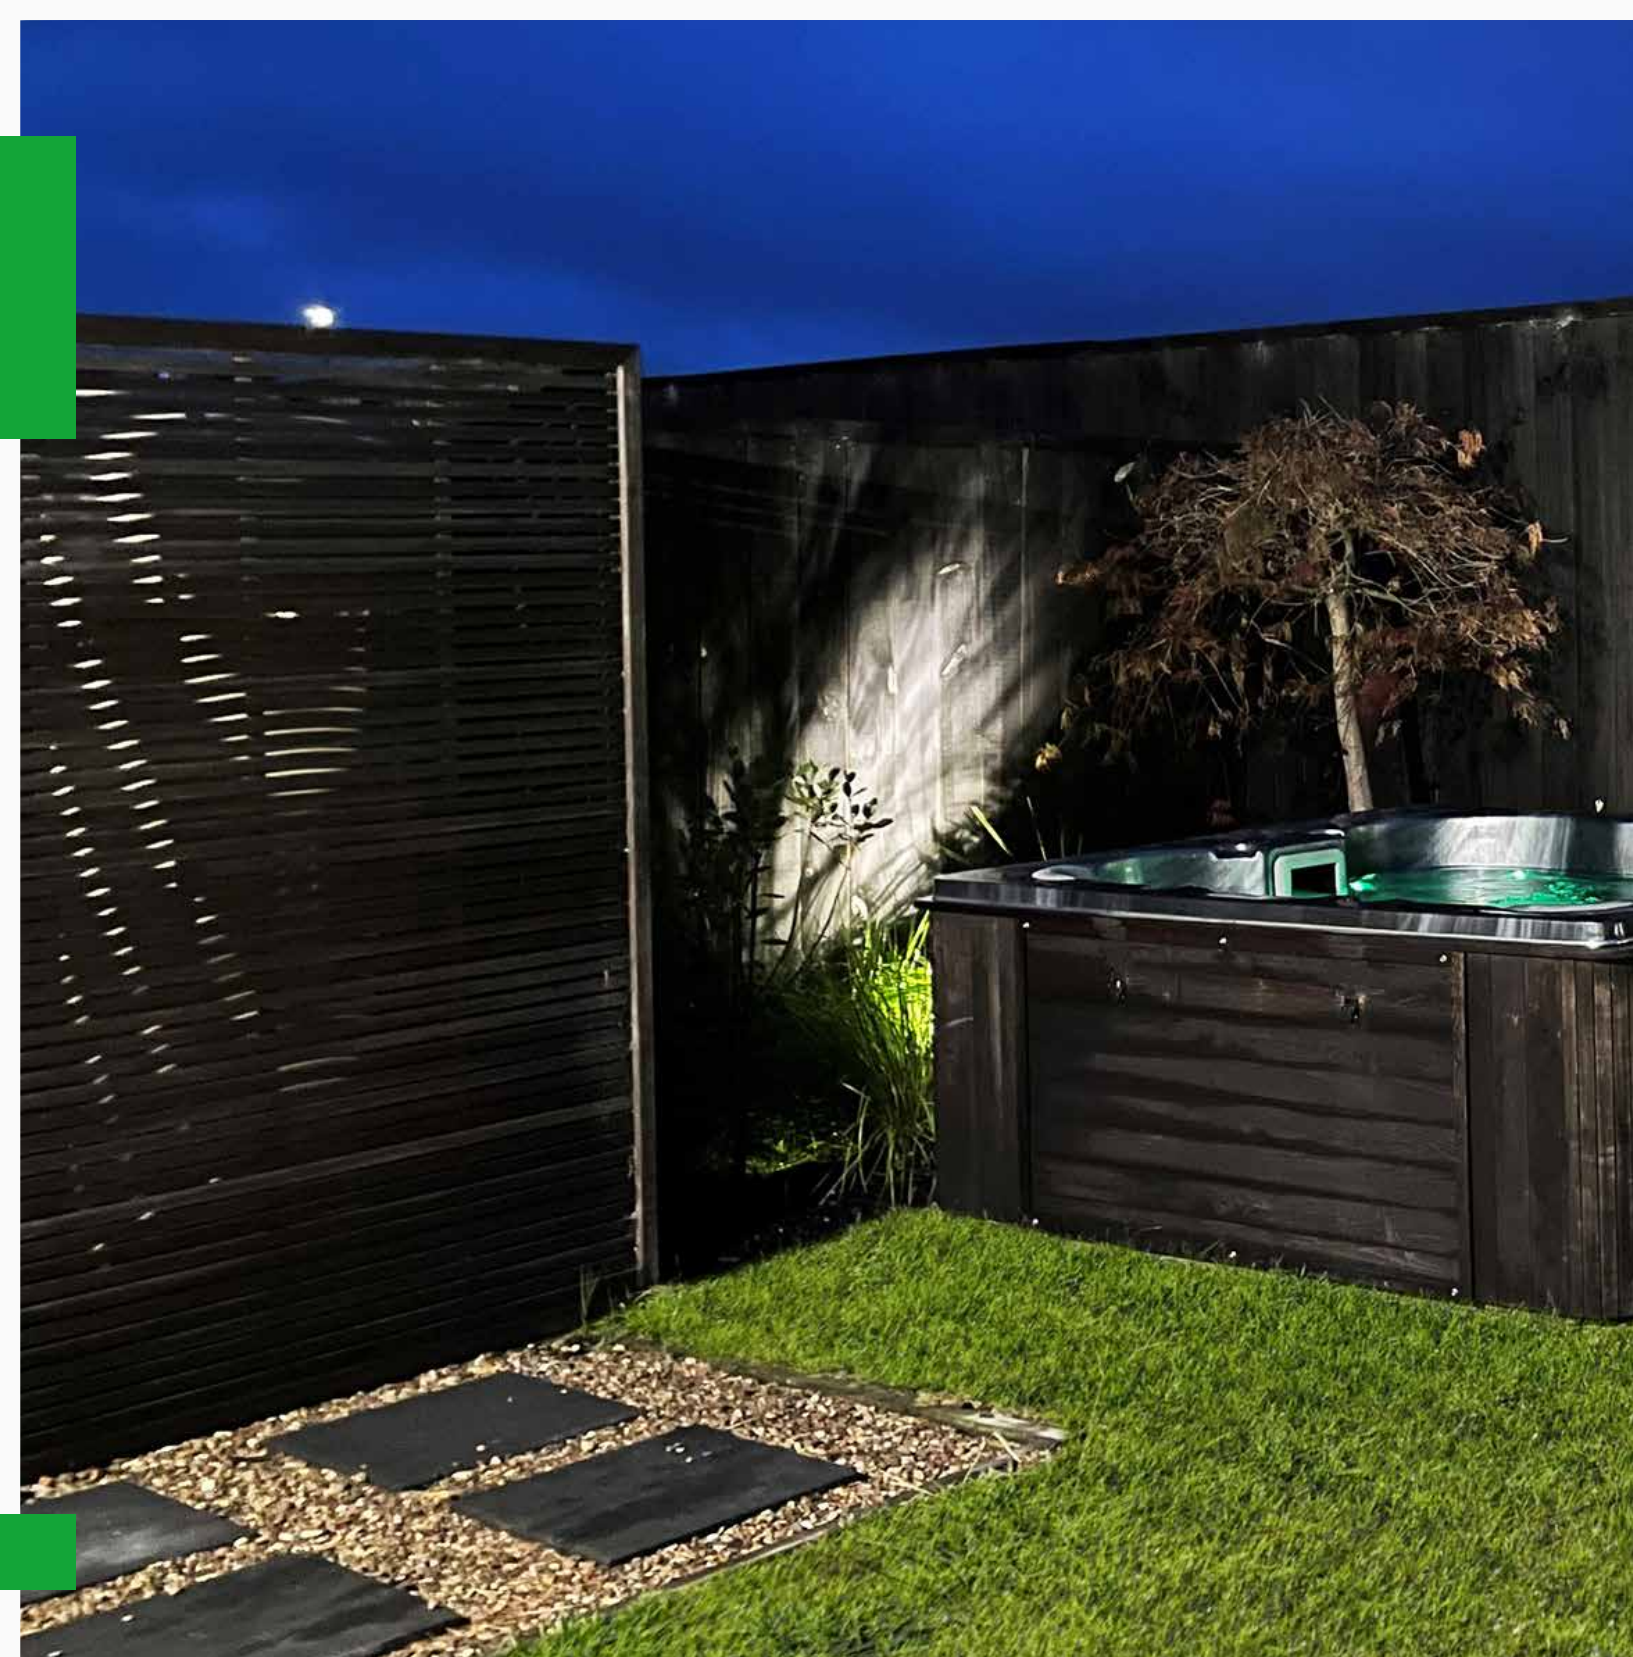

## Featured Spotlights – Exterior

### Bullet

Page 161



### Bullet+

Page 159







# Spotlights Exterior

## Eden

Page 157



## Eden+

Page 158



# S

## Spotlights



MORE INFO



WARRANTY



IP RATING

## Eden SPC Spike Mount

### APPLICATION

Commercial / Residential  
Exterior

**BASE** Adjustable 320°  
swivel base

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**DRIVER** Separate 12V driver  
required, refer page 67

**HEAD** Adjustable 120°  
swivel head

**IK RATING** 08

**IP RATING** 54

**LAMP TYPE** MR16 7W Max  
(not included)

**MATERIAL** UV resistant, anti-  
corrosion ABS, polycarbonate  
body and diffuser

**MOUNT** Spike

**TECH** Replaceable LED

**VOLTAGE** 12V

**WARRANTY** 3 years



REPLACEABLE LAMP MODEL



### OPTIONS

**CODE** LSP1603

**COLOUR** Black

**HEAD SIZE (MM)** Ø60 x 110L

**WATTS** 7W Max



IP RATING



WARRANTY



MORE INFO

# S

Spotlights

## Eden+ SPC Spike Mount



**APPLICATION**

Commercial / Residential  
Exterior

**BASE** Adjustable 320°  
swivel base

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**DRIVER** Separate 12V driver  
required, refer page 67

**HEAD** Adjustable 120°  
swivel head

**IK RATING** 08

**IP RATING** 54

**LAMP TYPE** MR16 7W Max  
(not included)

**MATERIAL** UV resistant, anti-  
corrosion ABS, polycarbonate  
body and diffuser

**MOUNT** Spike

**TECH** Replaceable LED

**VOLTAGE** 12V

**WARRANTY** 3 years

### OPTIONS



**CODE** LSP1606

**COLOUR** Black

**HEAD SIZE (MM)** Ø86 x 155L

**WATTS** 7W Max

# S Spotlights



MORE INFO



WARRANTY



IP RATING

## Bullet+ Low Glare Surface Mount

### APPLICATION

Commercial / Residential  
Exterior

**BASE** Adjustable 320°  
swivel base

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 05

**IP RATING** 65

**MATERIAL** Powder coated  
anodised aluminium, marine  
grade paint

**MOUNT** Surface

**TECH** Integrated LED

**TILT ANGLE** 45°

**VOLTAGE** 230V

**WARRANTY** 3 years



Glare reducing  
honey comb lens  
with light spill  
protection hood

### OPTIONS



CODE	BBA14	BBA16
BEAM ANGLE	23°	23°
COLOUR	Black	Black
KELVINS	3500K	3500K
LUMENS	300lm	750lm
SIZE	Small	Large
WATTS	5W	10W



IP RATING




WARRANTY



MORE INFO

# S Spotlights

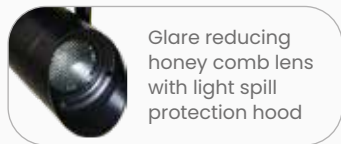

## Bullet+ Low Glare Spike Mount

### APPLICATION

Commercial / Residential Exterior

**BASE** Adjustable 320° swivel base

**BEAM ANGLE** 23°

**COLOUR TEMP** Fixed colour, refer kelvins below

**DRIVER** Requires 24V DC driver, refer page 68

**HEAD** Adjustable 120° swivel head

**IK RATING** 05

**IP RATING** 65

**MATERIAL** Powder coated anodised aluminium, marine grade paint

**MOUNT** Spike

**TECH** Integrated LED

**TILT ANGLE** 45°

**VOLTAGE** 24V DC

**WARRANTY** 3 years

### OPTIONS



CODE	BSP13	BSP15
COLOUR	Black	Black
KELVINS	3500K	3500K
LUMENS	300lm	750lm
SIZE	Small	Large
WATTS	5W	10W

# S Spotlights



MORE INFO



IP RATING



WARRANTY

## Bullet Spike Mount

### APPLICATION

Commercial / Residential Exterior

**BASE** Adjustable 320° swivel base

**CABLE** 1m

**COLOUR TEMP** Fixed colour, refer kelvins below

**DRIVER** Separate 24V DC driver required, refer page 68

**HEAD** Adjustable 120° swivel head

**IP RATING** 65

**MATERIAL** Powder coated anodised aluminium

**MOUNT** Spike

**TECH** Integrated LED

**TILT ANGLE** 45°

**VOLTAGE** 24V DC

**WARRANTY** 3 years

SMALL



MEDIUM



LARGE



### OPTIONS



CODE	BSP07	BSP03	BSP05
BEAM ANGLE	30°	23°	23°
COLOUR	Black	Black	Black
KELVINS	3500K	3500K	3500K
LUMENS	160lm	460lm	1020lm
SIZE	Small	Medium	Large
WATTS	2.6W	5.5W	10.5W





IP RATING



WARRANTY



MORE INFO

# S

## Spotlights



## Bullet Surface Mount

### APPLICATION

Commercial / Residential Exterior

**BASE** Adjustable 320° swivel base

**COLOUR TEMP** Fixed colour, refer kelvins below

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 05

**IP RATING** 65

**MATERIAL** Powder coated anodised aluminium

**MOUNT** Surface

**TECH** Integrated LED

**TILT ANGLE** 45°

**VOLTAGE** 230V

**WARRANTY** 3 years

### OPTIONS



CODE	BBA08	BBA04
BEAM ANGLE	30°	23°
COLOUR	Black	Black
KELVINS	3500K	3500K
LUMENS	130lm	340lm
SIZE	Small	Medium
WATTS	2.6W	5.5W



# S

## Spotlights

### Hood Surface Mount

**APPLICATION**

Commercial / Residential  
Exterior

**BASE** Adjustable 320°  
swivel base

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 65

**MATERIAL** Powder coated  
anodised aluminium

**MOUNT** Surface

**TECH** Integrated LED

**TILT ANGLE** 45°

**VOLTAGE** 230V

**WARRANTY** 3 years



MORE INFO



IP RATING



WARRANTY

**MEDIUM**

Base Diameter  
Ø100 mm



**LARGE**

Base Diameter  
Ø120 mm



**OPTIONS**



CODE	BBA21	BBA25
BEAM ANGLE	23°	23°
COLOUR	Black	Black
KELVINS	3500K	3500K
LUMENS	570lm	830lm
SIZE	Medium	Large
WATTS	10.5W	17.5W





Image uses Eden SPC,  
refer page 157.





## Featured Spotlights – Interior

### SMT


Refer page 167



### Belle

Refer page 169



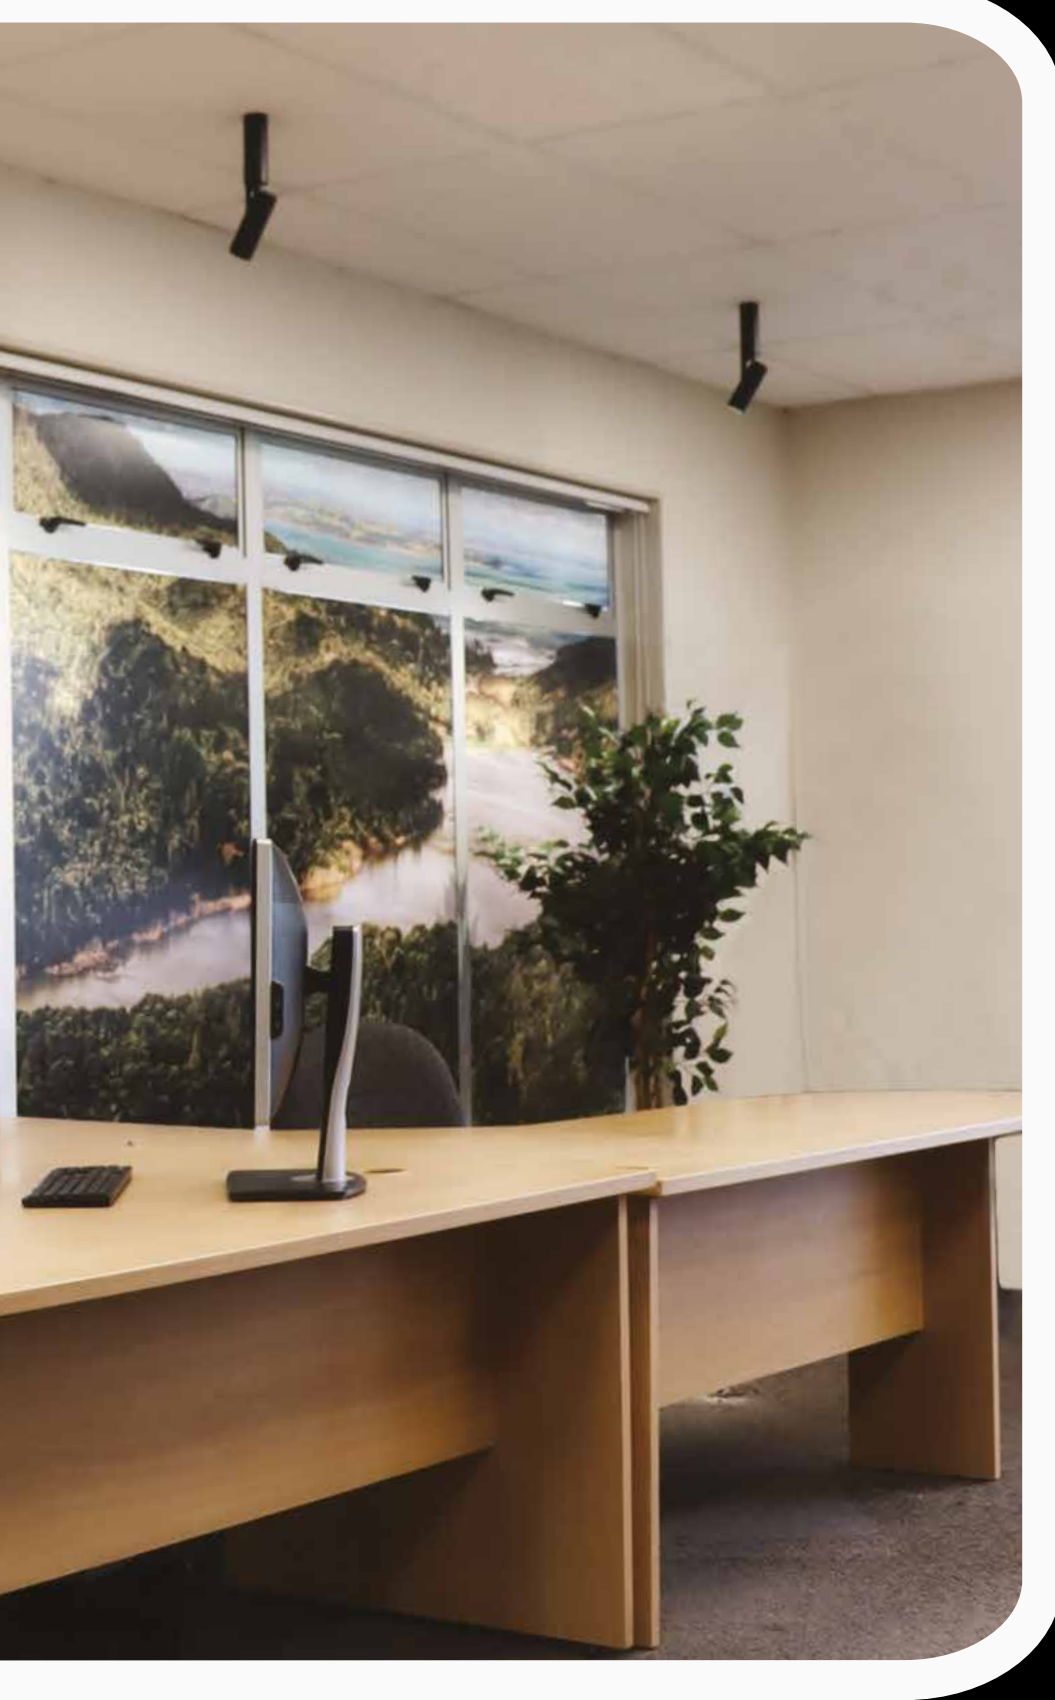

# Spotlights Interior

## Bijou

Refer page 168



## Glow

Refer page 170



# S

## Spotlights

### SMT

**APPLICATION**

Commercial  
Interior

**BEAM ANGLE** 40°

**COLOUR TEMP** Fixed colour  
refer kelvins below

**CRI** >80

**DIMMABLE** Yes

**DRIVER** Integral

**IP RATING** 20

**L70** 50,000hrs

**MATERIAL** Aluminium

**MOUNT** Surface

**SWIVEL BASE ANGLE** 355°

**TECH** Integrated LED

**TILT HEAD ANGLE** 85°

**VOLTAGE** 230V

**WARRANTY** 2 years



MORE INFO



IP RATING



DIMMABLE



WARRANTY



### OPTIONS

**CODE** SMT23-BLK

**COLOUR** Black

**KELVINS** 4000K

**LUMENS** 870lm

**WATTS** 13W



WARRANTY



DIMMABLE



IP RATING



MORE INFO

# S Spotlights

## Bijou Adjustable Head

**APPLICATION**

Residential Interior

**BEAM ANGLE** 36°

**CRI** >80

**DIMMABLE** Yes, refer to compatibility download online

**DRIVER** Built-in

**IP RATING** 20

**L70** 25,000hrs

**MATERIAL** Die-cast aluminium

**MOUNT** Surface

**POWER FACTOR** >0.9

**RATING** IC-F / IC-4

**SWIVEL** Head adjusts 355°

**TECH** Integrated COB LED

**TILT ANGLE** 90°

**VOLTAGE** 230V

**WARRANTY** 3 years

SMT80



SMT81



### OPTIONS



CODE	SMT80-WH	SMT80-BLK	SMT81-WH	SMT81-BLK
COLOUR	White	Black	White	Black
KELVINS	3000K	3000K	3000K	3000K
LUMENS	460lm	460lm	2 x 460lm	2 x 460lm
WATTS	8W	8W	16W	16W



# S

## Spotlights



MORE INFO



IP RATING



WARRANTY

## Belle

### APPLICATION

Commercial / Residential  
Interior

### BEAM ANGLE 24°

**COLOUR TEMP** Fixed colour,  
refer kelvins below

### CRI >90

### DIMMABLE No

### DRIVER Integral

### IP RATING 20

### MATERIAL Iron, aluminium

### MOUNT Surface

### TECH Integrated LED

### VOLTAGE 230V

### WARRANTY 5 years

Includes a USB port that  
works independently from  
light switch



## OPTIONS



CODE	AH29-BLK	AH29-WH	AH27-BLK	AH27-WH
COLOUR	Black	White	Black	White
KELVINS	3000K	3000K	3000K	3000K
LUMENS	200lm	200lm	200lm	200lm
TYPE	Round	Round	Rectangle	Rectangle
WATTS	3W	3W	3W	3W





WARRANTY



IP RATING



MORE INFO

# S Spotlights

## Glow Single Head 1 / 1S



SWITCHABLE MODEL SHOWN

**APPLICATION**

Residential  
Interior

**BAR SIZE (MM)** 110H x 25D

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DRIVER** Integral

**IP RATING** 20

**L70** 20,000hrs

**MATERIAL** Iron, acrylic

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 2 years

### OPTIONS



CODE	GLOW-1-WH	GLOW-1S-WH
COLOUR	White	White
KELVINS	3000K	3000K
LUMENS	320lm	320lm
SWITCH	No	Yes
WATTS	6W	6W



## Featured Step Lights

### Alona

Page 175



### Sheathe

Page 174





# Step Lights

## Lamina

Page 173



# S

## Step Lights

### Lamina Surface

**APPLICATION**  
Commercial / Residential  
Exterior / Interior

**BEAM ANGLE** 120°

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 09

**IP RATING** 65

**MATERIAL** UV resistant ABS,  
polycarbonate (suitable for  
coastal conditions)

**L70** 30,000hrs

**MOUNT** Surface

**OPERATING TEMP** -25° C to  
50° C

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

Includes both white and black  
cover in each box




MORE  
INFO



DUAL  
FASCIA





IP RATING



DOUBLE  
INSULATED



WARRANTY

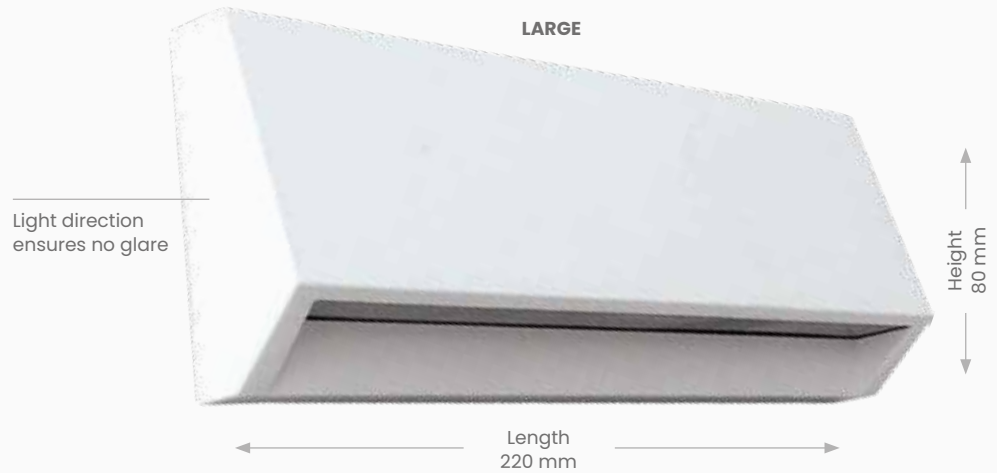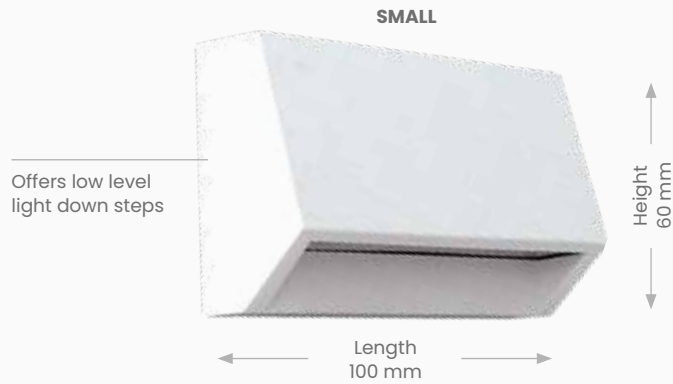

### OPTIONS



CODE	LSL100ICCT	LSL120ICCT
COLOUR	White & Black covers included	White & Black covers included
KELVINS	3000K / 4000K / 6000K	3000K / 4000K / 6000K
LUMENS	80lm / 100lm / 90lm	260lm / 300lm / 275lm
SIZE	Small	Large
WATTS	2W	3.8W






WARRANTY



DUAL FASCIA



IP RATING



DOUBLE INSULATED



MORE INFO

# S Step Lights

## Sheathe Surface

**APPLICATION**  
Commercial / Residential  
Exterior / Interior

**BEAM ANGLE** 120°

**COLOUR TEMP** Fixed colour and Tri-colour switchable, refer kelvins below

**DIMMABLE** No

**DRIVER** Integral

**IK RATING** 09

**IP RATING** 65

**MATERIAL** UV resistant ABS, polycarbonate (suitable for coastal conditions)

**L70** 30,000hrs

**MOUNT** Surface

**OPERATING TEMP** -25° C to 50° C


**TECH** Integrated LED

**VOLTAGE** 230V


**WARRANTY** 3 years

Includes both white and black cover in each box


### SMALL

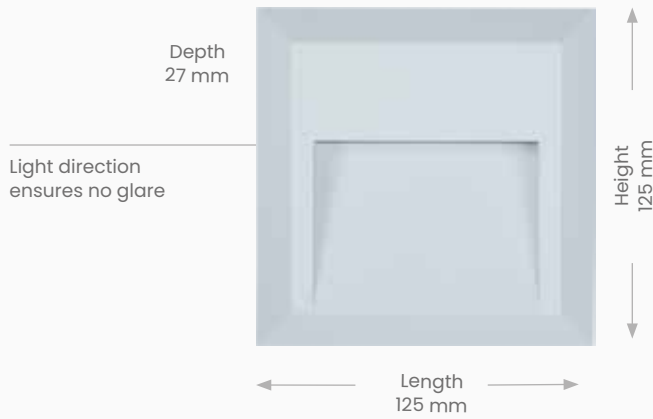

### LARGE

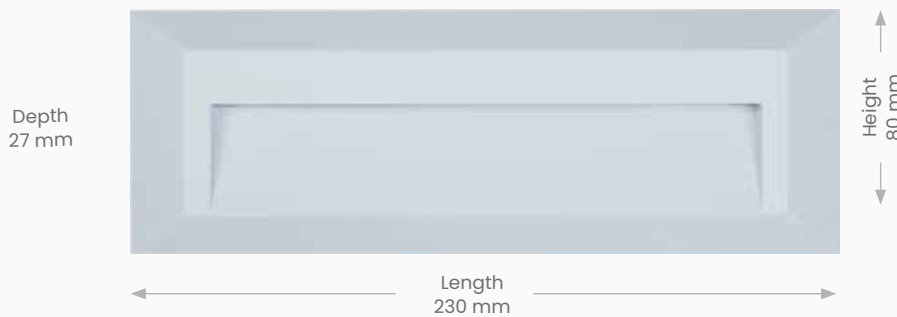

## OPTIONS



CODE	LSL1252CCT	LSL2302CCT
COLOUR	White & Black covers included	White & Black covers included
KELVINS	3000K / 4000K / 6000K	3000K / 4000K / 6000K
LUMENS	60lm / 70lm / 65lm	120lm / 140lm / 130lm
SIZE	Small	Large
WATTS	1.6W	3.5W

# S

## Step Lights



MORE INFO



IP RATING



WARRANTY

## Alona Recessed

### APPLICATION

Commercial / Residential  
Exterior / Interior

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**DRIVER** All fittings include  
700 mA LED driver

**IP RATING** 54

**L70** 30,000hrs

**MATERIAL** Anodised 6063  
aluminium, plastic recess  
sleeve

**MOUNT** Recessed

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 2 years

Mount with plastic recess  
sleeve or clipss

ROUND

Depth  
33mm



Diameter  
Ø55 mm

SQUARE

Depth  
33 mm



Width  
55 mm

Length  
55 mm



### OPTIONS

CODE	A350CLED-WH	A350SLED-AL
COLOUR	White	Brushed Aluminium
KELVINS	3000K	3000K
LUMENS	150lm	150lm
RECESS W/O CYLINDER (MM)	Ø40 x 29D	Ø40 X 29D
RECESS WITH CYLINDER (MM)	Ø50 x 55D	Ø50 x 55D
TYPE	Round	Square
WATTS	2W	2W



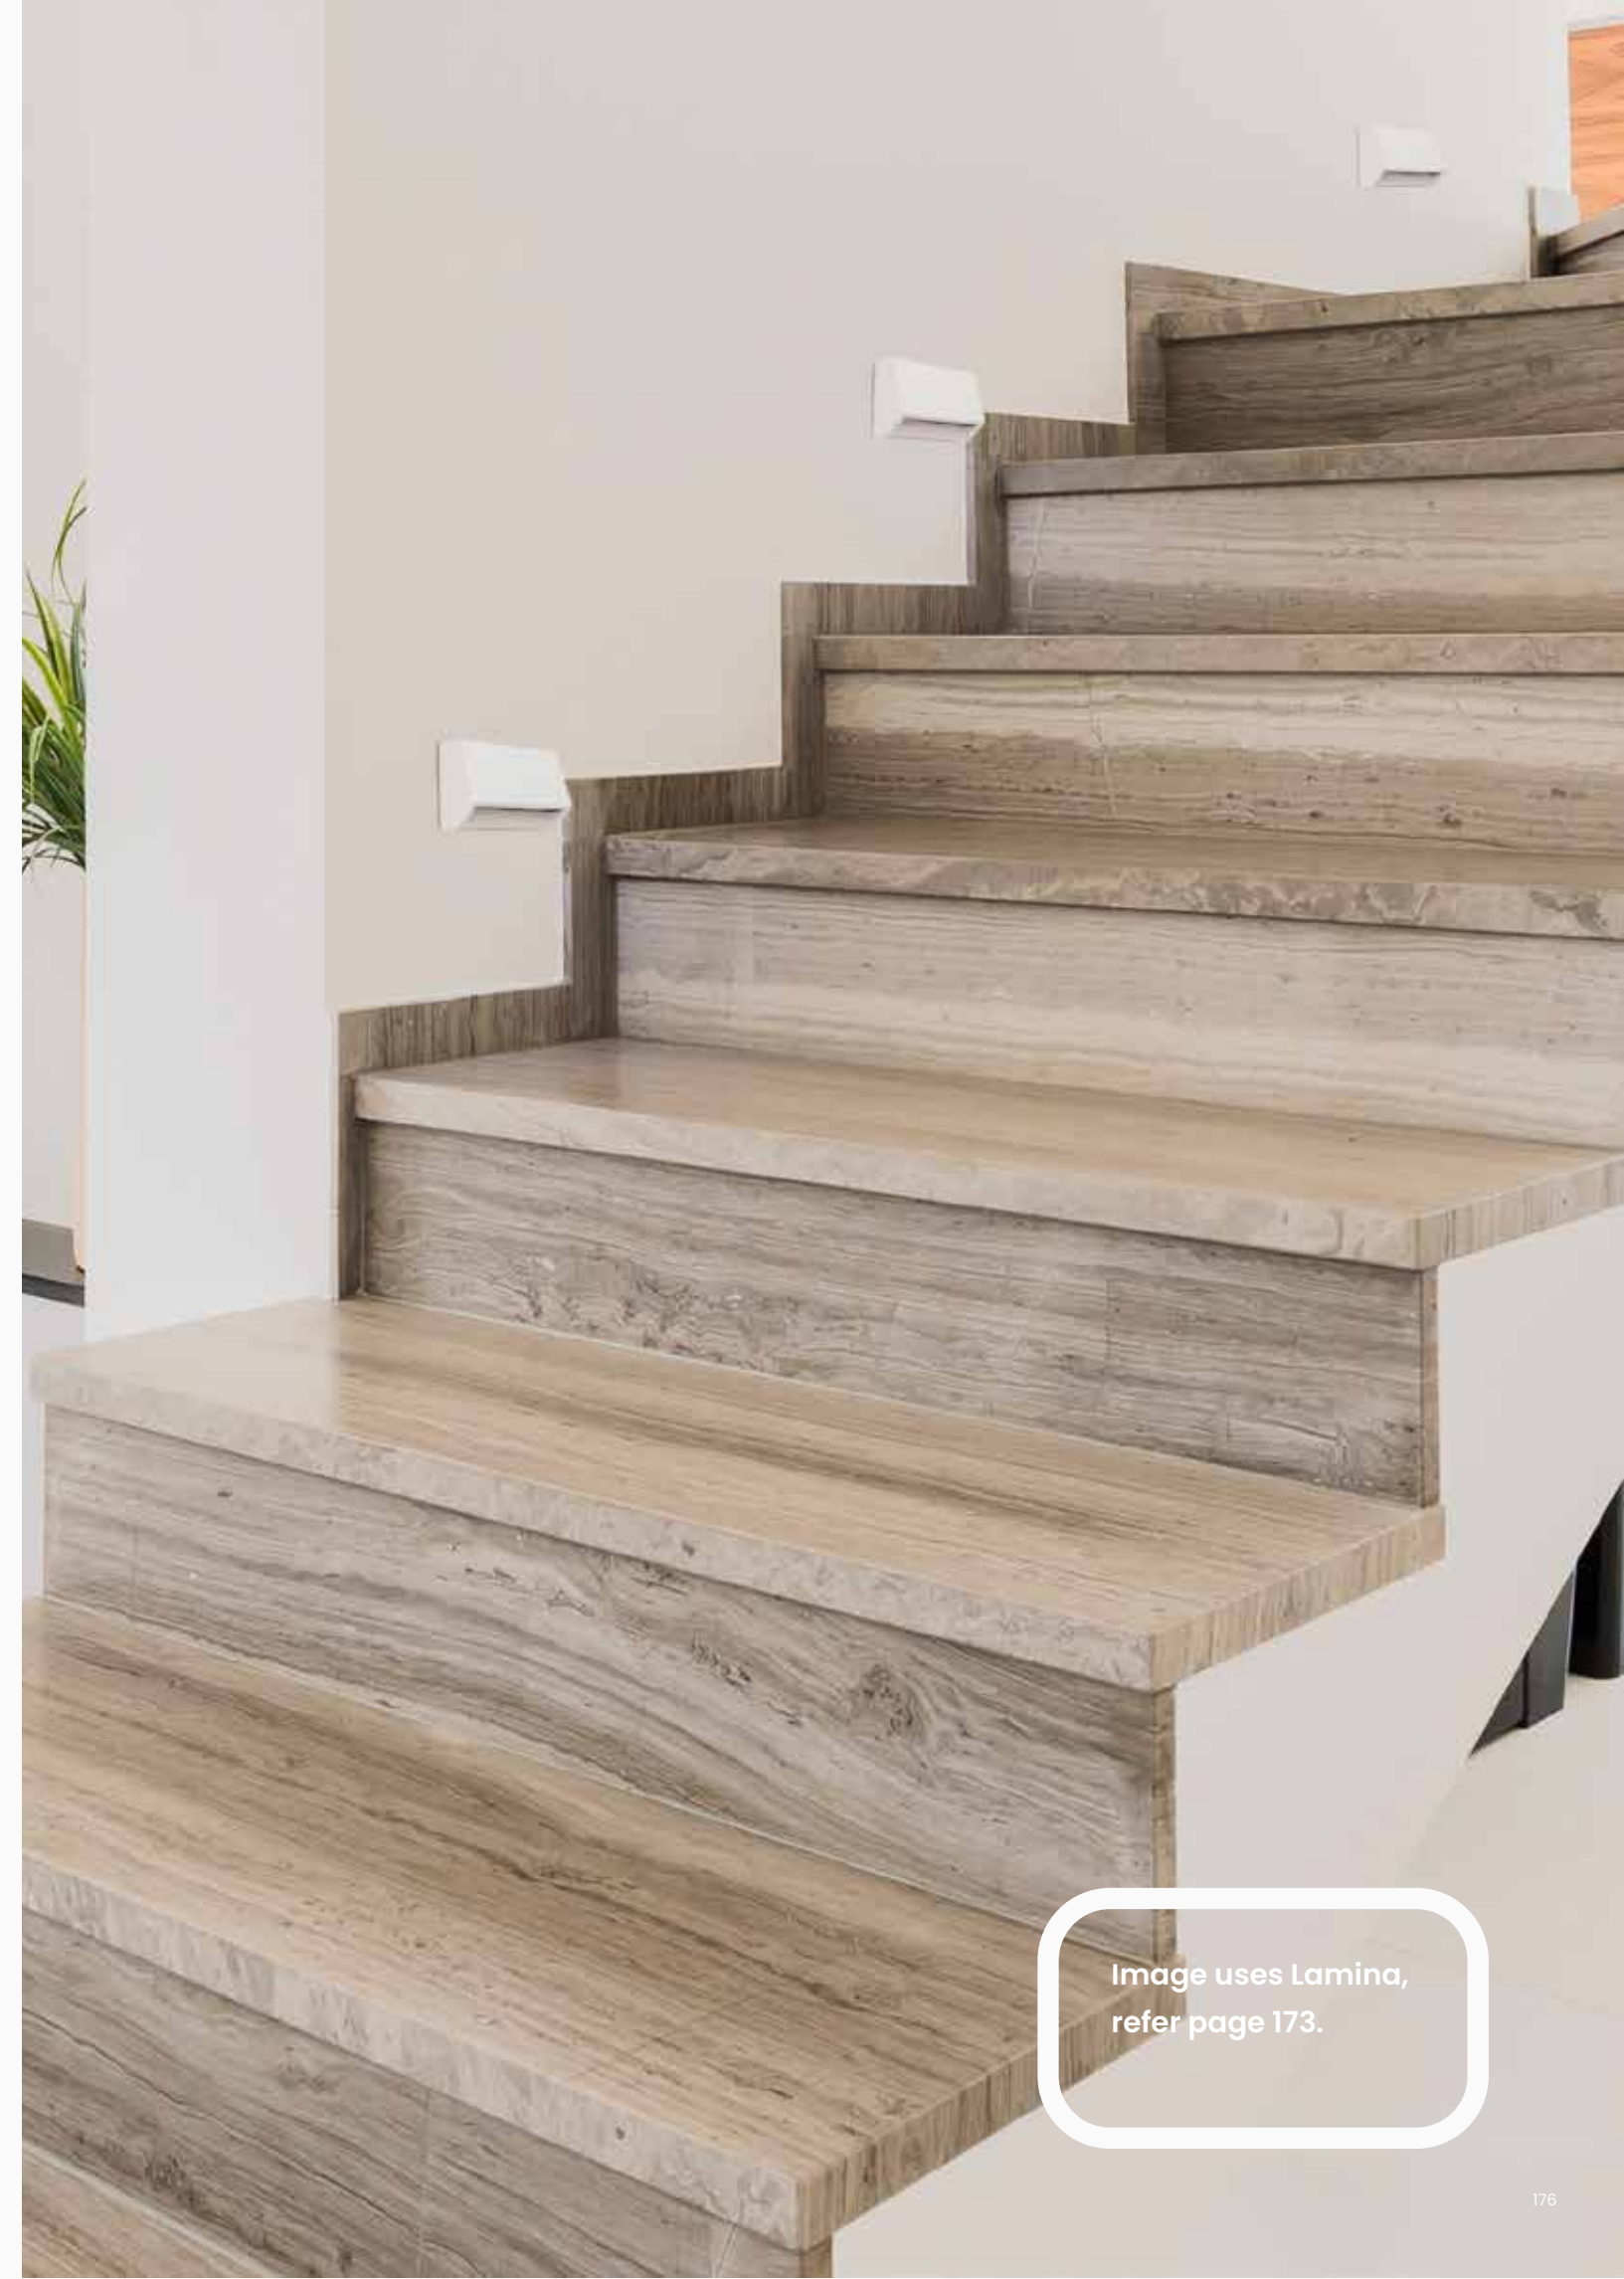


Image uses Lamina,  
refer page 173.



## Featured Uplighters

**BUL29**

Page 179



**BUL25**

Page 180



**BUL13**

Page 181





# Uplighters



## BUL17

Page 182



## BUL21

Page 183



# Uplighters



MORE INFO



IP RATING



WARRANTY

## Bul29 Inground Fixed

### APPLICATION

Residential  
Exterior

**CRI** >80

**DIMMABLE** No

**DRIVER** Requires separate  
24V DC Driver, refer page 68

**IK RATING** 08

**IP RATING** 67

**L70** 30,000hrs

**MATERIAL** 316 Stainless  
steel face and anodised  
6063 aluminium, with  
polycarbonate mounting  
recessed sleeve

**MOUNT** Recessed with  
mounting sleeve

**TECH** Integrated LED

**VOLTAGE** 24V DC

**WARRANTY** 3 years

Asymmetrical lens model, tilts  
light out of eyes



Height  
80 mm



Diameter  
Ø50 mm



### OPTIONS

**CODE** BUL29

**BEAM ANGLE** 20°-25°

**KELVINS** 3500K

**LUMENS** 145lm

**OPTICS** Asymmetrical

**RECESS SIZE (MM)** Ø62 x 95D

**WATTS** 3W



IP RATING



WARRANTY



MORE INFO

# U Uplighters

## Bul25 Inground Fixed



Height  
80 mm



Diameter  
Ø50 mm



### APPLICATION

Residential  
Exterior

**CRI** >80

**DIMMABLE** No

**DRIVER** Requires separate  
24V DC Driver, refer page 68

**IK RATING** 08

**IP RATING** 67

**L70** 30,000hrs

**MATERIAL** 316 Stainless  
steel face and anodised  
6063 aluminium, with  
polycarbonate mounting  
recessed sleeve

**MOUNT** Recessed with  
mounting sleeve

**TECH** Integrated LED

**VOLTAGE** 24V DC

**WARRANTY** 3 years

## OPTIONS

<b>CODE</b>	<b>BUL25</b>
<b>BEAM ANGLE</b>	30°
<b>KELVINS</b>	3500K
<b>LUMENS</b>	60lm
<b>OPTICS</b>	Symmetrical
<b>RECESS SIZE (MM)</b>	Ø62 x 95D
<b>WATTS</b>	3W

# Uplighters



MORE INFO



IP RATING



WARRANTY

## Bul13 Inground Fixed

### APPLICATION

Residential  
Exterior

**CRI** >80

**DIMMABLE** No

**DRIVER** Requires separate  
24V DC Driver, refer page 68

**IK RATING** 08

**IP RATING** 67

**L70** 30,000hrs

**MATERIAL** 316 Stainless  
steel face and anodised  
6063 aluminium, with  
polycarbonate mounting  
recessed sleeve

**MOUNT** Recessed with  
mounting sleeve

**TECH** Integrated LED

**VOLTAGE** 24V DC


**WARRANTY** 3 years



Height  
110 mm



Diameter  
Ø80 mm



### OPTIONS

**CODE** BUL13

**BEAM ANGLE** 23°

**KELVINS** 3500K

**LUMENS** 460lm

**OPTICS** Symmetrical

**RECESS SIZE (MM)** Ø76 x 125D

**WATTS** 5W





IP RATING



WARRANTY



MORE INFO

# U Uplighters



Height  
135 mm



Diameter  
Ø95 mm



## Bul17 Inground Fixed

### APPLICATION

Commercial  
Exterior

**CRI** >80

**DIMMABLE** No

**DRIVER** Requires separate  
24V DC Driver, refer page 68

**IK RATING** 08

**IP RATING** 67

**L70** 30,000hrs

**MATERIAL** 316 stainless  
steel face and anodised  
6063 aluminium, with  
polycarbonate mounting  
recessed sleeve

**MOUNT** Recessed with  
mounting sleeve

**TECH** Integrated LED

**VOLTAGE** 24V DC

**WARRANTY** 3 years

## OPTIONS

**CODE** BUL17

**BEAM ANGLE** 23°

**KELVINS** 3500K

**LUMENS** 640lm

**OPTICS** Symmetrical

**RECESS SIZE (MM)** Ø84 x 145D

**WATTS** 10W

# Uplighters



MORE INFO



IP RATING



WARRANTY

## Bul21 Inground Fixed

### APPLICATION

Commercial  
Exterior

**CRI** >80

**DIMMABLE** No

**DRIVER** Requires separate  
24V DC Driver, refer page 68

**IK RATING** 08

**IP RATING** 67

**L70** 30,000hrs

**MATERIAL** 316 stainless  
steel face and anodised  
6063 aluminium, with  
polycarbonate mounting  
recessed sleeve

**MOUNT** Recessed with  
mounting sleeve

**TECH** Integrated LED

**VOLTAGE** 24V DC

**WARRANTY** 3 years

Fitting supplied  
with 0.5m cable



Height  
145 mm



Diameter  
Ø120 mm



### OPTIONS

<b>CODE</b>	BUL21
<b>BEAM ANGLE</b>	23°
<b>KELVINS</b>	3500K
<b>LUMENS</b>	1450lm
<b>OPTICS</b>	Symmetrical
<b>RECESS SIZE (MM)</b>	Ø104 x 155D
<b>WATTS</b>	15W




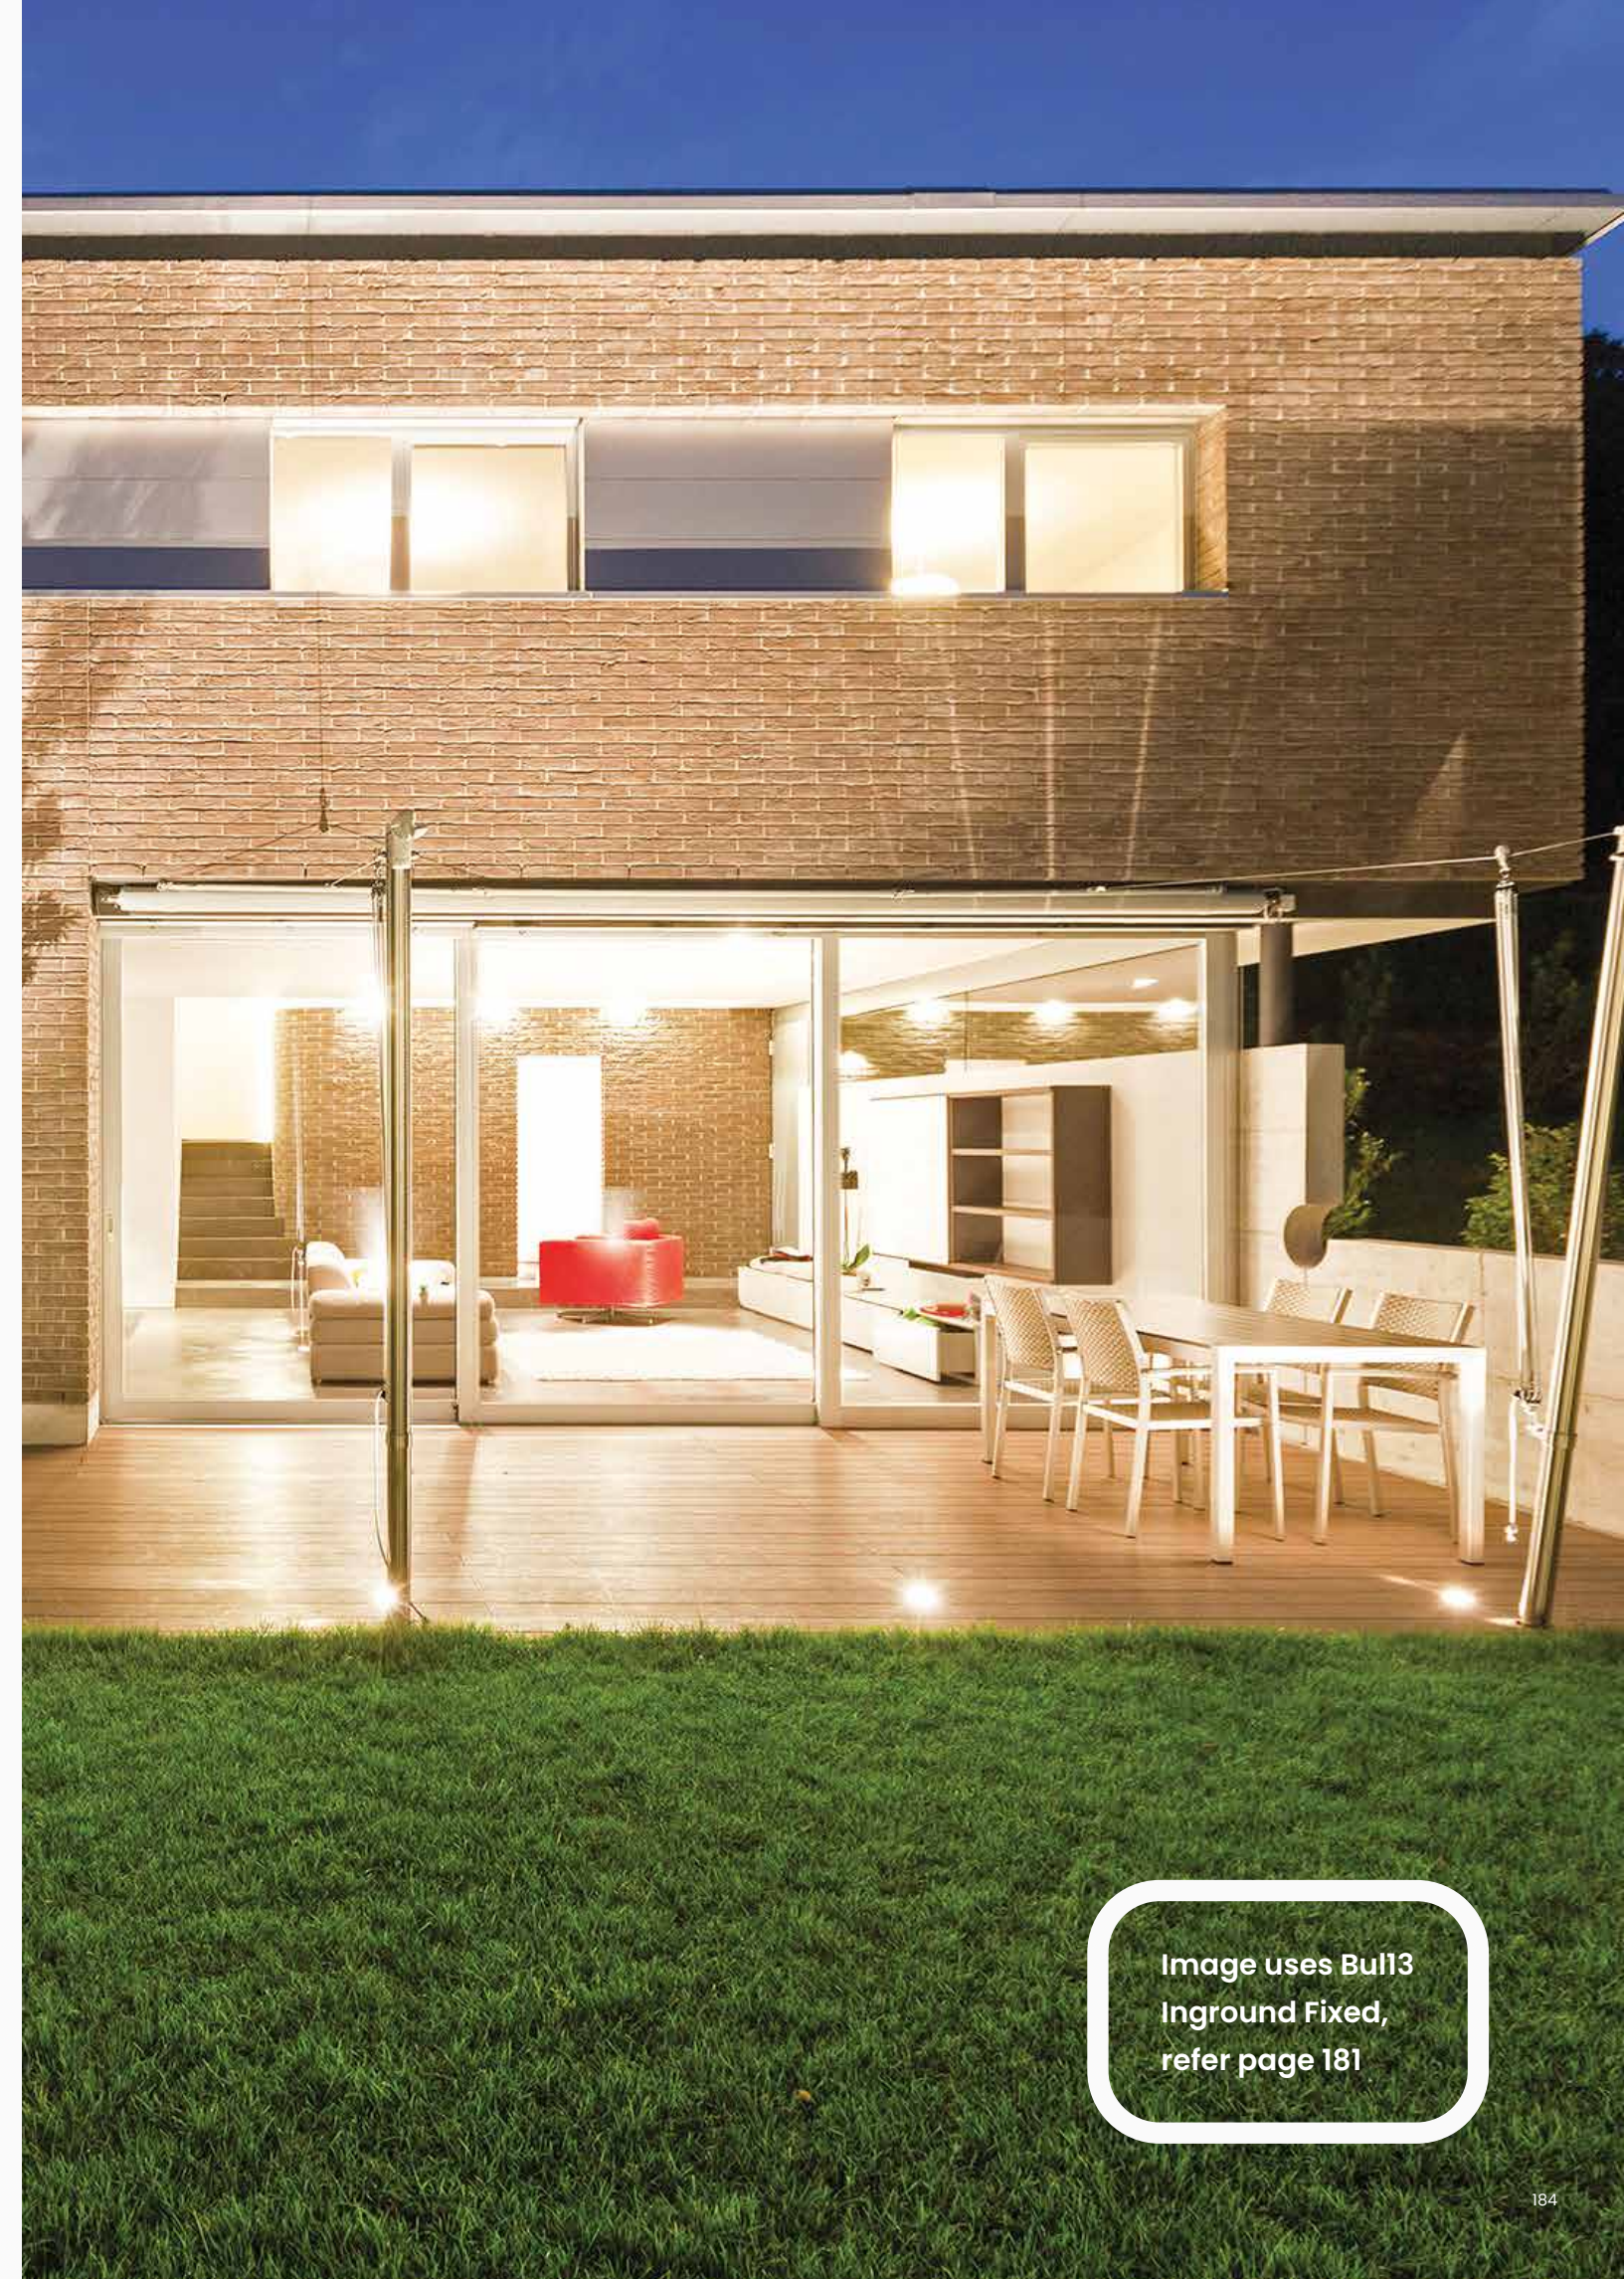


Image uses Bull3  
Inground Fixed,  
refer page 181



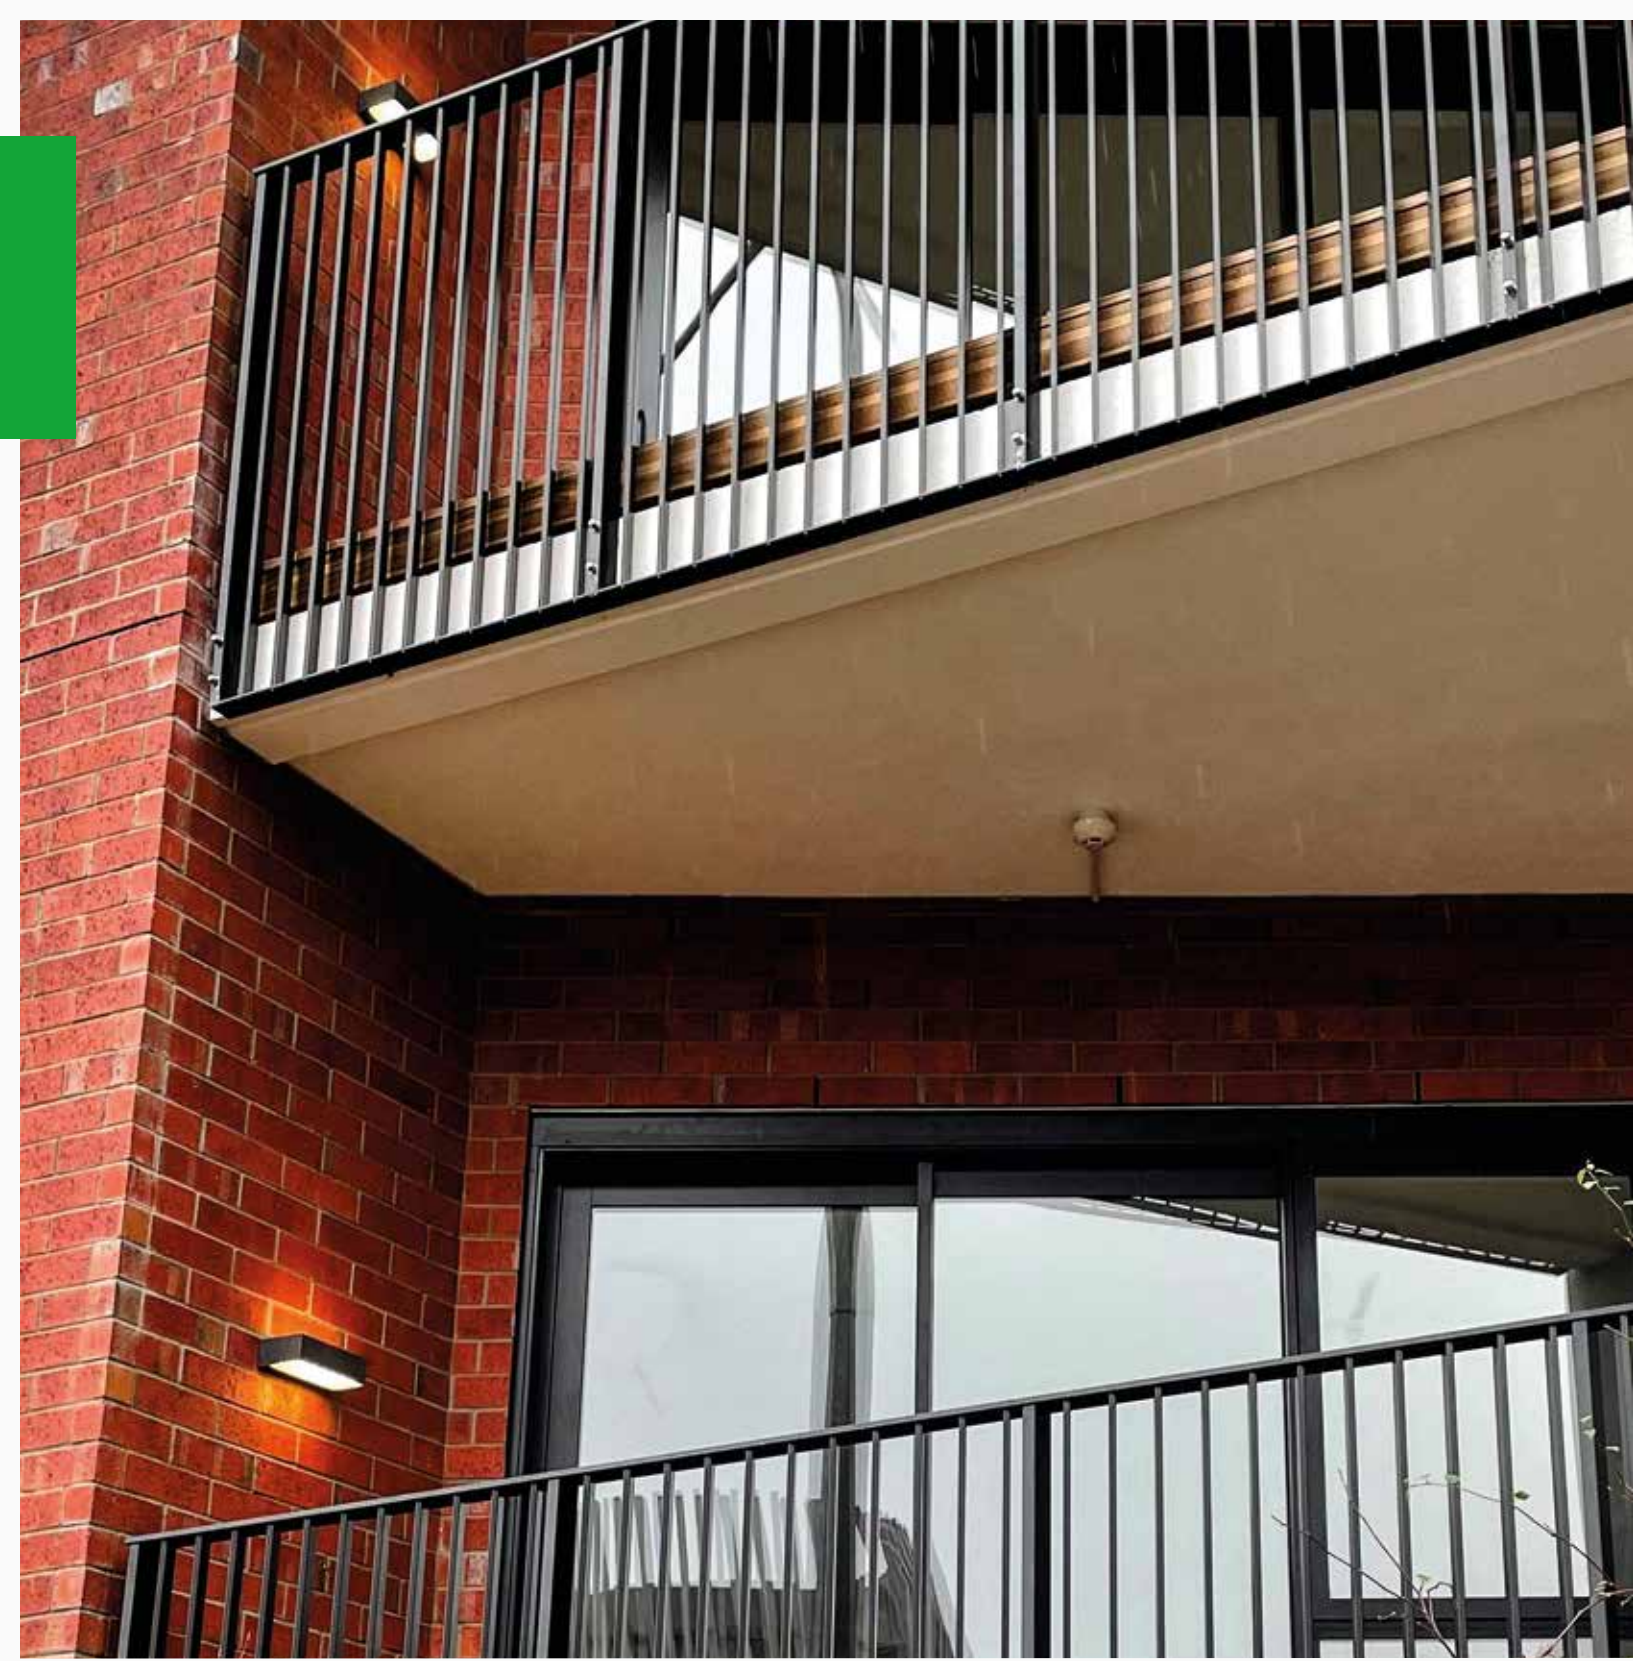

## Featured Wall Lights

### Byron Elite

Page 203



### Orthodox

Page 187



### Apical

Page 196





# Wall Lights

## Chameleon

Page 188



## Mia

Page 192





# W Wall Lights



MORE INFO



IP RATING



DIMMABLE



WARRANTY

## Orthodox

### APPLICATION

Commercial / Residential Interior

**COLOUR TEMP** Fixed colour, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer to compatibility download online

**DRIVER** Integral

**IP RATING** 20

**L70** 36,000hrs

**LIGHT DIRECTION** Up / Down




**MATERIAL** Aluminium

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 2 years

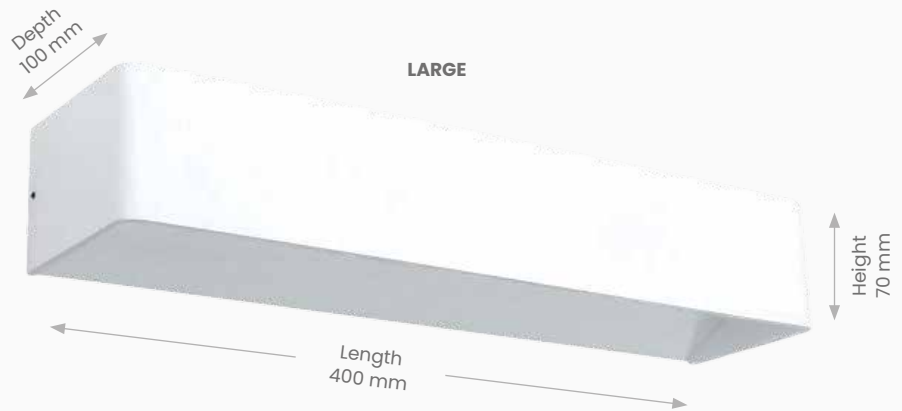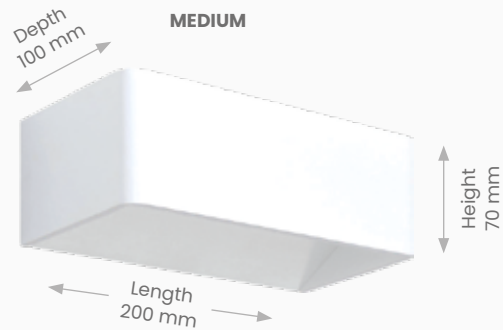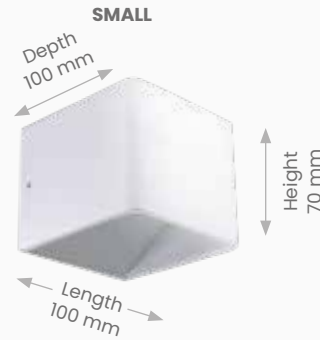

### OPTIONS



CODE	A023LED-WH	A024LED-AL	A024LED-WH	A024LED-BLKG	A025LED-AL	A025LED-WH
COLOUR	White	Aluminium	White	Black & Gold	Aluminium	White
KELVINS	3000K	3000K	3000K	3000K	3000K	3000K
LUMENS	280lm	800lm	800lm	800lm	1600lm	1600lm
TYPE	Small	Medium	Medium	Medium	Large	Large
WATTS	3W	8W	8W	8W	16W	16W





WARRANTY



IP RATING



DIMMABLE



MORE INFO

# W Wall Lights

## Chameleon Curved

PAINTABLE PLASTER

WHITE SANDSTONE

BLACK SANDSTONE



### APPLICATION

Commercial / Residential Interior

**COLOUR TEMP** Fixed colour, refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer to compatibility download online

**DRIVER** Integral

**IP RATING** 20

**L70** 60,000hrs

**LIGHT DIRECTION** 2-way

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

### OPTIONS



CODE	PLASTER8428	STONE8428-WH	STONE8428-BLK
COLOUR	Paintable Plaster	White Sandstone	Black Sandstone
KELVINS	3000K	3000K	3000K
LUMENS	2 x 250lm	2 x 250lm	2 x 250lm
MATERIAL	Paintable Plaster	Sandstone	Sandstone
WATTS	6W	6W	6W

# W

Wall Lights



MORE INFO



IP RATING



DIMMABLE



WARRANTY

## Chameleon Paintable Rectangle

### APPLICATION

Commercial / Residential  
Interior

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**CRI** >80

**DIMMABLE** Yes, refer to compatibility  
download online

**DRIVER** Integral

**IP RATING** 20

**L70** 60,000HRS

**LIGHT DIRECTION** 2-way

**MATERIAL** UV resistant ABS,  
polycarbonate

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years



### OPTIONS

<b>CODE</b>	PLASTER8429
<b>COLOUR</b>	Paintable Plaster
<b>KELVINS</b>	3000K
<b>LUMENS</b>	2 x 250lm
<b>WATTS</b>	6W



IP RATING



DIMMABLE\*



WARRANTY



MORE INFO

# W

Wall Lights

## Esther



### APPLICATION

Residential  
Interior

**\*DIMMABLE** Yes, lamp dependent

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Glass, metal

**VOLTAGE** 230V

**WARRANTY** 2 years

\*Dimmable only with a capable lamp



### OPTIONS

**CODE** KW199

**COLOUR** Glass, Brass, Gun Metal

**WATTS** 40W Max

# W

Wall Lights

## Estelle

### APPLICATION

Residential  
Interior

\***DIMMABLE** Yes, lamp dependent

### IP RATING 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Glass, metal

**VOLTAGE** 230V

**WARRANTY** 2 years

\*Dimmable only with a capable lamp



MORE INFO



IP RATING



DIMMABLE\*



WARRANTY



### OPTIONS

**CODE** KW200

**COLOUR** Glass, Brass, Black Metal

**WATTS** 40W Max



WARRANTY



IP RATING



DIMMABLE\*



MORE INFO

# W Wall Lights

## Mia Wall Lights



**APPLICATION**

Residential  
Interior

**\*DIMMABLE** Yes, lamp dependent

**DRIVER** Not required

**IP RATING** 20

**LAMP** Replaceable E27 (sold separately)

**MATERIAL** Metal

**MOUNT** Surface

**TECH** Replaceable LED

**VOLTAGE** 230V

**WARRANTY** 2 years

### OPTIONS



CODE	KW309-BLK	KW309-BR	KW309-WH
COLOUR	Black	Brushed Brass	White
WATTS	60W Max	60W Max	60W Max

# W

Wall Lights

## Alek

### APPLICATION

Residential  
Exterior

**CRI** >80

**DIMMABLE** No

**DRIVER** Built-in

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**IP RATING** 65

**L70** 30,000hrs

**MATERIAL** UV resistant ABS  
and polycarbonate

**MOUNT** Surface

**OPERATING TEMP** -25°C to  
55°C

**TECH** Integrated LED

**VOLTAGE** 230V


**WARRANTY** 3 years



MORE INFO



IP RATING



DOUBLE  
INSULATED



WARRANTY



## OPTIONS

**CODE** LDL2401-BLK

**COLOUR** Black

**KELVINS** 3000K

**LUMENS** 400lm

**WATTS** 6W





WARRANTY



IP RATING



MORE INFO

# W Wall Lights

## Melba

**APPLICATION**

Commercial / Residential Exterior

**COLOUR TEMP** Fixed colour, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 54

**L70** 30,000hrs

**LIGHT DIRECTION** Dual horizontal

**MATERIAL** Pre-treated corrosion resistant aluminium with electrophoretic coating

**MOUNT** Surface

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 2 years



### OPTIONS



CODE	RW7013K-WH	RW7013K-CH
COLOUR	White	Charcoal
KELVINS	3000K	3000K
LUMENS	2 x 200lm	2 x 200lm
WATTS	8W	8W

# W

## Wall Lights



MORE INFO



IP RATING



WARRANTY

## Wafer

### APPLICATION

Commercial / Residential  
Exterior

**BEAM ANGLE** 110°

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 54

**L70** 30,000hrs

**LIGHT DIRECTION** Up / Down

**MATERIAL** Anodised 6063  
aluminium (suitable for  
coastal conditions)

**MOUNT** Surface


**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 2 years

SMALL

Fixing Area  
89L x 70H  
x 16D mm

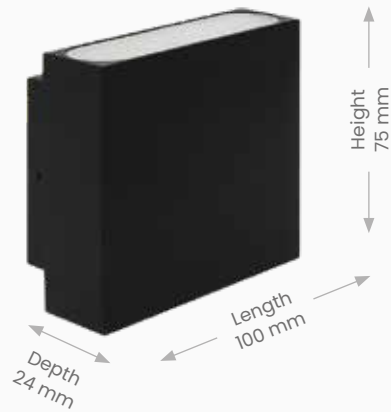

LARGE

Fixing Area  
169L x 70H  
x 16D mm



### OPTIONS




CODE	A0192LED-BLK	A0212LED-BLK
COLOUR	Black	Black
KELVINS	3000K	3000K
LUMENS	560lm	1600lm
TYPE	Small	Large
WATTS	6W	16W



IP RATING



WARRANTY




DOUBLE INSULATED



MORE INFO

# W Wall Lights

## Apical

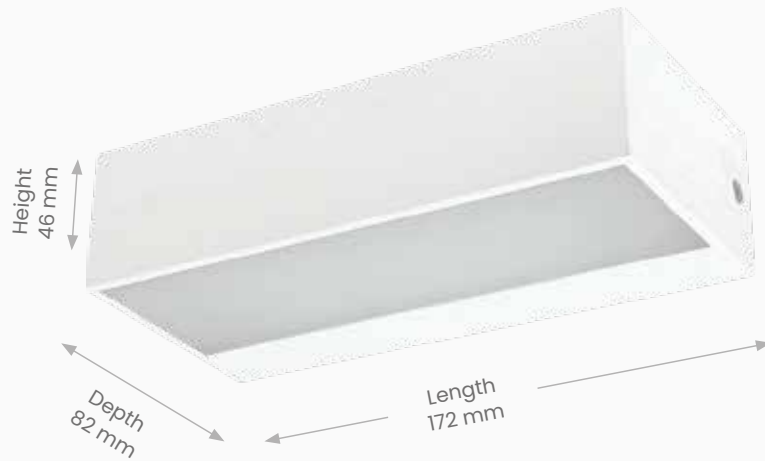

Fixing Area  
172L x 46H mm

**APPLICATION**

Commercial / Residential Exterior

**CLASS** Double insulated

**COLOUR TEMP** Fixed colour and Tri-colour switchable options, refer kelvins below

**CRI** >80

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 65

**L70** 20,000hrs

**LIGHT DIRECTION** Up / Down

**MATERIAL** UV resistant, anti-corrosion ABS, polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**OPERATING TEMP** -25°C to 55°C

**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 3 years

\*Single colour temperature options being phased out

### OPTIONS



CODE	LUD1701CCT-WH	LUD1701CCT-BLK
COLOUR	White	Black
KELVINS	3000K / 4000K / 6000K	3000K / 4000K / 6000K
LUMENS	460lm / 520lm / 500lm	460lm / 520lm / 500lm
SIZE	Small	Small
WATTS	9W	9W

# W

## Wall Lights



MORE INFO



IP RATING



WARRANTY

## Taco 2-way

### APPLICATION

Commercial / Residential  
Exterior

**BEAM ANGLE** 60°

**COLOUR TEMP** Fixed colour,  
refer kelvins below

**DIMMABLE** No

**DRIVER** Integral

**IP RATING** 54

**L70** 30,000hrs

**LIGHT DIRECTION** Up / Down

**MATERIAL** Anodised 6063  
aluminium

**MOUNT** Surface


**TECH** Integrated LED

**VOLTAGE** 230V

**WARRANTY** 2 years

Depth from wall  
88 mm

Fixing Area  
80L x 50W mm

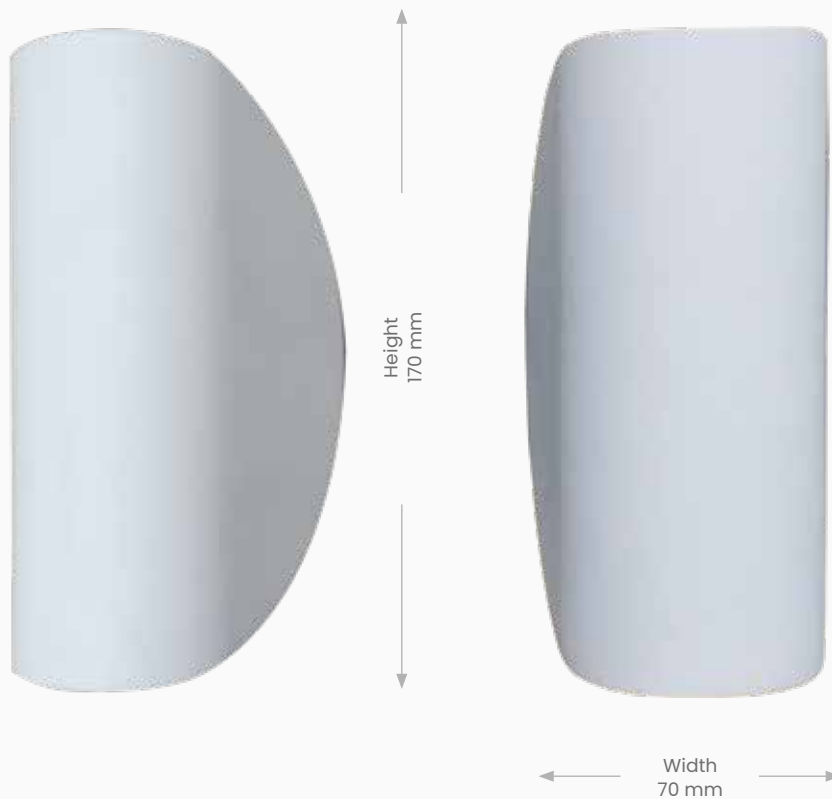

### OPTIONS

CODE	A1532LED-WH	A1532LED-BLK
COLOUR	White	Black
KELVINS	3000K	3000K
LUMENS	540lm	540lm
WATTS	6W	6W



Image uses  
Chameleon Curve,  
refer page 188

# W Wall Lights




MORE INFO



IP RATING



MORE INFO



IP RATING



WARRANTY

## Byron Square 2-way

### APPLICATION

Residential  
Exterior

**DIMMABLE** Lamp dependent\*

**IK RATING** 08

**IP RATING** 54

**LAMP** 2 x GU10 lamps  
(sold separately)

**LIGHT DIRECTION** Up / Down

**MATERIAL** UV resistant,  
anti-corrosion ABS,  
polycarbonate (suitable for  
coastal conditions)

**MOUNT** Surface

**TECH** Replaceable lamp

**VOLTAGE** 230V

**WARRANTY** 3 years

### SMALL

Depth from wall  
113 mm

Fixing Area  
100H x 65W mm



### LARGE

Depth from wall  
113 mm

Fixing Area  
100H x 65W mm



### OPTIONS



CODE	LUS2003L	LUS2003	LUS2203L	LUS2203
TYPE	Fitting with 2 x GU10 Lamps	Fitting without Lamps	Fitting with 2 x GU10 Lamps	Fitting without Lamps
COLOUR	Black	Black	Black	Black
SIZE	Small	Small	Large	Large
WATTS	2 x 10W Max	-	2 x 10W Max	-






IP RATING



DIMMABLE\*



DOUBLE INSULATED



WARRANTY



MORE INFO

# W Wall Lights

## Byron Square 1-way

### APPLICATION

Residential  
Exterior

**DIMMABLE** Lamp dependent\*

**IK RATING** 08

**IP RATING** 54

**LAMP** 1 x GU10 lamp  
(sold separately)

**LIGHT DIRECTION** Down only

**MATERIAL** UV resistant,  
anti-corrosion ABS,  
polycarbonate (suitable for  
coastal conditions)

**MOUNT** Surface

**TECH** Replaceable lamp

**VOLTAGE** 230V

**WARRANTY** 3 years



### OPTIONS



CODE	LUS1003L	LUS1003	LUS1103L	LUS1103
TYPE	Fitting with 1 x GU10 Lamp	Fitting without Lamp	Fitting with 1 x GU10 Lamp	Fitting without Lamp
COLOUR	Black	Black	Black	Black
SIZE	Small	Small	Large	Large
WATTS	10W Max	-	10W Max	-

# W Wall Lights



MORE INFO



IP RATING



DIMMABLE\*



WARRANTY

## Byron Round 2-way

### APPLICATION

Residential  
Exterior

**DIMMABLE** Lamp dependent\*

**IK RATING** 08

**IP RATING** 54

**LAMP** 2 x GU10 lamps  
(sold separately)

**LIGHT DIRECTION** Up / Down

**MATERIAL** UV resistant,  
anti-corrosion ABS,  
polycarbonate (suitable for  
coastal conditions)

**MOUNT** Surface

**TECH** Replaceable lamp

**VOLTAGE** 230V

**WARRANTY** 3 years

Depth from wall  
99 mm

Fixing Area  
100H x 65W mm



Depth from wall  
113 mm

Fixing Area  
100H x 65W mm



### OPTIONS



CODE	LUS2004L	LUS2004	LUS2204L	LUS2204
<b>TYPE</b>	Fitting with 2 x GU10 Lamps	Fitting without Lamps	Fitting with 2 x GU10 Lamps	Fitting without Lamps
<b>COLOUR</b>	Black	Black	Black	Black
<b>SIZE</b>	Small	Small	Large	Large
<b>WATTS</b>	2 x 10W Max	-	2 x 10W Max	-




WARRANTY



DIMMABLE\*



IP RATING



DOUBLE INSULATED



MORE INFO

# W Wall Lights

## Byron Round 1-way

### APPLICATION

Residential Exterior

**DIMMABLE** Lamp dependent\*

**IK RATING** 08

**IP RATING** 54

**LAMP** 1 x GU10 lamp (sold separately)

**LIGHT DIRECTION** Down only

**MATERIAL** UV resistant, anti-corrosion ABS, polycarbonate (suitable for coastal conditions)

**MOUNT** Surface

**TECH** Replaceable lamp

**VOLTAGE** 230V

**WARRANTY** 3 years

### SMALL

Depth from wall 99 mm  
Fixing Area 100H x 65W mm



### LARGE

Depth from wall 113 mm  
Fixing Area 100H x 65W mm



### OPTIONS



CODE	LUS1004L	LUS1004	LUS1104L	LUS1104
TYPE	Fitting with 1 x GU10 Lamp	Fitting without Lamp	Fitting with 1 x GU10 Lamp	Fitting without Lamp
COLOUR	Black	Black	Black	Black
SIZE	Small	Small	Large	Large
WATTS	10W Max	-	10W Max	-

# W

## Wall Lights



MORE INFO



IP RATING



DIMMABLE\*



WARRANTY

## Byron Elite Round 1-way

### APPLICATION

Residential/ Commercial  
Exterior

**DIMMABLE** Lamp dependent\*

**IK RATING** 06

**IP RATING** 65

**LAMP** 1 x GU10 lamp  
(sold separately)

**MATERIAL** Die-casting marine  
grade paint + clear glass lens

**MOUNT** Surface

**TECH** Replaceable lamp

**VOLTAGE** 230V

**WARRANTY** 5 years

Depth from wall  
120 mm



Diameter  
Ø90 mm

One-Way  
Light Distribution

### OPTIONS



CODE	LUS1005L	LUS1005
TYPE	Fitting with 1 x GU10 Lamp	Fitting without Lamp
COLOUR	Black	Black
WATTS	10W Max	-



WARRANTY



DIMMABLE\*



IP RATING



MORE INFO

# W Wall Lights

## Byron Elite Round 2-way



### APPLICATION

Residential/ Commercial Exterior

**DIMMABLE** Lamp dependent\*

**IK RATING** 06

**IP RATING** 65

**LAMP** 2 x GU10 lamp (sold separately)

**MATERIAL** Die-casting marine grade paint + clear glass lens

**MOUNT** Surface

**TECH** Replaceable lamp

**VOLTAGE** 230V

**WARRANTY** 5 years

### OPTIONS



CODE	LUS2205L	LUS2205
TYPE	Fitting with 2 x GU10 Lamps	Fitting without Lamps
COLOUR	Black	Black
WATTS	2 x 10W Max	-

# W

## Wall Lights

### Lantern

**APPLICATION**

Commercial / Residential  
Exterior

**DIMMABLE** Lamp dependent\*

**DRIVER** Not required

**IP RATING** 54

**LAMP** E27 lamp  
(sold separately)

**MATERIAL** Polycarbonate with  
glass diffuser

**MOUNT** Surface

**TECH** Replaceable lamp

**VOLTAGE** 230V

**WARRANTY** 2 years



MORE INFO



DIMMABLE\*



IP RATING



WARRANTY



### OPTIONS

**CODE** LWL382

**COLOUR** Black

**WATTS** 60W Max





WARRANTY



IP RATING



DIMMABLE\*



WARRANTY

# W

Wall Lights



Height  
402 mm

Depth from wall  
261 mm

Fixing Area  
118W x 188H mm



Diameter  
222 mm

## Lantern Reversible

### APPLICATION

Commercial / Residential  
Exterior

**DIMMABLE** Lamp dependent\*

**DRIVER** Not required

**IP RATING** 54

**LAMP** E27 lamp  
(sold separately)

**MATERIAL** Polycarbonate with  
glass diffuser (suitable for  
coastal conditions)

**MOUNT** Surface

**TECH** Replaceable lamp

**VOLTAGE** 230V

**WARRANTY** 2 years

### OPTIONS




**CODE** LWL632

**COLOUR** Black

**WATTS** 60W Max

# IP Zone Chart

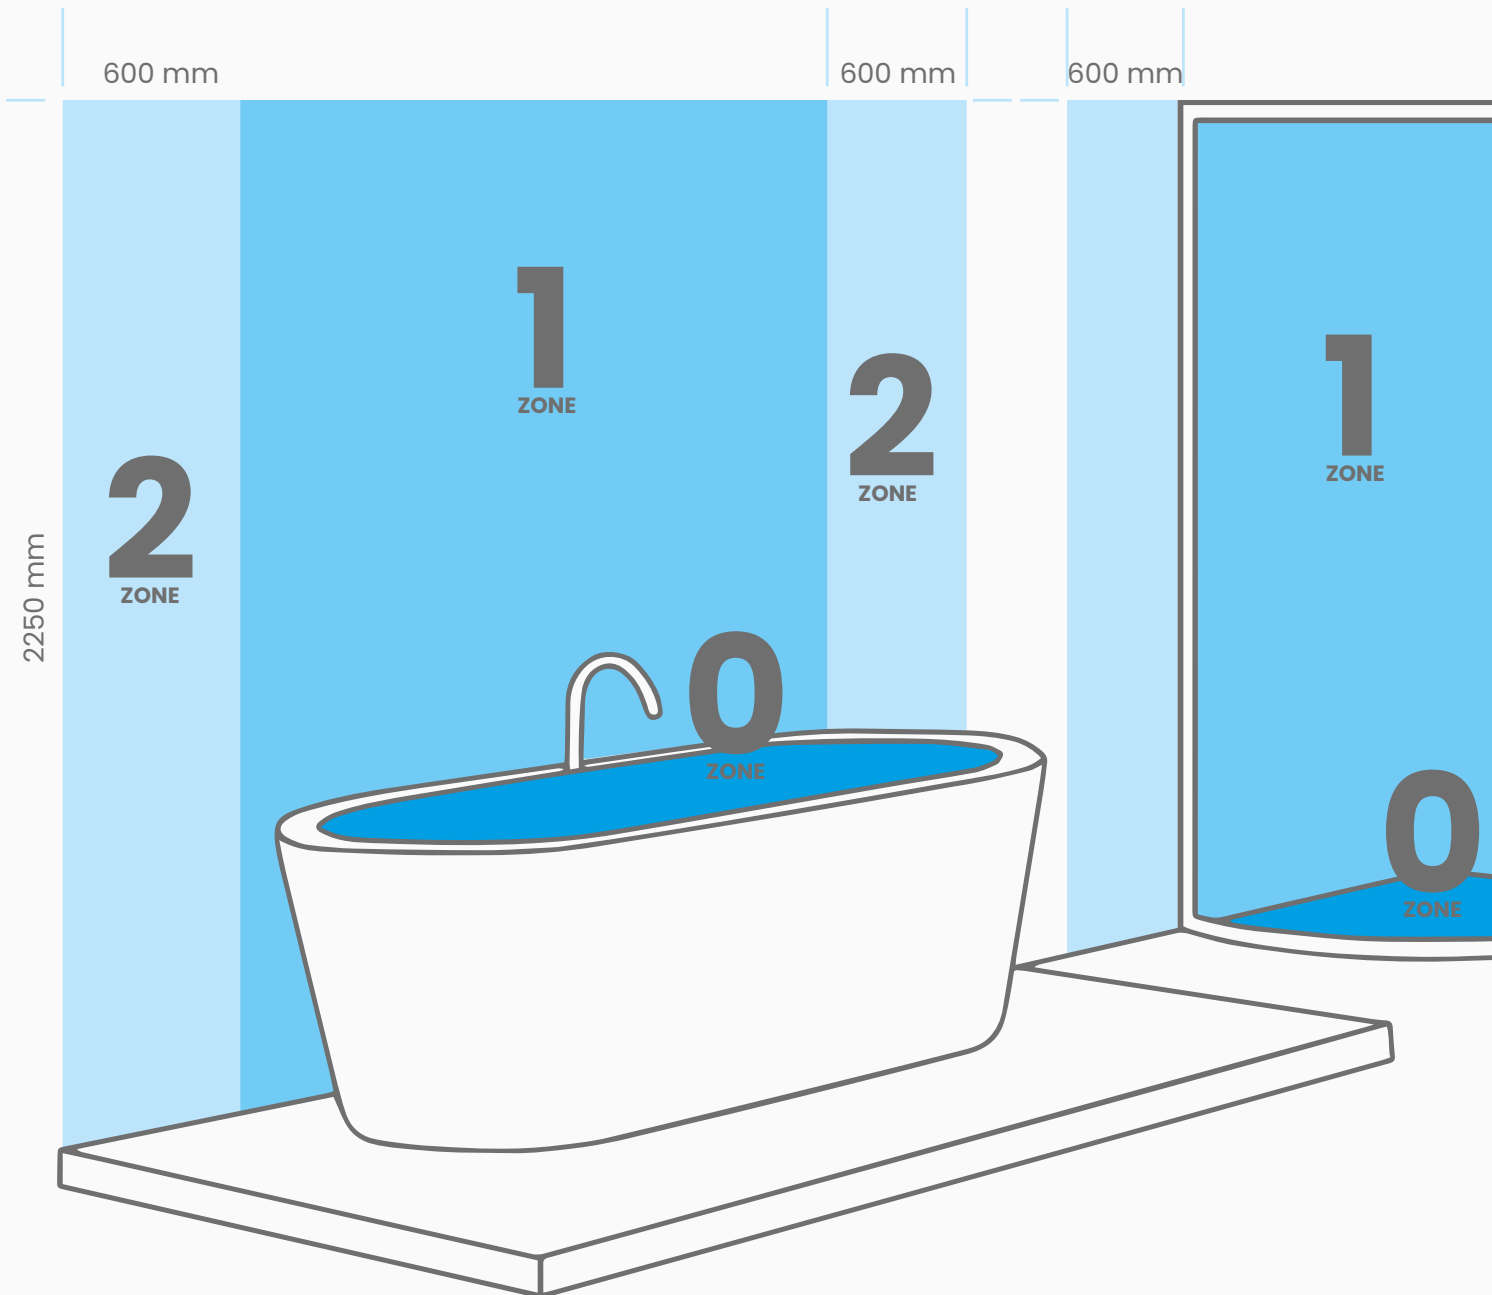


NEED HELP?



CONTACT US

This chart shows which areas are suitable for certain IP Ratings in your bathroom. Fixtures in Zone 0 require an IP rating of 67. Fixtures in Zones 1 and 2 require an IP Rating of 44.

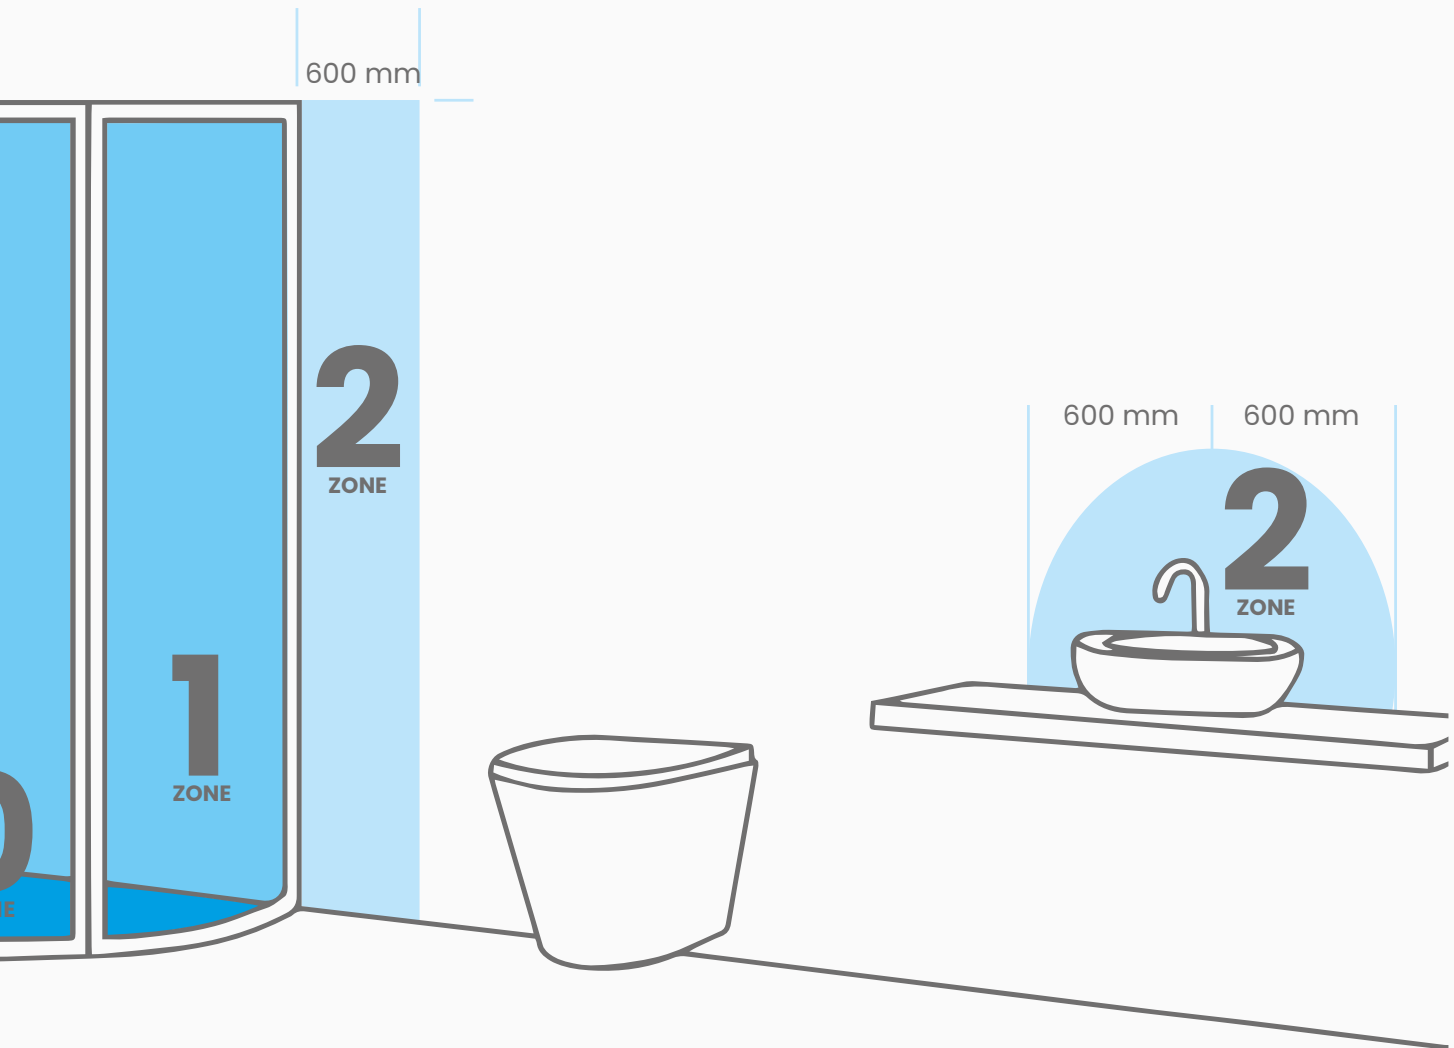

Suitable for **Zone 0**



Suitable for **Zone 1 & 2**

# IK Rating Chart

IK stands for  
**Impact Protection.**




**IK01**

It indicates the  
degree of protection  
provided against  
external impacts.


**IK01**

Protected against  
0.15 joules of impact  
(equivalent of a 200g  
object dropped from  
a height of 7.5cm)




**IK06**

Protected against  
1 joule of impact  
(equivalent of a 500g  
object dropped from  
a height of 20cm)




**IK02**

Protected against  
0.20 joules of impact  
(equivalent of a 200g  
object dropped from  
a height of 10cm)




**IK07**

Protected against  
2 joules of impact  
(equivalent of a 500g  
object dropped from  
a height of 20cm)




**IK03**

Protected against  
0.35 joules of impact  
(equivalent of a 200g  
object dropped from  
a height of 17.5cm)




**IK08**

Protected against  
5 joules of impact  
(equivalent of a 5kg  
object dropped from  
a height of 10cm)




**IK04**

Protected against  
0.50 joules of impact  
(equivalent of a 200g  
object dropped from  
a height of 25cm)




**IK09**

Protected against  
10 joules of impact  
(equivalent of a 5kg  
object dropped from  
a height of 20cm)




**IK05**

Protected against  
0.70 joules of impact  
(equivalent of a 500g  
object dropped from  
a height of 35cm)



**IK10**

Protected against  
20 joules of impact  
(equivalent of a 10kg  
object dropped from  
a height of 40cm)



# IP Rating Chart








IP stands for **Ingress Protection** and is formed with two numbers

IP44

The two numbers refer to two separate levels of protection

The first digit shows the level of protection against solid objects

The second digit shows the level of protection against water

- 0** No protection against contact and ingress 
- 1** Protection from solid objects larger than 50mm diameter (hands/large tools) 
- 2** Protection from solid objects larger than 12.5mm diameter (hands/large tools) 
- 3** Protection from solid objects larger than 2.5mm diameter (small tools/wires) 
- 4** Protection from solid objects larger than 1.0mm diameter (wires) 
- 5** Sufficient protection against entry of dust that interferes with equipment 
- 6** Complete dust protection (No ingress of dust) 

- 0** No protection 
- 1** Protection against vertically falling drops of water 
- 2** Protection against vertically falling water drops when tilted at 15° angle 
- 3** Protection against water spraying up to 60° on either side 
- 4** Protection against water spraying at all practicable angles 
- 5** Protection against low pressure water jets from all practicable angles 
- 6** Protection against powerful water jets from all practicable angles or heavy seas 
- 7** Protection against temporary submersion under defined conditions of pressure and time 
- 8** Protection against continuous submersion in water 

# Out of the box solutions made easy



This catalogue is printed on environmentally responsible paper using Elemental Chlorine Free (ECF) pulp, sourced from forests managed on a renewable and sustainable basis and manufactured under ISO 14001 Environmental Management System. Ink used is 100% vegetable based, mineral oil free and manufactured from 100% renewable sources.



Visit Us



Our Website